



2018–2019



IGNITION
PARTS

IGNITION & SENSOR SPECIALIST



Founded in 1936, the NGK Spark Plug Corporate Group, known around the globe as a leading manufacturer of spark plugs, has always developed ceramics as its core competence. Over the years, the company has established a track record of successfully applying the expertise gained in the field of ceramics to other areas to create new value.

Today, NGK Spark Plug is a leading manufacturer of ignition parts and vehicle electronics both for OEMs (Original Equipment Manufacturers) and the IAM (Independent Aftermarket) with over 80 years of experience. A total of 43 subsidiaries, 24 production plants, 5 Technical Centers and 14,500 employees around the world ensure optimum processes and a great wealth of knowledge.

The world leader in spark plugs and oxygen sensors, NGK | NTK has built a strong reputation for quality, reliability and a commitment to excellence. Now as then, the ignition and sensor specialist is dedicated to providing customers with world-class products and services.

In order to react more quickly to the global and regional changes of the market and the NGK | NTK environment, the company has switched from a central to a regional company management model. As a result, NGK Spark Plug Europe GmbH, based in Ratingen, Germany, became the EMEA Regional Headquarter in 2017 and has extended its responsibility from only Europe to include Middle East and Africa. Today, the EMEA markets are key to NGK Spark Plug's success, making up 25 percent of NGK's total global sales.



Facebook
facebook.com/ngkntk.emea



YouTube
youtube.com/ngksparkplugeurope



LinkedIn
linkedin.com/company/ngk-spark-plug-europe-gmbh

1979

Foundation of
NGK Spark Plug
Deutschland GmbH

1989

NGK **NTK**
SPARK PLUGS TECHNICAL CERAMICS
NGK SPARK PLUG EUROPE GmbH

NGK Spark Plug
Deutschland
becomes NGK Spark
Plug Europe

1997



First lambda sensor for
the Aftermarket available

2014



Introduction of NTK
exhaust gas temperature
sensors

2016



Launch of NTK MAP/MAF
sensors for the Aftermarket



Launch of the
sensor brand NTK

1982

Production plant in
Orléans (FR) and Technical
Center in Ratingen (DE)
start operation



Launch of V-Line,
the most successful
spark plug assortment

1991



Launch of NGK ignition
coils for the Aftermarket

2012

WELLS
VEHICLE ELECTRONICS

Acquisition of Wells,
a leading producer of
ignition coils and
sensors in the U.S.

2015

NGK Spark Plug Europe
takes over responsibility for
the EMEA region

Opening of the new
Regional Distribution Center
in Duisburg, Germany

2017

MANUFACTURERS

SNOWMOBILE SPARK













A		JOHN DEERE	36	SACHS	59
ARCTIC CAT	20	K		SCORPION	59
B		KAWASAKI	36	SKI-DOO/BOMBARDIER	59
BLADE	30	KIORITZ (ECHO)	37	SUZUKI	63
BOLENS	30	KOHLER	37	T	
BOMBARDIER	30	M		THREE R INDUSTRIES	63
BURAN	34	MONARK CRESCENT	38	TRAIL MANTA	64
C		MOTO-SKI => BOMBARDIER	38	X	
CANADIAN CURTIS WRIGHT	34	N		XENOAH ENGINES	64
CCW ENGINES	34	NPO SATURN	38	Y	
CHAPARRAL	35	O		YAMAHA	64
E		OCKELBO	38		
ECHO => KIORITZ	35	OMC	38		
EVINRUDE => OMC	35	P			
H		POLARIS	39		
HIRTH	35	R			
I		REDLINE	58		
IKAR	35	ROLL-O-FLEX	58		
ILO-ROCKWELL	35	RUPP	58		
J		S			



IGNITION
PARTS



VEHICLE
ELECTRONICS


 	2 – 3
  	4
 Series	5 – 17
  	18
 	19 – 65
 Cross Reference Guide → NGK	66 – 117
Discontinued Products	118 – 127
Disclaimer	128



04/2018



How to read our part number: Spark Plugs





B P R 5 E S - 11



Unit : mm


B			P		R		5		E		S		-11					
	Thread size	Hex size	Structure		Resistor		Heat rating		Thread length		Design features		Spark gap					
A	ø 18.0	Hex 25.4	P	Projected insulator type	R	Resistor	2	 Hot type Cold type	E	19.0	B	Integral terminal (CR8EB)	None	Motorcycle : 0.7~0.8 Car : 0.8~0.9				
B	ø 14.0	Hex 20.8			Z	Inductive resistor type	4		EF	17.5	CM	Slant ground electrode Compact type (Exposed insulator length: 18.5)						
BC	ø 14.0	Hex 16.0	M	Small spark plug			5		EH	19.0 half-thread	CS	Slant ground electrode	-8	0.8				
BK	ø 14.0	Hex 16.0					6		H	12.7			-9	0.9				
C	ø 10.0	Hex 16.0	U	Surface gap, Semi-surface discharge gap or Supplementary gap			7		L	11.2	G,GV	Racing spark plug	-10	1.0				
D	ø 12.0	Hex 18.0					8		None	Tapered seat type A(P)-F : 10.9 B(P)-F : 11.2 BM(P)-F : 7.8 Small type plug B(P)M- : 9.5 B-LM : 9.5 CM- : 9.5 CM-6 : 8.6 C-50 : 8.5			I	Iridium central electrode				
DC	ø 12.0	Hex 16.0					9						-11	1.1				
E	ø 8.0	Hex 13.0					10						-13	1.3				
*Exception B(P)M-A,Y : ø 14.0, Hex 19.0 P(P)-(E)F : ø 14.0, Hex 16.0 CM-6 : ø 10.0, Hex 14.0 BC : Old JIS standard size The length from gasket surface to terminal contact is 53.0mm. BK : ISO / JIS standard size The length from gasket surface to terminal contact is 50.5mm.																		

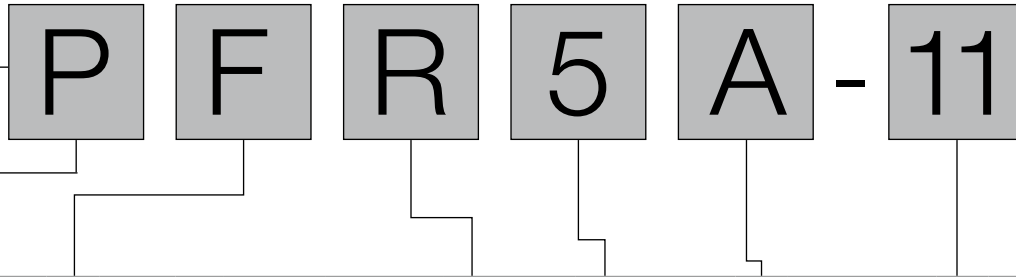How to read our part number: Spark Plugs




Unit : mm

P		F				R		5		A		-11						
Plug type			Thread diameter	Thread length	Seat configuration	Hex size		Resistor		Heat rating		Design		Spark gap				
DI	High ignitability plug: Double fine electrodes	F	ø 14.0	19.0	Gasket	Hex 16.0		R	Resistor	2	Hot type	A,B,C... Suffix code		None	Motorcycle : 0.7~0.8			
		FE	ø 14.0	19.0	Gasket	Hex 16.0				4		Car : 0.8~0.9						
I	Double iridium spark plug	G	ø 14.0	19.0	Gasket	Hex 20.8				5				-7	0.7			
L	Long thread reach plug	J	ø 12.0	19.0	Gasket	Hex 18.0				6			-9	0.9				
P	Double platinum spark plug	K	ø 12.0	19.0	Gasket	Hex 16.0				7			I	Iridium central electrode	-10	1.0		
S	High ignitability plug : thin square tip type	KA	ø 12.0	19.0	Gasket	Hex 14.0				8					-11	1.1		
Z	Projected firing end	KB	ø 12.0	19.0	Gasket	Bi-Hex 14.0 (Bi-hexagonal *)				9		Cold type	IX	Iridium IX spark plug	-13	1.3		
										10					-15	1.5		
Above alphabets are occasionally used in combination		KE	ø 12.0	19.0	Gasket	Hex 16.0								*When there is „I“ or „P“ at the beginning of part number („I“ or „P“ after heat rating becomes suffix code.)		-A	Non gasket	
<Example>ILFR..., PLZFR...,		KF	ø 12.0	19.0	Gasket	Hex 14.0								I		-D	Metal shell : nickel plating	
When „L“ is included, priority is given to „L“ (long reach) in thread length.		KG	ø 12.0	19.0	Gasket	Bi-Hex 14.0 (Bi-hexagonal *)								L		-E	Special resistance	
<Example>		L	ø 10.0	12.7	Gasket	Hex 16.0								MA		-G	Copper cored ground electrode	
*Gasket type		M	ø 10.0	19.0	Gasket	Hex 16.0								MF		-H	Special thread shape	
FR5AP : Thread length 19.0mm		MA	ø 10.0	19.0	Gasket	Hex 14.0								NA		-J	2 ground-electrode	
LFR5AP-11 : Thread length 26.5mm		MF	ø 10.0	19.0	Gasket	Hex 14.0								T		-K	Vibration-resistance ground electrode	
*Tapered seat type		NA	ø 12.0	17.5	Tapered seat	Hex 14.0								U		-N	Special ground electrode	
PTR5C-13 : Thread length 17.5mm		T	ø 14.0	17.5	Tapered seat	Hex 16.0								W		-Q	4-ground-electrode	
PLTR6A-10G : Thread length 25.0mm		U	ø 14.0	11.2	Tapered seat	Hex 16.0								X		-S	Special gasket	
		W	ø 18.0	10.9	Tapered seat	Hex 20.8								Y		-T	3-ground-electrode	
		X	ø 14.0	9.5	Gasket	Hex 20.8										-U	Semi-surface discharge type	
		Y	ø 14.0	11.2	Tapered seat	Hex 16.0										IX-P	Iridium MAX plug	
					Bi-hexagonal									LPG 1-8		LaserLine spark plugs range for gas engines		
																		
					Hexagonal													
																		




RE 7 C - L

RE		7	C		-L	
Plug type		Heat rating	Design		Spark gap	
RE	Plug for rotary engines	5	A,B,C--Suffix code		-L	Leading position
SD	Plug for rotary engines (Semi-surface discharge gap)	6			-T	Trading position
		7				
		8				
		9				
		10				
		11				



HB 6 A IX - 11 P

HB		6	A				IX	-11		P
Plug type		Heat rating	Thread diameter	Thread length	Seat configuration	Hex size	Spark gap			
HB	HYBD (3-ground-electrode hybrid type)	4	A	Ø 14.0	20.5	Gasket	Hex 16.0	IX	-8	0.8
		5	B	Ø 14.0	19.0	Gasket	Hex 16.0		-9	0.9
		6							-10	1.0
		7							-11	1.1
		8							-13	1.3



DF 6 H - 11 A

DF		6		H				-11		A		
Plug type		Heat rating			Thread diameter	Thread length	Seat configuration	Hex size	Spark gap			
DF	High ignitability plug (Double fine electrodes)	4	 Hot type	A	ø 14.0	19.0	Gasket	Hex 16.0	-8	0.8	A,B,C... Suffix code	
		5		B	ø 14.0	26.5	Gasket	Hex 16.0	-9	0.9		
DFH	High ignitability plug (DF + Hybrid type)	6		C	ø 12.0	26.5	Gasket	Hex 14.0	-10	1.0		
		7		*DF6H-11A : Thread length 28.0mm						-11	1.1	
		8								-13	1.3	
		9	Cold type							-15	1.5	



Tightening torques for spark plugs

Torques

A torque wrench is required for the professional installation of a spark plug. Even for professionals the estimation of the tightening torque is nearly impossible.

That is because a torque can be calculated from two sizes which are multiplied by one another: the force which is applied to the respective centre of rotation and the length of the handle.

Most spark plug failures can be traced back to an incorrect tightening torque. If it is set too low, there is a risk of compression losses and overheating. A break of the insulator or middle electrode as a result of vibrations is also feasible.

If the tightening torque is set too high, the spark plug can snap off. The casing can also expand or warp. Heat dissipation zones are disrupted, overheating and melting of the electrodes or even engine damage can occur.

Cylinder head material	Spark plug with flat seat (with gasket)				Spark plug with conical seat	
	Thread diameter				Thread diameter	
	18 mm	14 mm	12 mm	10 mm	18 mm	14 mm
Cast iron head	35-45 Nm	25-35 Nm	15-25 Nm	10-15 Nm	20-30 Nm	15-25 Nm
Aluminium head	35-40 Nm	25-30 Nm	15-20 Nm	10-12 Nm	20-30 Nm	10-20 Nm

The torques depend on the cylinder head material and the thread diameter.

Tightening torques for glow plugs

The correct torque

For the professional installation of a glow plug, the use of a torque wrench is recommended. Even for professionals the estimation of the tightening torque is nearly impossible.

That is because a torque can be calculated from two sizes which are multiplied by one another: the

force which is applied to the respective centre of rotation and the length of the handle.

If the incorrect torque is applied to a glow plug, a compression loss can result. Based on the vibrations, it is also possible in the case of ceramic glow plugs that the ceramic will break.

The application of a tightening torque which is too great, in particular, can lead to the contraction of the annular gap between the metal case and glow tube. In this case the glow plug overheats and fails.

! Please follow the instruction if specified tightening torque or angle is mentioned on the package !!!

Metal Glow Plug					Ceramic Glow Plug	
Thread diameter					Thread diameter	
M8	M9	M10	M12	M14	M8	M10
8,5 Nm	11 Nm	15 Nm	23 Nm	23 Nm	10 Nm	18 Nm
+/- 10	+/- 10	+/- 10	+/- 10	+/- 10	+/- 10	+/- 10

Tightening torque for the connecting nuts	
Thread diameter	Tightening torque
4 mm (M4)	0,8–1,5 Nm
5 mm (M5)	3,0–4,0 Nm

Glow plugs will only function faultlessly when they are screwed in with the correct torques.



SERIES



IGNITION
PARTS

SERIES OF NGK SPARK PLUGS

NGK ZÜNDKERZENSERIEN


SÉRIES DES BOUGIES NGK




SERIES DE BUJÍAS DE ENCENDIDO NGK TYPBETECKNINGAR FÖR NGK TÄNDSTIFT


STANDARD TYPES





STANDARD AUSFÜHRUNGEN
TIPOS ESTÁNDARES


TYPES STANDARDS
STANDARDTYPER


	NON-RESISTOR NON-RÉSISTANCE ICKERESISTOR		OHNE WIDERSTAND NO-RESISTOR	RESISTOR RÉSISTANCE RESISTOR	MIT WIDERSTAND RESISTOR
ϕ 14mm × 9.5mm Hex 20.8mm Fig.①Ⓐ		B-2 B-4 B6S B7S B8S		BR6S	
	Fig.①Ⓒ	BP-4 BP5S BP6S			
ϕ 14mm × 19.0mm Hex 20.8mm Fig.②Ⓐ		B4ES B5ES B6ES,-11 B7ES,-11 B8ES B9ES B10ES		BR4ES BR5ES BR6ES,-11 BR7ES BR8ES,-11 BR9ES BR10ES	
	Fig.②Ⓑ			BR6EB-L-11	
	Fig.②⒣			BR8EYA BR9EYA BR10EYA	
	Fig.②Ⓓ	BP2ES,BP-2E BP4ES,-11 BP5ES,-11,-13 BP6ES,-11 BP7ES,-11 BP8ES BP9ES	BP5ESZ BP6ESZ	BPR2ES,BPR-2E BPR4ES,-11,-13 BPR5ES,-11,-13 BPR6ES,-5,-11 BPR7ES,-11 BPR8ES,-6 BPR9ES	
	Fig.③Ⓔ			BPR6EKN BPR7EKN	
	Fig.②Ⓕ	BP4EY,-11 BP5EY,-11 BP6EY,-11 BP7EY	BPR4EY,-11 BPR5EY,-11 BPR6EY,-11 BPR7EY-11		
	Fig.②Ⓖ	BP5E BP6E	BPR4E,-11 BPR5E,-11 BPR6E,-11 BPR7E		
	Fig.④Ⓘ	BP5ET,-10 BP6ET BP7ET			
	Fig.⑤Ⓙ			BPR5EJ	
ϕ 14mm × 19.0mm Hex 16.0mm Fig.⑥Ⓒ		BCP4ES,-11 BCP5ES,-11 BCP6ES,-11 BCP7ES,-11		BCPR5ES,-11 BCPR6ES,-11 BCPR7ES,-11 BCPR9ES-11	
	Fig.⑧Ⓙ ISO	BCP5ET BCP6ET BCP7ET		BCPR5ET BCPR6ET BCPR7ET	
	Fig.⑥Ⓐ	BC6ES		BCR8ES	
	Fig.⑦Ⓒ ISO	BK5ES	BK5ESZ	BKR4ES-11 BKR5ES,-11 BKR6ES,-11 BKR7ES-11	

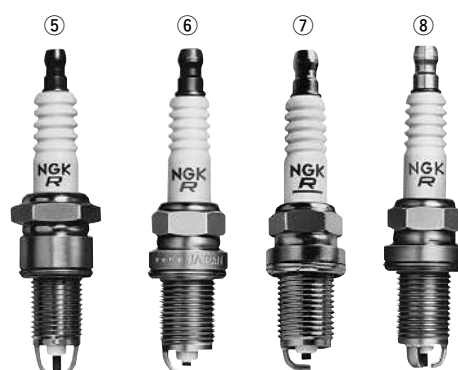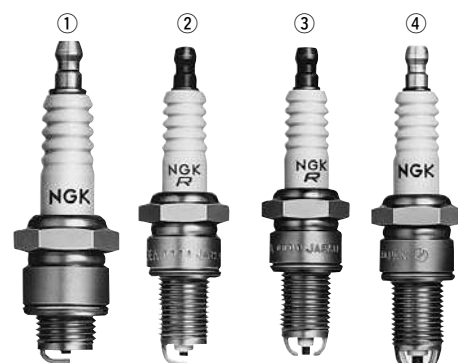






	NON-RESISTOR OHNE WIDERSTAND NON-RÉSISTANCE NO-RESISTOR ICKERESISTOR		RESISTOR MIT WIDERSTAND RÉSISTANCE RESISTOR RESISTOR	
ϕ 14mm \times 19.0mm Hex 16.0mm Fig. ①③			BCPR4EY,-11 BCPR5EY,-11 BCPR6EY,-11,-N-11 BCPR7EY,-11,-N-11	
	Fig. ②③ ISO		BKR4EY,-11 BKR5EY,-11 BKR5EYA,-11 BKR6EY,-11 BKR6EYA,-11 BKR7EY	
	Fig. ①④	BCP5E BCP6E,-11 BCP7E,-11	BCPR5E,-11 BCPR6E,-11 BCPR7E,-11	
	Fig. ②④ ISO	BK5E,-11 BK6E,-11	BKR4E,-11 BKR5E,-11,-N,-N-11 BKR5EZ BKR6E,-11-E,-N,-N-11 BKR6EZ BKR7E,-11,-N-11 BKR8E-11 FR6F-11DK FR6F-11K	
	Fig. ⑥⑦ ISO		BKR5EK BKR6EK	
	Fig. ⑥⑨ ISO		BKR5EKB-11 BKR6EKB-11	
			BKR5EKC BKR6EKC,-N-11 BKR6EKE BKR7EKC,-N,-N-11	
ϕ 14mm \times 26.5mm Hex 16.0mm Fig. ⑧④			LFR4A,-11 LFR4A-E LFR5A,-11 LFR6A,-11 LFR7A	
ϕ 14mm \times 11.2mm Conical seat Hex 16.0mm Fig. ③①			BR5FS BR6FS,-15	
	Fig. ③②	BP4FS BP5FS BP6FS BP7FS	BPR4FS,-11,-15 BPR5FS,-11,-15 BPR6FS	
	Fig. ③④	BP5F BP6F		
ϕ 14mm \times 17.5mm Conical seat Hex 16.0mm Fig. ④①			BR7EFS	
	Fig. ④⑤		BR6EF BR7EF	
	Fig. ④②	BP5EFS,-13 BP6EFS,-13 BP7EFS	BPR5EFS,-13 BPR6EFS,-13,-15 BPR7EFS-15	
	Fig. ④④	BP6EF	BPR6EF,-11,-13	
ϕ 14mm \times 25.0mm Conical seat Hex 16.0mm Fig. ⑦②			TR5A-13 TR5B-13 TR6B-10	
ϕ 14mm \times 11.2mm Hex 20.8mm Fig. ⑤①	B-4L B-6L B6LY (Fig. ⑤⑤)			

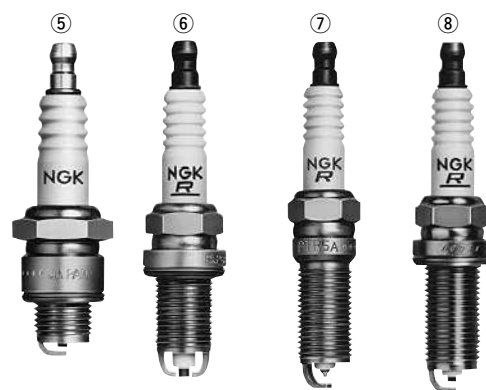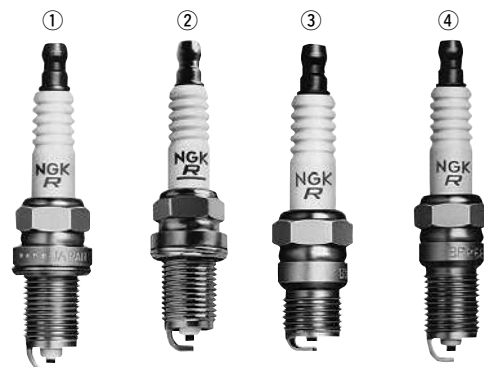





	NON-RESISTOR NON-RÉSISTANCE ICKERESISTOR	OHNE WIDERSTAND NO-RESISTOR	RESISTOR RÉSISTANCE RESISTOR	MIT WIDERSTAND RESISTOR
ϕ 14mm \times 12.7mm Hex 20.8mm Fig. ①(a)	B-2H B-4H,-10 B5HS B6HS,-10 B7HS,-10 B8HS,-10 B9HS B10HS		BR4HS BR5HS BR6HS,-10 BR7HS,-10 BR8HS,-10 BR9HS,-10 BZ7HS-10	
Fig. ①(b)	BP2HS BP4HS,-10 BP5HS,-10 BP6HS,-10 BP7HS,-10 BP8HS,-10,-15	BP-2H BP-4H BP6H BP7H	BPR2HS BPR4HS,-10 BPR5HS BPR6HS,-10 BPR7HS,-10 BPR8HS,-10	BPR4HSA BPR-4H BPR6HSA BPZ8H-N-10 BPZ8HS-10,-15
Fig. ①(c)	BP4HA			
Fig. ①(e)	B6HSA B8HSA		BR4HSA BR6HSA,-9 BR8HSA,-9	
ϕ 18mm \times 12.0mm Hex 20.8mm Fig. ⑤(f)	AB-2 AB-6 AB-7 AB-8			
ϕ 18mm \times 16.0mm Hex 25.4mm			R8102B-10	
ϕ 12mm \times 19.0mm Hex 18.0mm Fig. ⑥(h)	D6EA D7EA D8EA D9EA D10EA		DR7EA DR7EB DR8EA DR8EB DR9EA	
Fig. ⑥(i)	DP6EA-9 DP7EA-9 DP8EA-9 DP9EA-9		DPR5EA-9 DPR6EA-9 DPR6EB-9 DPR7EA-9 DPR8EA-9 DPR9EA-9	
Fig. ⑥(h)	J9A		JR8B JR9B JR10B	
Fig. ⑥(k)			JR8C JR9C	
ϕ 12mm \times 21.0mm Hex 18.0mm Fig. ⑦(j)	DP8Z		DPR7Z DPR8Z DPR9Z	
ϕ 12mm \times 19.0mm Hex 16.0mm Fig. ⑧(i)	DCP6E DCP7E		DCPR6E DCPR7E,-N DCPR8E,-N DCPR9E	KR6A-10 KR8C-G KR9C-G
Fig. ⑧(m)			DCPR8EKC	
ϕ 12mm \times 20.5mm Hex 16.0mm			KER7A-8DEG	
ϕ 12mm \times 26.5mm Hex 16.0mm Fig. ⑨(b)			LKR6C LKR6E LKR6F-10 LKR7E	
ϕ 12mm \times 25.0mm Hex 14.0mm			LNAR7A-9G	
ϕ 12mm \times 26.5mm Hex 14.0mm Fig. ⑨(b)			LZKAR6C-9 LZKAR7D-9,-9D LKAR8A-9,-9S	

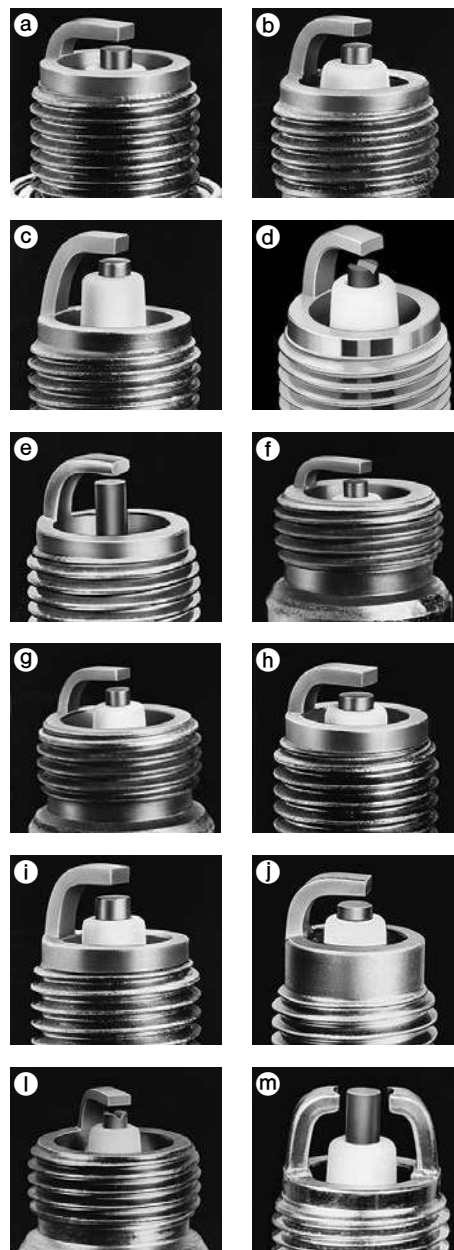

	NON-RESISTOR NON-RÉSISTANCE ICKERESISTOR	OHNE WIDERSTAND NO-RESISTOR	RESISTOR RÉSISTANCE RESISTOR	MIT WIDERSTAND RESISTOR
ϕ 12mm \times 12.7mm Hex 18.0mm Fig. ①a	D6HA D8HA		DR4HS DR5HS DR6HS DR8HS	
ϕ 10mm \times 12.7mm Hex 16.0mm Fig. ②a	C2H C5HSA C6HSA C7HSA C8HSA	C4HSB C5HSB	CR4HSA CR4HSB LR4C-E CR5HSA CR5HSB CR6HSA LR6E CR7HSA LR7D CR8HSA CMR8H LR8A LR8B	
ϕ 10mm \times 19.0mm Hex 16.0mm Fig. ③①	C7E C8E C9E		CR6E CR6EB CR7EK CR7EB CR8EK CR8EB CR9EK CR9EB CR10E	
 Fig. ③k			D CPR8E CPR6EA-9S CPR7EA-9	
ϕ 10mm \times 19.0mm Hex 16.0mm Fig. ④a	C8EH-9 C9EH-9		CR5EH-9 CR7EH-9 MR7C-9N MR7E-9 MR7F CR8EH-9 MR8C-9N MR8D-9 MR8E-9 MR8F CR9EH-9 MR9C-9N	
ϕ 10mm \times 19.0mm Hex 16.0mm Fig. ③b			CR7EKB CR7EKB CR8EKB CR8EKB CR9EKB CR9EKB CR10EK	
 Fig. ③i			CR7EKC	
ϕ 10mm \times 19.0mm Hex 14.0mm Fig. ⑤b			MAR9A-J MAR10A-J MAR8B-JDS MAR9B-JDS	
ϕ 10mm \times 26.5mm Hex 14.0mm Fig. ⑥k			LMAR6A-9 LMAR7A-9 LMAR8A-7,9,9S LMAR6C-9 LMAR7H-9DS LMAR8F-9 LMAR8G	
 Fig. ⑤b			LMAR9D-J	
ϕ 8mm \times 19.0mm Hex 13.0mm Fig. ⑤a			ER8EH, -N ER9EH, -N, -6N ER10EH	

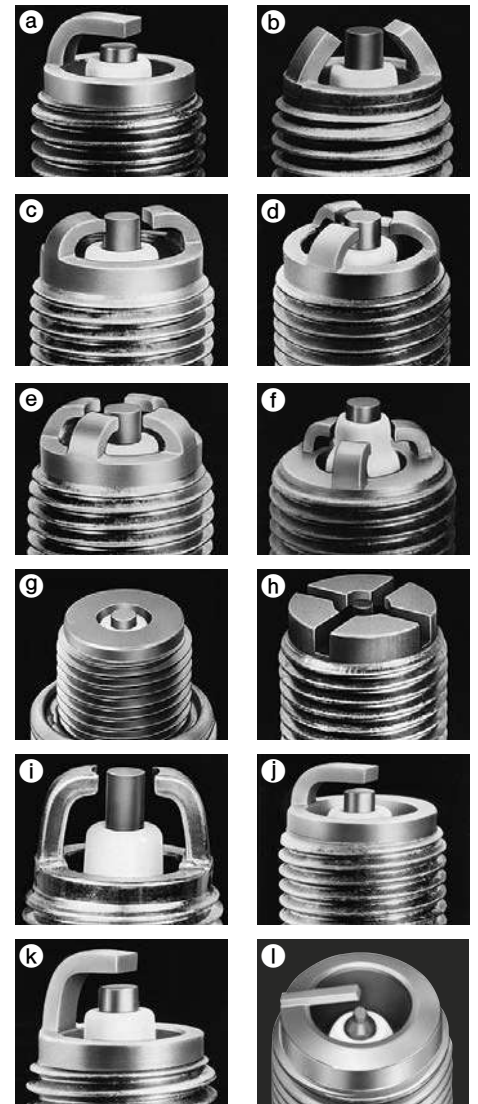


FOR ROTARY ENGINE FÜR WANKELMOTOR POUR MOTEUR ROTATIF PARA MOTOR ROTATIVO TÄNDSTIFT FOR WANKELMOTORER


	NON-RESISTOR NON-RÉSISTANCE ICKERESISTOR	OHNE WIDERSTAND NO-RESISTOR	RESISTOR RÉSISTANCE RESISTOR	MIT WIDERSTAND RESISTOR
ϕ 14mm \times 19.5mm Hex 20.8mm Fig. ⑥c	B7EM		BR8EM	
 Fig. ⑥d			BR7ET BR8ET BR9ET BR10ET	
 Fig. ⑥e			BR8EQ,-14 BR9EQ,-14	
ϕ 14mm \times 21.5mm Hex 20.8mm Fig. ⑧g			SD10A SD11A	
 Fig. ⑧h			BUR6EQ BUR7EQ BUR8EQ BUR9EQ BUR7EQP BUR9EQP	
ϕ 14mm \times 21.0mm Hex 20.8mm Fig. ⑨			RE6C-L RE7C-L RE8C-L	
ϕ 14mm \times 19.0mm Hex 20.8mm Fig. ⑩①			RE9B-T	



SEMI SURFACE DISCHARGE TYPES AND SUPPLEMENTARY GAP TYPE

HALBGLEITFUNKENTYPEN UND ZUSÄTZLICHER ABSTANDSTYP
TYPE À DÉCHARGE SEMI-SURFACIQUE ET TYPE À ÉCARTEMENT SUPPLÉMENTAIRE
TIPO DE DESCARGA DE MEDIA SUPERFICIE Y TIPO DE GALGA SUPLEMENTARIA
STIFT MED SEMI-YTGNISTGAP OCH STIFT AV SUPPLEMENTÄR TYP

		NON-RESISTOR OHNE WIDERSTAND NON-RÉSISTANCE NO-RESISTOR ICKERESISTOR	RESISTOR RÉSISTANCE RESISTOR
ϕ 14mm × 12.7mm Hex 20.8mm Fig.①②		BU8H	BUZ8H
ϕ 14mm × 19.0mm Hex 20.8mm Fig.②③			BUR5EA-11 BUR6EA-11 BUR7EA-11
ϕ 14mm × 19.0mm Hex 20.8mm Fig.②④			BUR4EB-11 BUR5EB-11 BUR6EB-11 BUR7EB-11
	Fig.②⑤		BUR5ET,-10 BUR6ET
ϕ 14mm × 19.0mm Hex 20.8mm Fig.③⑥			BPR6EK-A
	Fig.③⑦		BPR5EKU
ϕ 14mm × 17.5mm Conical seat Hex 16.0mm Fig.④⑧		BU6EFSZ	BUR6EFSZ
ϕ 14mm × 19.0mm Hex 16.0mm Fig.⑥⑨ ISO			BKUR6EK,-9 BKUR7EK
	Fig.⑤④ ISO		BKUR5ET,-10 BKUR5ETZ-10 BKUR6ET,-10 BKUR6ETB BKUR7ET
	Fig.⑥⑦ ISO	BK7EKU	BKR5EKU BKR6EKU BKR7EKU
	Fig.⑥⑧ ISO		BKR6EKUE BKR6EKUB
ϕ 14mm × 22.0mm Hex 16.0mm Fig.⑦⑩			BKR5EKUC BKR6EKUC
ϕ 14mm × 19.0mm Hex 16.0mm Fig.⑥⑪			BKR6EQUA

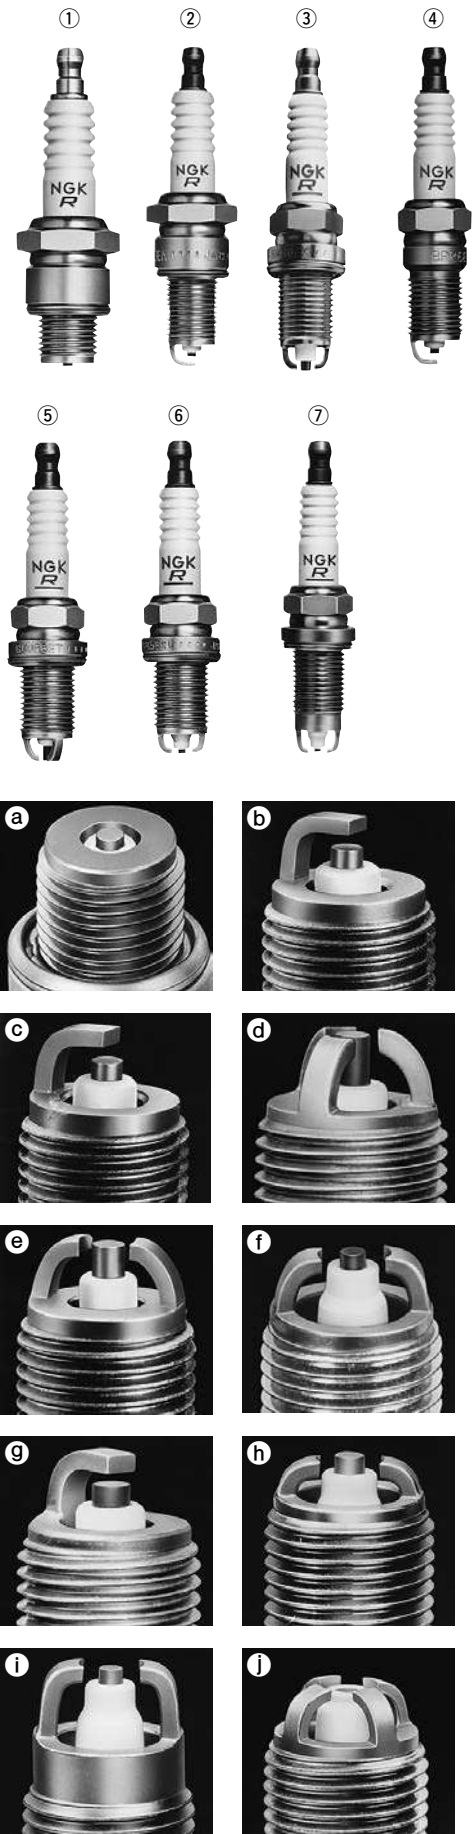


PROJECTED GAP TYPES


ZÜNDKERZEN MIT VORSRINGENDER FUNKENSTRECK

TYPE A ÉCARTEMENT EN SAILLIE

TIPOS DE ABERTURA DE CHISPA PROYECTADA

STIFT MED FÖRLÅNGDA ELEKTRODER

	NON-RESISTOR NON-RÉSISTANCE ICKERESISTOR	OHNE WIDERSTAND NO-RESISTOR	RESISTOR RÉSISTANCE RESISTOR	MIT WIDERSTAND RESISTOR
ϕ 14mm \times 19.0mm Hex 20.8mm Fig. ①②	BE529Y-11		BRE527Y-11 BRE529Y,-11	
Fig. ②③			ZGR4A ZGR5A	
ϕ 14mm \times 20.5mm Hex 20.8mm Fig. ②④			ZGR5B,-11 ZGR6B-11	
ϕ 14mm \times 22.0mm Hex 20.8mm Fig. ②⑤			ZGR5C	
ϕ 14mm \times 19.0mm Hex 16.0mm Fig. ③⑥	ZF6A-11		ZFR5A-11 ZFR6A-11	
Fig. ④⑦ ISO			ZFR4F-11 ZFR5F,-11 ZFR5J-11 ZFR6F-11,G ZFR6J-11 ZFR7F-11 ZFR7J-11	
Fig. ③⑧			BCRE527Y	
ϕ 14mm \times 20.5mm Hex 16.0mm Fig. ③⑨			ZFR6K-9E,-11S	
			ZFR5G ZFR6G	
ϕ 14mm \times 22.5mm Hex 16.0mm Fig. ③⑩			ZFR4E-11 ZFR5E-11 ZFR6E-11	
Fig. ③⑪			ZFR5D-11	
ϕ 14mm \times 25.0mm Conical seat Hex 16.0mm Fig. ⑤⑫			LZTR4A-11 LZTR5A-13	
ϕ 12mm \times 19.0mm Hex 16.0mm			ZKR7A-10	
ϕ 12mm \times 21.5mm Hex 16.0mm			ZKER6A-10DEG,-10EG	
ϕ 12mm \times 26.5mm Hex 16.0mm			LZKR6B-10E	
ϕ 12mm \times 26.5mm Hex 14.0mm			LZKAR6C-11	
ϕ 12mm \times 26.3mm Bi-Hex 14.0mm			ZKBR7A-HTU	

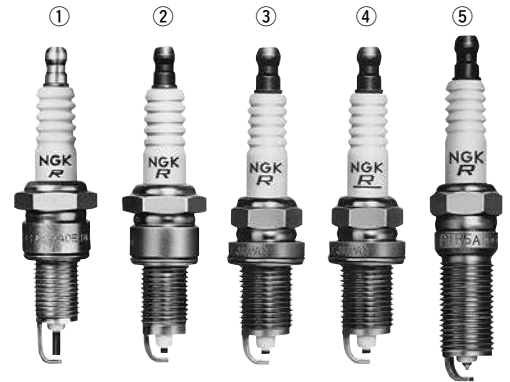

SLANT GROUND ELECTRODE TYPE

SCHRÄGER MASSENELEKTRODENTYP

TYPE À ÉLECTRODE DE MASSE À INCLINAISON


TIPO DE ELECTRODO DE MASA INCLINADO


STIFT MED VINKLAD SIDOELEKTROD


ϕ 14mm \times 12.7mm Hex 20.8mm Fig. ⑥⑦	B7HCS B8HCS B9HCS	BR8HCS-10
ϕ 14mm \times 19.0mm Hex 20.8mm Fig. ⑦⑧	B7ECS B8ECS B9ECS	BR8ECS BR9ECS BR10ECS
Fig. ⑧⑨		BR8ECM BR9ECM BR10ECM






PLATINUM, IRIIDIUM TIPPED TYPES **TYPEN MIT PLATINELEKTRODENSPITZE, IRIIDIUMSPITZE** **TYPE[S] A EXTREMITÉ EN PLATINE, IRIIDIUM** **TIPOS CON PUNTA DE PLATINO, IRIIDIO** **STIFT MED MITTELEKTRODÄNDA AV PLATINA OCH IRIIDIUM**


	RESISTOR RÉSISTANCE RESISTOR	MIT WIDERSTAND RESISTOR
ϕ 14mm × 19.0mm Hex 20.8mm Fig.①①	PGR5A,-11 PGR5C-11 BPR5EP-11,-13 PGR6A,-11 PGR6C-11 BPR6EP-8 PGR7A 125CX 126CX IGR7A	
ϕ 14mm × 19.0mm Hex 20.8mm Fig.①⑧	IGR5C13 GR7CI-8	
ϕ 14mm × 19.0mm Hex 16.0mm Fig.②②	PFR5A-11 PFR5K-11 BCPR5EP-8,-11,-13 PFR6A-11 PFR6H-10 PFR6K-11 BCPR6EP-8,N-8,-11,-N-11,-13 PFR7A-11 PFR7H-10	
Fig.③⑧ ISO	FR4AP-10,-11 FR4BP-11 FR5AP-10,-11 FR5BP-11 FR5AP-11E FR6AP-10,-11 FR6BP-11 FR7AP-11 115CX 116CX 136CX FR5EI-13 PFR5B-9,-11,-11B PFR5C-11 PFR6B,-9,-11,-11B,-11C PFR6E-10 PFR7B,-9,-11 PFR8B,-9 PFR4G-11 PFR5G-11,-13E PFR5J-11 PFR6G,-9,-11,-13,-13E PFR6H-10 PFR6J,-11 PFR7G,-9,-11 PFR7S11EG PFR5L-11 PFR5N-11,8DS PFR5P-11 PFR6L-11,-13 PFR6N-11 PFR6P-11 PFR6Q PFR7N-D PFR7Q PFR5R-11 BKR5EP-11 BKR6EP-8,-11,-13,-N-8	
	Fig.④③ ISO BKR6EKPA	
	Fig.④④ ISO BKR5EKUP	
	Fig.④⑤ ISO BKR5EKP-11,-13 BKR6EKP-11	
	Fig.④⑥ ISO BKR5EQUPA BKR6EQUP BKR6EQUPA	
	Fig.③⑦ ISO PFR6M PFR6X-11 PFR7M PFR7S8EG	
	Fig.③⑧ ISO PZFR5B PZFR5F,-11 IZFR5B IZFR5F11 IZFR5G IZFR5L11 PZFR6B PZFR6F,-11 IZFR6B IZFR6F11 SIFR6B7G T6728R T6728U-G035	
	Fig.③⑧ ISO IFR5A11,-8N IFR5D10 IFR5E11 IFR6A11 IFR6C IFR6D10 IFR6E11 IFR6AD7DG IFR6AE11S IFR7F-D IFR7B4D IFR8AF4D IFR8AG8 IFR5G11 IFR5J11 IFR5N10 IFR5T-8N,11 IFR6J11 IFR6S IFR6T11 IFR7X7G	
	Fig.③ PZFR6H IZFR6J IZFR6N-E IZFR6Q	
	Fig.③⑨ PFR6W-TG	
	Fig.③⑩ DIFR5E11 DF6A-13B DIFR6D11D DIFR6D13 ZFR5LP-13G IZFER7A4D 11G-55	
ϕ 14mm × 21.5mm Hex 16.0mm	PZFR6R,8EG	
ϕ 14mm × 22.0mm Hex 16.0mm Fig.⑩⑩ ISO	PZFR5C PZFR5D-11 IZFR5C IZFR7E-D	
ϕ 14mm × 22.5mm Hex 16.0mm	135CX	
ϕ 14mm × 25.0mm conical seat Hex 16.0mm Fig.⑥⑧	PTR5A-13 ILTR5D	

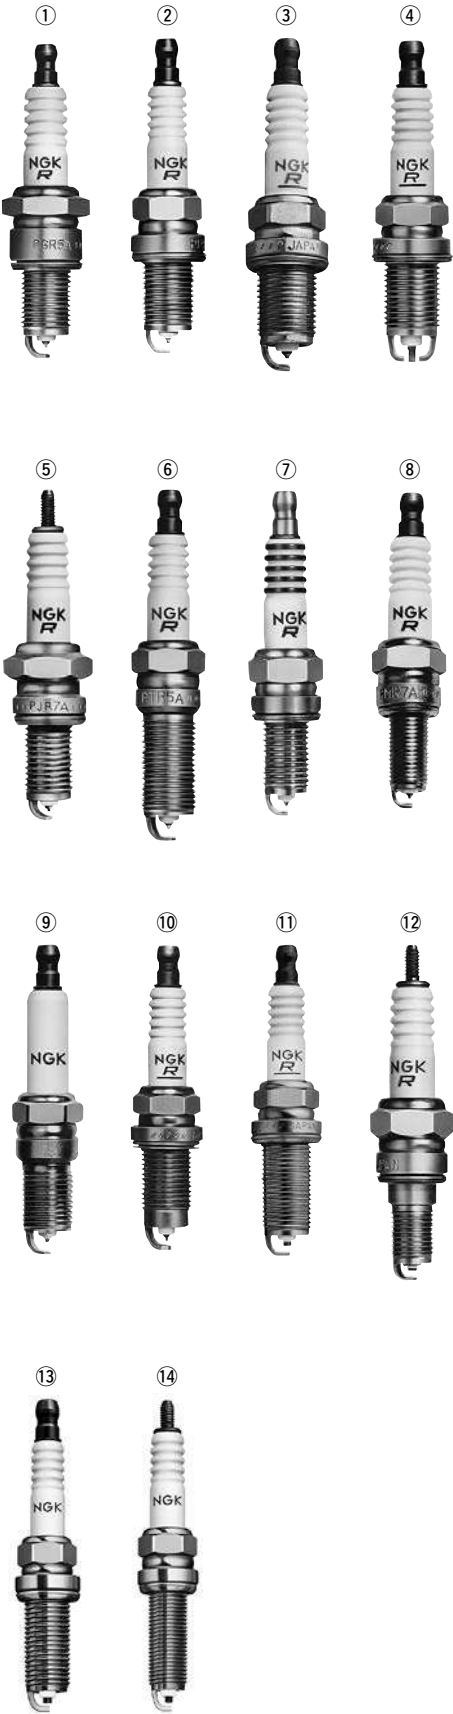

	RESISTOR MIT WIDERSTAND RÉSISTANCE RESISTOR RESISTOR
ϕ 14mm \times 17.5mm conical seat Hex 16.0mm Fig. ⑨①	PTR4B-15 PTR5C-13 ITR4A15 ITR6F13
ϕ 14mm \times 17.5mm conical seat Hex 16.0mm Fig. ③⑧ Fig. ⑨⑨	ITR5H13 PTR5D-10,-13 TR5AI-13 TR5AP-13 ITR6G9 PTR6D-13,-13G ITR7J9D PZTR5A-15
ϕ 14mm \times 20.5mm Hex 16.0mm Fig. ③⑫	IZFR6K11,11E,13 IZFR6K-11S,IZFR6K11NS PZFR7G-G
ϕ 14mm \times 21.5mm Hex 16.0mm Fig. ⑩	PZFR5N-11T
ϕ 14mm \times 22.0mm Hex 16.0mm Fig.	PZFR6J-11
ϕ 14mm \times 26.5mm Hex 16.0mm Fig. ⑪	PLFR4A-11 PLFR5A-9,-11 ILFR5T11 ILFR5B11 DILFR5A11 DILFR5C11 DILFR5E11 DF5B-8A DILFR5L11 ILZFR5E8D LZFR5CI-11 PLFR6A-9,-11 ILFR6T11 ILFR6K8 ILFR6G,-E SILFR6A11 DILFR6D11D DILFR6L11 PLFR7A-9 DILFR7K9G ILFER7A8EG SILZFR7A9G PLZFR6A-11S ILZFR6A11 DILFR7B10G 155CX 156CX
ϕ 14mm \times 28.0mm Hex 16.0mm Fig. ⑪	LZFR5BI-11 LZFR5DI-11 LZFR6AI
ϕ 14mm \times 29.5mm Hex 16.0mm Fig. ⑪①	LZFR5AQP
ϕ 14mm \times 25.0mm conical seat Hex 16.0mm	PLZTR4A-13 PLZTR5A-13 ILTR5A-13G ILTR5P11D LTR5BI-13 LTR6AP-11 LTR6A-8G,-13G ILTR6J13 ILTR6M9G LTR6AI-8 LTR6BI-13 LTR6DI-8 LTR6DP13 ILTR7E9D ILTR7J8 ILTR7N8 ILTR7Q9 LTR7CP13
ϕ 12mm \times 19.0mm Hex 18.0mm Fig. ⑤⑧	PJR6A PJR7A IJR7A9 PJR8A
ϕ 12mm \times 19.0mm Hex 16.0mm	IKR6G8 IKR7H8 IZKR8C10D SIKR8B7G IKR9H8 IKR9J8 147CX
ϕ 12mm \times 19.0mm Hex 16.0mm Fig. ⑦①	PKR7A KR7AI IKR6G11 PKR9B KR8AI KR9CI IKR9F8
ϕ 12mm \times 19.0mm Hex 16.0mm Fig. ⑦⑥	DCPR8EKP
ϕ 12mm \times 20.5mm Hex 16.0mm	IKER7A8EGS ZKR7BI-10 PKER7A8EGS PKER7A8DES
ϕ 12mm \times 21.5mm Hex 16.0mm	PZKER7B8EGS
ϕ 12mm \times 22.0mm Hex 16.0mm	IZKR7A
ϕ 12mm \times 26.5mm Hex 16.0mm	ILKR6F11 ILZKR6F11 SILKR6C10E SILKR6D10G ILKR7D8 ILKR7J8 ILKR7K8 ILKR7L8G ILZKR7D8 ILZKR7E10DG LKR7FI-8 SILKR7C8DE SILZKR7E11 SILZKR7E8EG SILZKR7E9 SILZKR7E9G SILZKR7G8DE ILKR8M5D ILKR8P8 SILZKR8E8D SILZKR8E8G ILKR9G8 ILKR9H8 HKS-G40XL
Fig. ⑩	DILKR7E11
Fig.	
ϕ 12mm \times 28.0mm Hex 16.0mm	DILZKR7B11G ILZKR7G7G
ϕ 12mm \times 29.0mm Hex 16.0mm	SILZKKER8A8E
ϕ 12mm \times 25.0mm Hex 14.0mm	SILZNAR6D9 SILNAR7B7 SILNAR7C7DG ILNAR8B7G ILZNAR8B7G SILNAR8A7
ϕ 12mm \times 26.5mm Hex 14.0mm	ILKAR7L11 ILKAR7L11D ILKAR7M10 ILZKAR7D11 LKAR7CI-8 ILKAR8H6 LKAR8CI-8 SILKAR8C6DG SILKAR8C6DS SILKAR8D6 SILKAR8E4DG SILKAR8F8 SILZKAR8D4D SILZKFR8B7S SILZNAR8C7H HKS-M50HL
Fig. ⑬④	LKAR8AP7JD LKAR8AP7JDS
Fig. ⑬⑨	DILKAR7B8 DILKAR7G11DS DILKAR7H11GS DILKAR7M8 DILZKAR7B11 DILKAR8J9G DILKAR8K8D DILKAR8L8D
Fig. ⑬	




	RESISTOR MIT WIDERSTAND RÉSISTANCE RESISTOR RESISTOR
ϕ 12mm \times 27.0mm Hex 14.0mm	SILZKFR8C7S SILZKFR8D7S
ϕ 12mm \times 27.5mm Hex 14.0mm	SILZKFR8E7S
ϕ 12mm \times 28.0mm Hex 14.0mm Fig.(K)	DILZKAR7C11S ILZKAR7E11S ILZKAR8F8S ILZKAR8G8 ILZKAR8H8S ILZKAR8J8SY ILZKAR8A7G SILZKAR8F7S
ϕ 12mm \times 28.5mm Hex 14.0mm Fig.(N)	DILKA7E9HS
ϕ 10mm \times 19.0mm Hex 16.0mm Fig.(8)(1)	CR9EBI-9
Fig.(8)	MR8CI-8 SIMR7B9DS
Fig.(8)(C)	MR8BI-8
ϕ 10mm \times 19.0mm Hex 16.0mm Fig.(12)	
ϕ 10mm \times 22.0mm Hex 16.0mm	MR8BP8HJS
ϕ 10mm \times 26.5mm Hex 14.0mm Fig.(14)	ILMAR7B8 LMAR7CI-8 SILMAR7D9DS ILMAR8C9D LMAR8AI-8E LMAR8BI-9 SILMAR8C9 SILMFR8A8G SILMAR9B9
ϕ 10mm \times 26.5mm Hex 14.0mm Fig.(d)	LMAR9AP8JS
ϕ 12mm \times 26.5mm Bi-Hex 14.0mm	ILZKBR7B8DG PLZKBR7B8DG SILZKBR8B8HG SILKGR9A7EG
ϕ 12mm \times 27.5mm Bi-Hex 14.0mm	SILZKBR8D8S SILZKBR8E8S SILZKGR8A8S SILZKGR8B8S
ϕ 12mm \times 28.0mm Bi-Hex 14.0mm	SILZKG8D7E
ϕ 12mm \times 28.5mm Bi-Hex 14.0mm	SILZKBR8F8S SILZKGR8C8S



COMPACT TYPES

KOMPAKT STIFT
TIPOS COMPACTOS

TYPES COMPACTES
KOMPACTE TYPEN

	NON-RESISTOR NON-RÉSISTANCE ICKERESISTOR	OHNE WIDERSTAND NO-RESISTOR	RESISTOR RÉSISTANCE RESISTOR	MIT WIDERSTAND RESISTOR
ϕ 18mm × 16mm Hex 25.4mm	R8160B-10			
ϕ 14mm × 9.5mm Hex 19.0mm Fig.①a	BM4A BM6A BM7A	B2-LM * B4-LM * BM6 * BM7 * * Hex.20.8mm	BMR2A,-10 BMR4A BMR6A BMR7A	BR2-LM * BR4-LM * * Hex.20.8mm
Fig.①b	BPM4A BPM6A,-10 BPM7A		BPMR4A,-10 BPMR6A,-10 BPMR7A,-9	
ϕ 14mm × 12.7mm Hex 20.8mm Fig.②a	BL-6H			
ϕ 14mm × 7.8mm Conical seat Hex 16.0mm Fig.③a	BM6F BM7F	BM6FY	BMR6F	
Fig.③b	BPM6F BPM7F		BPMR6F	
ϕ 10mm × 8.6mm Hex 14.0mm Fig.④a	CM-6			
ϕ 10mm × 9.5mm Hex 16.0mm Fig.⑧a			CMR6A CMR7A	
ϕ 10mm × 12.7mm Hex 16.0mm Fig.⑧e			CMR5H CMR6H CMR7H	
ϕ 14mm × 9.5mm Hex 19.0mm Fig.①c	BPM6Y BPM7Y BPM8Y		BPMR6Y BPMR7Y BPMR8Y	



FARM EQUIPMENT TYPES


LANDMASCHINEN TYPEN TYPES MACHINES AGRICOLES
TIPOS MÁQUINAS AGRÍCOLAS FOR JORDBRUKS-MASKINER

PF1/2" × 22.5mm Hex 23.8mm Fig.⑤d	G-27 G-2Z
---	----------------------------

SURFACE DISCHARGE TYPES


GLEITFUNKENTYPEN TYPE À DÉCHARGE SUPERFICIELLE
TIPO DESCARGA EN SUPERFICIE TÅNDSTIFT MED YTGNISTGAP

ϕ 14mm × 12.7mm Hex 20.8mm Fig.⑥f	BUHX(Series gap) BUHXW-1(Series gap)	
	BUH	
	BUHW BUHW-2	BUZHW BUZHW-2
ϕ 14mm × 19.0mm Hex 20.8mm Fig.⑦f	BUE	

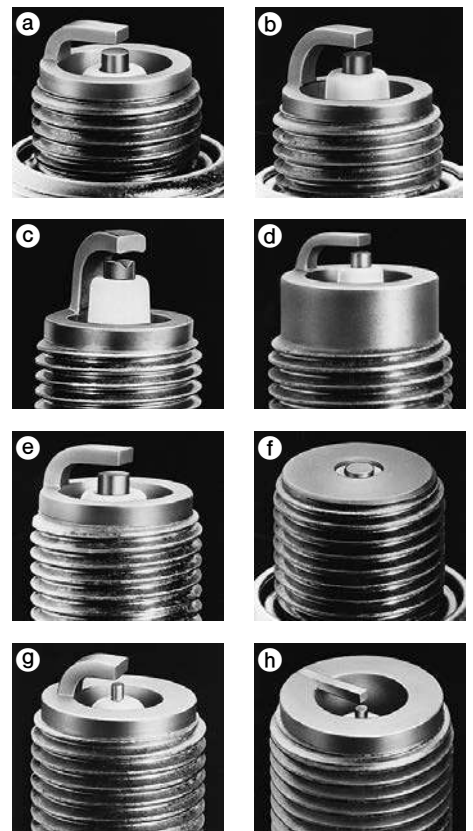

RACING TYPES

RENN-TYPEN TYPES COURS
TIPOS DE CARRERAS RACERSTIFT


	Nickel electrode Nickel Elektrode Electrodo de níquel Electrodo de níquel Nickel elektrod	Precious metal electrode Elektrode mit sonde-redel metall Electrode en metal précieux Electrodo de metal precioso Ädelmetall elektrod	Platinum electrode Platinel Elektrode Electrodo de platino Electrodo de platino Platina elektrod
ϕ 14mm × 19.0mm Hex 20.8mm	(Fig.⑨g) B8EGV BR8EG* B9EGV BR9EG* B10EGP BR10EG* B11EG	(Fig.⑨g) B8EGV B85EGV B9EGV B95EGV B10EGV B105EGV B11EGV	(Fig.⑨h) B10EGP
*Resistor Type			




IX TYPES

IX TYPEN
TIPOS IX

TYPES IX
IX-STIFT


	RESISTOR MIT WIDERSTAND RÉSISTANCE RESISTOR RESISTOR			
ϕ 18mm \times 10.9mm Hex 20.8mm Fig. ①Ⓐ	WR5IX			
ϕ 14mm \times 19.0mm Hex 20.8mm Fig. ②Ⓑ		BPR5EIX , -11 BPR6EIX , -11 BPR7EIX BPR8EIX BPR9EIX BPR10EIX	GR4IX GR5IX	
	Fig. ②Ⓒ	BR7EIX BR8EIX BR9EIX BR10EIX		
	Fig. ②Ⓓ	BR8ECSIX BR9ECSIX, -5		
	Fig. ③Ⓓ	BR8ECMIX BR9ECMIX BR10ECMIX		
ϕ 14mm \times 12.7mm Hex 20.8mm Fig. ④Ⓑ		BPR6HIX BPR7HIX BPR8HIX		
	Fig. ④Ⓒ	BR6HIX BR7HIX BR8HIX BR9HIX BR10HIX		
ϕ 14mm \times 9.5mm Hex 20.8mm Fig. ⑤Ⓐ		XR4IX XR5IX XR45IX		
ϕ 14mm \times 19.0mm Hex 16.0mm Fig. ⑥Ⓑ		BCPR7EDIX		
	Fig. ⑦Ⓑ	BCPR5EIX, -11 BCPR6EIX, -11 BCPR7EIX, -11		
	Fig. ⑧Ⓑ	BKR4EIX BKR5EIX, -11 BKR6EIX, -11 BKR7EIX, -11 BKR8EIX BKR9EIX		
	Fig. ⑧Ⓔ	ZFR5FIX-11 ZFR6FIX-11		
ϕ 14mm \times 26.5mm Hex 16.0mm Fig. ⑨Ⓑ		LFR5AIX-11 LFR6AIX-11 LFR7AIX	LKR6AIX LKR7AIX	LKR6AIX-P LKR6CIX
ϕ 14mm \times 17.5mm Conical seat Hex 16.0mm Fig. ⑩Ⓑ		BPR6EFIX-10, -15		
	Fig. ⑩Ⓐ	TR4IX TR5IX TR6IX TR7IX TR8IX	TR55IX TR65IX TR75IX TR85IX	
ϕ 14mm \times 20.5mm Conical seat Hex 16.0mm Fig. ⑪Ⓔ		TR5-1IX	TR45-1IX TR55-1IX	
ϕ 14mm \times 11.2mm Conical seat Hex 16.0mm Fig. ⑫Ⓒ		YR5IX	YR55IX	
	Fig. ⑫Ⓒ	BR6FIX		
	Fig. ⑫Ⓐ	UR4IX UR5IX UR6IX	UR45IX UR55IX	
ϕ 14mm \times 25.0mm Conical seat Hex 16.0mm Fig. ⑬Ⓑ		LTR5IX-11 LTR6IX-11 LTR7IX-11		
	Fig. ⑬Ⓔ	LZTR4AIX-11 LZTR5AIX-13 LZTR6AIX-13 LZTR7AIX-13		


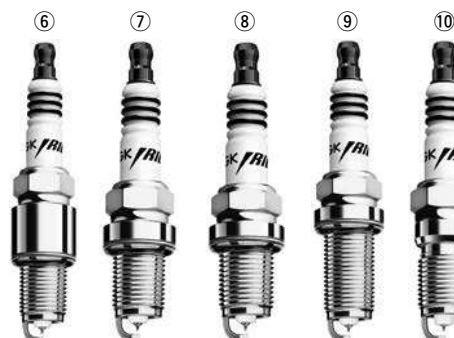


IX TYPES

IX TYPEN
TIPOS IX

TYPES IX
IX-STIFT



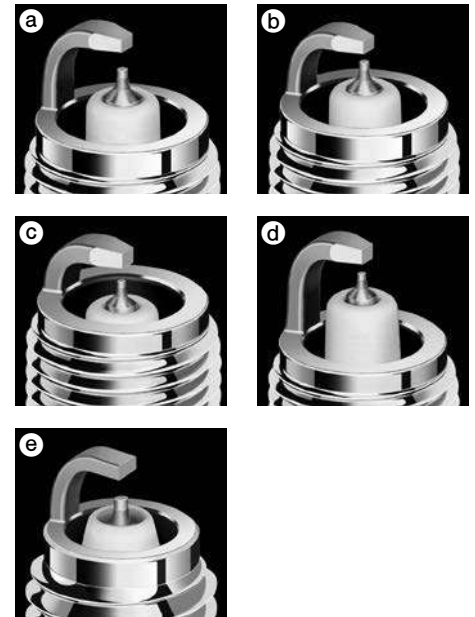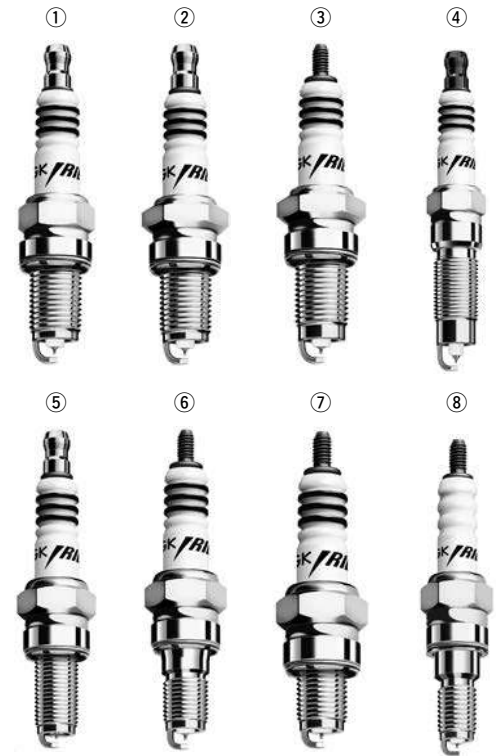








		RESISTOR RÉSISTANCE RESISTOR	MIT WIDERSTAND RESISTOR
ϕ 12mm × 19.0mm Hex 16.0mm Fig. ① ①		DCPR6EIX DCPR7EIX DCPR8EIX DCPR9EIX	
	Fig. ① ②	DCR7EIX DCR8EIX DCR9EIX	
ϕ 12mm × 19.0mm Hex 18.0mm Fig. ② ①		DPR7EIX-9 DPR8EIX-9 DPR9EIX-9	
	Fig. ② ②	DR7EIX DR8EIX DR9EIX	
ϕ 12mm × 21.0mm Hex 18.0mm Fig. ③ ①		DPR8ZIX	
ϕ 12mm × 26.5mm Conical seat Hex 14.0mm Fig. ④ ①		ZNAR7AIX ZNAR6AIX-11	
ϕ 12mm × 26.5mm Hex 14.0mm		LZKR6AIX	
ϕ 10mm × 19.0mm Hex 16.0mm Fig. ⑤ ①		CPR6EAIX-9S CPR7EAIX-9 CPR9EAIX-9	
	Fig. ⑤ ③	CR7EIX CR8EIX CR9EIX CR10EIX	
	Fig. ⑥ ②	CR8EHIX-9 CR9EHIX-9	
ϕ 10mm × 12.7mm Hex 16.0mm Fig. ⑦ ②		CR5HIX CR6HIX CR7HIX CR8HIX CR9HIX	
ϕ 8mm × 19.0mm Hex 13.0mm Fig. ⑧ ③		ER8EHIX ER9EHIX	





IGNITION
PARTS



          											
ARCTIC CAT											
Kitty Cat 60		60	1	1992-1999		0,7	BR6HS	3922	Q209	BR6HIX	3419
AC 120 SnoPro		120	1	2007-2009	4stroke	0,9	BPR6ES	4852		BPR6EIX	6637
AC 120 SnoPro		120	1	2010-2013	4stroke	0,8	BPR4ES	7222			
F 120		120	1	2006-		0,9	BPR6ES	4852		BPR6EIX	6637
Z 120		120	1	2000-2001		0,9	BPR6ES	4852		BPR6EIX	6637
Z 120 Sno-Pro		120	1	2001-		0,9	BPR6ES	4852		BPR6EIX	6637
ZR 120		120	1	2002-2005		0,9	BPR6ES	4852		BPR6EIX	6637
ZR 120		120	1	2014-2015	4stroke	0,8	BPR4ES	7222			
Bearcat 340		340	2	1995-1997		0,7	BR9ES	5722	Q208	BR9EIX	3981
Bearcat 340		340	2	1998-2000		0,7	BR9EYA	7548		BR9EIX	3981
Cheetah 340		340	2	1994-		0,7	BR9ES	5722	Q208	BR9EIX	3981
JAG 340		340	2	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
JAG 340 Deluxe		340	2	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Lynx 340		340	2	1991-1992		0,7	BR9ES	5722	Q208	BR9EIX	3981
Lynx 340		340	2	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Lynx 340 Deluxe		340	2	1991-1992		0,7	BR9ES	5722	Q208	BR9EIX	3981
Lynx 340 Deluxe		340	2	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Lynx 340 Mountain Cat		340	2	1992-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Lynx 340 Mountain Cat		340	2	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Panther 340		340	2	1998-2000		0,7	BR9EYA	7548		BR9EIX	3981
Puma 340		340	2	1994-1997		0,7	BR9ES	5722	Q208	BR9EIX	3981
Puma 340 2-up		340	2	1994-1997		0,7	BR9ES	5722	Q208	BR9EIX	3981
Puma 340 Deluxe		340	2	1994-1997		0,7	BR9ES	5722	Q208	BR9EIX	3981
Panther 370		370	2	2001-		0,7	BR9EYA	7548		BR9EIX	3981
Panther 370		370	2	2007-2008	2stroke	0,7	BR9EYA	7548		BR9EIX	3981
Panther 370 R		370	2	2003-2006	2stroke	0,7	BR9EYA	7548		BR9EIX	3981
Z 370		370	2	1999-2007		0,7	BR9EYA	7548		BR9EIX	3981
Z 370 ES		370	2	2000-2002		0,7	BR9EYA	7548		BR9EIX	3981
Z 370 ESR		370	2	2003-		0,7	BR9EYA	7548		BR9EIX	3981
Z 370 LX		370	2	2004-2007		0,7	BR9EYA	7548		BR9EIX	3981
ZR 400		400		1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Bearcat 440		440	2	1995-1997		0,7	BR9ES	5722	Q208	BR9EIX	3981
Bearcat 440		440	2	1998-		0,7	BR9EYA	7548		BR9EIX	3981
Bearcat 440 I		440	2	1999-2000		0,7	BR9EYA	7548		BR9EIX	3981
Bearcat 440 II		440	2	1999-2000		0,7	BR9EYA	7548		BR9EIX	3981
Cheetah 440		440	2	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Cheetah 440 1-Speed		440	2	1994-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Cheetah 440 2-Speed		440	2	1994-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Cheetah 440 Touring		440	2	1992-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Cougar 440		440	2	1992-1994		0,7	BR9ES	5722	Q208	BR9EIX	3981
Cougar 440 2-Up		440	2	1992-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Cougar 440 Mountain Cat		440	2	1993-1994		0,7	BR9ES	5722	Q208	BR9EIX	3981
Pantera 440		440	2	1991-1992		0,7	BR9ES	5722	Q208	BR9EIX	3981
Panther 440		440	2	1991-1993		0,7	BR9ES	5722	Q208	BR9EIX	3981
Panther 440		440	2	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Panther 440		440	2	1998-2002		0,7	BR9EYA	7548		BR9EIX	3981
Panther 440 Deluxe		440	2	1991-1996		0,7	BR9ES	5722	Q208	BR9EIX	3981
Panther 440 ESR		440	2	2001-		0,7	BR9EYA	7548		BR9EIX	3981
Panther 440 LC		440	2	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Panther 440 Rental		440	2	1995-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Prowler 440		440	2	1990-1992		0,7	BR9ES	5722	Q208	BR9EIX	3981
Prowler 2-Up 440		440	2	1991-1992		0,7	BR9ES	5722	Q208	BR9EIX	3981

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
ARCTIC CAT											
Prowler Mountain Cat 440		440	2	1991-1992		0,7	BR9ES	5722	Q208	BR9EIX	3981
Prowler Special 440		440	2	1992-		0,7	BR9ES	5722	Q208	BR9EIX	3981
AC 440 Sno-Pro		440	2	2003-2006		0,7	BR9EYA	7548		BR9EIX	3981
AC 440 Sno-Pro Modified Race Sled		440	2	2005-2006		0,7	BR9EYA	7548		BR9EIX	3981
JAG 440		440	2	1991-1996		0,7	BR9ES	5722	Q208	BR9EIX	3981
JAG 440		440	2	1998-1999		0,7	BR9EYA	7548		BR9EIX	3981
JAG 440 AFS LT		440	2	1991-1993	1 Speed	0,7	BR9ES	5722	Q208	BR9EIX	3981
JAG 440 AFS LT		440	2	1991-1993	2 Speed	0,7	BR9ES	5722	Q208	BR9EIX	3981
JAG 440 DELUXE		440	2	1991-1996		0,7	BR9ES	5722	Q208	BR9EIX	3981
JAG 440 DELUXE		440	2	1998-1999		0,7	BR9EYA	7548		BR9EIX	3981
JAG 440 Liquid		440	2	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
JAG 440 Special		440	2	1991-1992		0,7	BR9ES	5722	Q208	BR9EIX	3981
JAG 440 Z		440	2	1993-1994		0,7	BR9ES	5722	Q208	BR9EIX	3981
Super JAG 440		440	2	1992-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Z 440		440	2	1995-1997		0,7	BR9ES	5722	Q208	BR9EIX	3981
Z 440		440	2	1998-2002		0,7	BR9EYA	7548		BR9EIX	3981
Z 440 ES		440	2	2000-2002		0,7	BR9EYA	7548		BR9EIX	3981
Z 440 ESR		440	2	2003-		0,7	BR9EYA	7548		BR9EIX	3981
Z 440 LX		440	2	2004-2006		0,7	BR9EYA	7548		BR9EIX	3981
Z 440 Sno-Pro		440	2	2000-2003		0,7	BR9EYA	7548		BR9EIX	3981
ZL 440		440	2	1996-1997		0,7	BR9ES	5722	Q208	BR9EIX	3981
ZL 440		440	2	1998-2000		0,7	BR9EYA	7548		BR9EIX	3981
ZR 440		440	2	1993-1997		0,7	BR9ES	5722	Q208	BR9EIX	3981
ZR 440		440	2	1998-		0,7	BR9EYA	7548		BR9EIX	3981
ZR 440 Sno-Pro		440	2	1998-		0,7	BR9EYA	7548		BR9EIX	3981
ZR 440 Sno-Pro		440	2	1999-		0,7	BR9EYA	7548		BR9EIX	3981
ZR 440 Sno-Pro		440	2	2002-2002		0,7	BR9EYA	7548		BR9EIX	3981
ZR 440 Sno-Pro (Sno-Cross)		440	2	2000-2001		0,7	BR9EYA	7548		BR9EIX	3981
ZR 440 Sno-Pro (Cross Country)		440	2	2000-2001		0,7	BR9EYA	7548		BR9EIX	3981
500 Sno-Pro		500	2	2010-2014		0,7	BR9EYA	7548		BR9EIX	3981
Firecat 500		500	2	2003-2006		0,7	BR9EYA	7548		BR9EIX	3981
Firecat 500 Sno-Pro		500	2	2003-2006		0,7	BR9EYA	7548		BR9EIX	3981
Mountain Cat 500		500	2	2001-2002		0,7	BR9EYA	7548		BR9EIX	3981
Powder Special 500 EFI		500	2	1999-2000		0,7	BR9EYA	7548		BR9EIX	3981
Powder Special 500 EFI LE		500	2	2000-2000		0,7	BR9EYA	7548		BR9EIX	3981
Sabercat 500		500	2	2004-2006		0,7	BR9EYA	7548		BR9EIX	3981
Sabercat 500 LX		500	2	2004-2006		0,7	BR9EYA	7548		BR9EIX	3981
CrossFire 500 EFI		500	2	2007-2009		0,7	BR9EYA	7548		BR9EIX	3981
F 5 EFI		500	2	2007-2009		0,7	BR9EYA	7548		BR9EIX	3981
F 5		500	2	2013-2014		0,7	BR9EYA	7548		BR9EIX	3981
F 5 LXR		500	2	2007-2012	2stroke	0,7	BR9EYA	7548		BR9EIX	3981
M 5		500	2	2005-2006		0,7	BR9EYA	7548		BR9EIX	3981
T 500		500	2	2007-2009		0,7	BR9EYA	7548		BR9EIX	3981
ZL 500		500	2	1998-		0,7	BR9EYA	7548		BR9EIX	3981
ZL 500		500	2	1999-2000		0,7	BR9EYA	7548		BR9EIX	3981
ZL 500		500	2	2002-2002		0,7	BR9EYA	7548		BR9EIX	3981
ZL 500 EFI		500	2	1999-2000		0,7	BR9EYA	7548		BR9EIX	3981
ZL 500 EFI ESR		500	2	2001-		0,7	BR9EYA	7548		BR9EIX	3981
ZR 500		500	2	1998-	January	0,7	BR9EYA	7548		BR9EIX	3981
ZR 500		500	2	1998-	2nd Run	0,7	BR9EYA	7548		BR9EIX	3981
ZR 500		500	2	1999-2002		0,7	BR9EYA	7548		BR9EIX	3981
ZR 500 CC		500	2	2002-2002		0,7	BR9EYA	7548		BR9EIX	3981

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren


* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



											
ARCTIC CAT											
ZR 500 EFI		500	2	1999-2001		0,7	BR9EYA	7548		BR9EIX	3981
ZR 500 EFI LE		500	2	1999-		0,7	BR9EYA	7548		BR9EIX	3981
ZR 500 LE		500	2	1999-		0,7	BR9EYA	7548		BR9EIX	3981
ZR 500 LE		500	2	2002-2002		0,7	BR9EYA	7548		BR9EIX	3981
Bearcat 550		550	2	1995-1996		0,7	BR9ES	5722	Q208	BR9EIX	3981
Bearcat Wide Track 550		550	2	1996-1997		0,7	BR9ES	5722	Q208	BR9EIX	3981
Bearcat Wide Track 550		550	2	1998-		0,7	BR9EYA	7548		BR9EIX	3981
Bearcat Wide Track 550		550	2	1999-2002		0,7	BR9EYA	7548		BR9EIX	3981
Cheetah 550		550	2	1994-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Cougar 550		550	2	1995-1997		0,7	BR9ES	5722	Q208	BR9EIX	3981
Cougar 550		550	2	1998-		0,7	BR9EYA	7548		BR9EIX	3981
Cougar 2-Up 550		550	2	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Cougar Deluxe 550		550	2	1998-		0,7	BR9EYA	7548		BR9EIX	3981
Cougar Mountain Cat 550		550	2	1995-1997		0,7	BR9ES	5722	Q208	BR9EIX	3981
Cougar Mountain Cat 550		550	2	1998-		0,7	BR9EYA	7548		BR9EIX	3981
Pantera 550		550	2	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Pantera 550		550	2	2002-2005		0,7	BR9EYA	7548		BR9EIX	3981
Panther 550		550	2	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Panther 550		550	2	1998-		0,7	BR9EYA	7548		BR9EIX	3981
Panther 550		550	2	1999-2001		0,7	BR9EYA	7548		BR9EIX	3981
Prowler 550		550	2	1993-1994		0,7	BR9ES	5722	Q208	BR9EIX	3981
Prowler 2-Up 550		550	2	1993-1994		0,7	BR9ES	5722	Q208	BR9EIX	3981
Prowler 2-Up 550		550	2	1995-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EXT 550		550	2	1991-1993		0,7	BR9ES	5722	Q208	BR9EIX	3981
EXT 550 EFI		550	2	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EXT 550 EFI Mountain Cat		550	2	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EXT 550 Mountain Cat		550	2	1992-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EXT 550 Special		550	2	1991-1992		0,7	BR9ES	5722	Q208	BR9EIX	3981
ZL550		550	2	2001-2003		0,7	BR9EYA	7548		BR9EIX	3981
ZL550 ESR		550	2	2000-2000		0,7	BR9EYA	7548		BR9EIX	3981
ZL550 ESR		550	2	2001-2003		0,7	BR9EYA	7548		BR9EIX	3981
Bearcat 570		570	2	2004-2014		0,7	BR9EYA	7548		BR9EIX	3981
Bearcat 570 XT		570	2	2009-2014		0,7	BR9EYA	7548		BR9EIX	3981
Bearcat 570 XTE		570	2	2014-		0,7	BR9EYA	7548		BR9EIX	3981
Mountain Cat 570		570	2	2002-2004		0,7	BR9EYA	7548		BR9EIX	3981
Panther 570		570	2	2002-2002		0,7	BR9EYA	7548		BR9EIX	3981
Panther 570		570	2	2004-2007		0,7	BR9EYA	7548		BR9EIX	3981
Panther 570 ESR		570	2	2002-2002		0,7	BR9EYA	7548		BR9EIX	3981
Panther 570 ESR		570	2	2003-		0,7	BR9EYA	7548		BR9EIX	3981
Panther 570 R		570	2	2002-2002		0,7	BR9EYA	7548		BR9EIX	3981
F 570		570	2	2008-2014		0,7	BR9EYA	7548		BR9EIX	3981
T 570 Touring		570	2	2008-2014		0,7	BR9EYA	7548		BR9EIX	3981
Z 570		570	2	2002-2002		0,7	BR9EYA	7548		BR9EIX	3981
Z 570		570	2	2002-2007		0,7	BR9EYA	7548		BR9EIX	3981
Z 570 ESR		570	2	2003-		0,7	BR9EYA	7548		BR9EIX	3981
Z 570 ESR		570	2	2002-2002		0,7	BR9EYA	7548		BR9EIX	3981
Z 570 LX		570	2	2004-2007		0,7	BR9EYA	7548		BR9EIX	3981
Z 570 SS		570	2	2002-2002		0,7	BR9EYA	7548		BR9EIX	3981
EXT 580		580	2	1994-1996		0,7	BR9ES	5722	Q208	BR9EIX	3981
EXT 580 Moutain Cat		580	2	1993-1994		0,7	BR9ES	5722	Q208	BR9EIX	3981
EXT 580 Moutain Cat Wave		580	2	1994-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EXT 580 EFI		580	2	1995-1997		0,7	BR9ES	5722	Q208	BR9EIX	3981

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          										
ARCTIC CAT										
EXT 580 EFI		580	2	1998-		0,7	BR9EYA	7548		BR9EIX 3981
EXT 580 EFI MC Deep Lug		580	2	1995-		0,7	BR9ES	5722	Q208	BR9EIX 3981
EXT 580 EFI DELUXE		580	2	1996-1997		0,7	BR9ES	5722	Q208	BR9EIX 3981
EXT 580 EFI DELUXE		580	2	1998-		0,7	BR9EYA	7548		BR9EIX 3981
EXT 580 EFI Mountain cat		580	2	1994-1996		0,7	BR9ES	5722	Q208	BR9EIX 3981
EXT 580 EFI Mountain cat Wave		580	2	1994-		0,7	BR9ES	5722	Q208	BR9EIX 3981
EXT 580 Powder Special		580	2	1995-1996		0,7	BR9ES	5722	Q208	BR9EIX 3981
EXT 580 Z		580	2	1993-1994		0,7	BR9ES	5722	Q208	BR9EIX 3981
Pantera 580		580	2	1994-1997		0,7	BR9ES	5722	Q208	BR9EIX 3981
Pantera 580		580	2	1998-		0,7	BR9EYA	7548		BR9EIX 3981
Pantera 580 EFI		580	2	1999-2001		0,7	BR9EYA	7548		BR9EIX 3981
Powder Special 580		580	2	1997-		0,7	BR9EYA	7548		BR9EIX 3981
Powder Special 580 EFI		580	2	1997-		0,7	BR9EYA	7548		BR9EIX 3981
ZL 580 EFI ESR		580	2	2000-2000		0,7	BR9EYA	7548		BR9EIX 3981
ZR 580		580	2	1993-1996		0,7	BR9ES	5722	Q208	BR9EIX 3981
ZR 580		580	2	1997-		0,7	BR9EYA	7548		BR9EIX 3981
ZR 580 EFI		580	2	1995-1996		0,7	BR9ES	5722	Q208	BR9EIX 3981
ZR 580 EFI ETT		580	2	1996-		0,7	BR9ES	5722	Q208	BR9EIX 3981
600 Sno-Pro Racer		600	2	2008-2009		0,7	BR9EYA	7548		BR9EIX 3981
600 Sno-Pro Factory Racer		600	2	2010-2014		0,7	BR9EYA	7548		BR9EIX 3981
600 Sno-Pro Cross Country Racer		600	2	2011-2014		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600		600	2	2005-2006		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 Black Widow		600	2	2005-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 Early Build		600	2	2004-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 EXT		600	2	2004-2005		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 Fighter		600	2	2004-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 Jocker		600	2	2005-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 Nightfire		600	2	2004-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 Retro		600	2	2005-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 Team Arctic		600	2	2004-2005		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 Tiger		600	2	2004-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 R		600	2	2005-2006		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 Sno-Pro		600	2	2004-2006		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 Sno-Pro Black Widow		600	2	2005-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 Sno-Pro Fighter		600	2	2004-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 Sno-Pro Jocker		600	2	2005-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 Sno-Pro Nightfire		600	2	2004-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 Sno-Pro Retro		600	2	2005-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 Sno-Pro Team Arctic		600	2	2004-2005		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 600 Sno-Pro Tiger		600	2	2004-		0,7	BR9EYA	7548		BR9EIX 3981
Mountain Cat 600 EFI		600	2	2001-2004		0,7	BR9EYA	7548		BR9EIX 3981
Mountain Cat 600 EFI LE		600	2	2001-2002		0,7	BR9EYA	7548		BR9EIX 3981
Mountain Cat 600 VEV		600	2	2001-		0,7	BR9EYA	7548		BR9EIX 3981
Pantera 600		600	2	2003-2005		0,7	BR9EYA	7548		BR9EIX 3981
Pantera 600 ESR		600	2	2002-2002		0,7	BR9EYA	7548		BR9EIX 3981
Powder Extreme 600		600	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX 3981
Powder Extreme 600		600	3	1998-		0,7	BR9EYA	7548		BR9EIX 3981
Powder Special 2K 600		600	2	2000-2000		0,7	BR9EYA	7548		BR9EIX 3981
Powder Special 600		600	2	1998-		0,7	BR9EYA	7548		BR9EIX 3981
Powder Special 600		600	2	1999-		0,7	BR9EYA	7548		BR9EIX 3981
Powder Special 600		600	2	2000-2000		0,7	BR9EYA	7548		BR9EIX 3981
Powder Special 600 LE		600	2	2000-2000		0,7	BR9EYA	7548		BR9EIX 3981

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren

* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



ARCTIC CAT											
Powder Special 600 EFI		600	2	1998-		0,7	BR9EYA	7548		BR9EIX	3981
Powder Special 600 EFI		600	2	2000-2000		0,7	BR9EYA	7548		BR9EIX	3981
Powder Special 600 EFI I		600	2	1999-		0,7	BR9EYA	7548		BR9EIX	3981
Powder Special 600 EFI II LE		600	2	1999-		0,7	BR9EYA	7548		BR9EIX	3981
Powder Special 600 EFI LE		600	2	1998-		0,7	BR9EYA	7548		BR9EIX	3981
Powder Special 600 EFI LE		600	2	2000-2000		0,7	BR9EYA	7548		BR9EIX	3981
Sabercat 600		600	2	2004-2005		0,7	BR9EYA	7548		BR9EIX	3981
Sabercat 600 EXT		600	2	2004-2005		0,7	BR9EYA	7548		BR9EIX	3981
Sabercat 600 LX		600	2	2004-2006		0,7	BR9EYA	7548		BR9EIX	3981
Triple Touring 600		600	3	1999-		0,7	BR9EYA	7548		BR9EIX	3981
Triple Touring 600		600	3	2000-2001		0,7	BR9EYA	7548		BR9EIX	3981
AC 600 Modified Sno-Pro		600	2	2007-		0,7	BR9EYA	7548		BR9EIX	3981
CrossFire 600 EFI		600	2	2006-2011		0,7	BR9EYA	7548		BR9EIX	3981
CrossFire 600 Sno-Pro		600	2	2006-		0,7	BR9EYA	7548		BR9EIX	3981
EXT 600		600	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EXT 600 Tour		600	3	1998-		0,7	BR9EYA	7548		BR9EIX	3981
EXT 600 Triple		600	3	1998-		0,7	BR9EYA	7548		BR9EIX	3981
F6		600	2	2007-2008		0,7	BR9EYA	7548		BR9EIX	3981
F6 LXR		600	2	2007-2008		0,7	BR9EYA	7548		BR9EIX	3981
F6 Sno-Pro		600	2	2007-2011		0,7	BR9EYA	7548		BR9EIX	3981
M 6 EFI		600	2	2005-2011		0,7	BR9EYA	7548		BR9EIX	3981
M6000 Sno-Pro		600	2	2014-		0,7	BPR9ES	7788		BPR9EIX	6853
ZL 600		600		1999-2000		0,7	BR9EYA	7548		BR9EIX	3981
ZL 600 EFI		600		1999-2003	SN --> 9915688	0,7	BR9EYA	7548		BR9EIX	3981
ZL 600 EFI		600	2	1999-2003	SN 9915689-->	0,7	BR9EYA	7548		BR9EIX	3981
ZL 600 EFI ESR		600	2	2001-2003		0,7	BR9EYA	7548		BR9EIX	3981
ZL 600 EFI SS		600	2	2002-2003		0,7	BR9EYA	7548		BR9EIX	3981
ZL 600 EFI SS ESR		600	2	2002-2003		0,7	BR9EYA	7548		BR9EIX	3981
ZR 600		600	2	1999-		0,7	BR9EYA	7548		BR9EIX	3981
ZR 600		600	2	2000-2000		0,7	BR9EYA	7548		BR9EIX	3981
ZR 600		600	2	2001-2002		0,7	BR9EYA	7548		BR9EIX	3981
ZR 600 2ND RUN		600	2	1998-		0,7	BR9EYA	7548		BR9EIX	3981
ZR 600 Blair Morgan Signature Edition		600	2	2000-2000		0,7	BR9EYA	7548		BR9EIX	3981
ZR 600 CC		600	2	2002-2002		0,7	BR9EYA	7548		BR9EIX	3981
ZR 600 EFI		600	2	1998-		0,7	BR9EYA	7548		BR9EIX	3981
ZR 600 EFI		600	2	1999-2001		0,7	BR9EYA	7548		BR9EIX	3981
ZR 600 EFI LE		600	2	1998-		0,7	BR9EYA	7548		BR9EIX	3981
ZR 600 EFI LE		600	2	1999-2001		0,7	BR9EYA	7548		BR9EIX	3981
ZR 600 EFI LE Reverse		600	2	2000-2000		0,7	BR9EYA	7548		BR9EIX	3981
ZR 600 EFI LE XC		600	2	1998-		0,7	BR9EYA	7548		BR9EIX	3981
ZR 600 January		600	2	1998-		0,7	BR9EYA	7548		BR9EIX	3981
ZR 600 VEV		600	2	2001-		0,7	BR9EYA	7548		BR9EIX	3981
ZR 6000 EL Tigre Sno-Pro LTD		600	2	2014-		0,7	BPR9ES	7788		BPR9EIX	6853
ZR 6000 EL Tigre Sno-Pro ES LTD		600	2	2014-		0,7	BPR9ES	7788		BPR9EIX	6853
ZR 6000 Sno-Pro LTD ES		600	2	2015-		0,7	BPR9ES	7788		BPR9EIX	6853
ZR 6000 Sno-Pro RR		600	2	2014-		0,7	BPR9ES	7788		BPR9EIX	6853
ZR 6000 Sno-Pro RR		600	2	2015-		0,7	BPR9ES	7788		BPR9EIX	6853
ZR 6000 Tucker Hibbert RR		600	2	2015-		0,7	BPR9ES	7788		BPR9EIX	6853
ZRT 600		600	3	1995-1997		0,7	BR9ES	5722	Q208	BR9EIX	3981
ZRT 600		600	3	1998-1999		0,7	BR9EYA	7548		BR9EIX	3981
ZRT 600		600	3	2000-2001		0,7	BR9EYA	7548		BR9EIX	3981
ZRT 600		600	3	2002-2002		0,7	BR9EYA	7548		BR9EIX	3981

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          										
ARCTIC CAT										
ZRT 600 LE		600	3	2001-		0,7	BR9EYA	7548		BR9EIX 3981
Bearcat Wide Track 660		660	3	2003-2008		0,8	KR8AI	5477		
Bearcat Wide Track WT660 Turbo		660	3	2006-2008		0,8	KR8AI	5477		
Panther 660 Touring		660	3	2006-2008	4stroke	0,8	KR8AI	5477		
Panther 660 Trail		660	3	2006-2007	4stroke	0,8	KR8AI	5477		
T 660 Touring		660	3	2002-2002		0,8	DCPR7E	3932		DCPR7EIX 6046
T 660 Touring		660	3	2003-2008		0,8	KR8AI	5477		
T 660 Turbo ST		660	3	2005-2006		0,8	KR8AI	5477		
T 660 Turbo ST Early Build		660	3	2005-		0,8	KR8AI	5477		
T 660 Turbo Touring		660	3	2003-2007		0,8	KR8AI	5477		
T 660 Turbo Touring LE		660	3	2006-2007		0,8	KR8AI	5477		
T 660 Turbo Trail		660	3	2003-2007		0,8	KR8AI	5477		
T 660 Turbo Trail LE		660	3	2006-2007		0,8	KR8AI	5477		
T 660 Trail		660	3	2002-2002		0,8	DCPR7E	3932		DCPR7EIX 6046
Firecat 700		700	2	2003-2006		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 EXT		700	2	2004-2005		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 Black Widow		700	2	2005-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 Fighter		700	2	2004-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 Jocker		700	2	2005-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 Nightfire		700	2	2004-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 Retro		700	2	2005-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 Tiger		700	2	2004-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 Team Arctic		700	2	2004-2005		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 Towy Stewart Edition		700	2	2006-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 R		700	2	2005-2006		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 Sno-Pro		700	2	2003-2006		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 Sno-Pro Black Widow		700	2	2005-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 Sno-Pro Jocker		700	2	2005-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 Sno-Pro Fighter		700	2	2004-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 Sno-Pro Nightfire		700	2	2004-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 Sno-Pro Retro		700	2	2005-		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 Sno Pro Team Arctic		700	2	2004-2005		0,7	BR9EYA	7548		BR9EIX 3981
Firecat 700 Sno-Pro Tiger		700	2	2004-		0,7	BR9EYA	7548		BR9EIX 3981
Powder Special 700		700	2	1999-2000		0,7	BR9EYA	7548		BR9EIX 3981
Powder Special 700 LE		700	2	1999-2000		0,7	BR9EYA	7548		BR9EIX 3981
Sabercat 700		700	2	2004-2005		0,7	BR9EYA	7548		BR9EIX 3981
Sabercat 700 EXT		700	2	2004-2006		0,7	BR9EYA	7548		BR9EIX 3981
Sabercat 700 LX		700	2	2004-2006		0,7	BR9EYA	7548		BR9EIX 3981
Wildcat 700		700	2	1991-1996		0,7	BR9ES	5722	Q208	BR9EIX 3981
Wildcat 700 EFI		700	2	1991-1994		0,7	BR9ES	5722	Q208	BR9EIX 3981
Wildcat 700 EFI Mountain Cat		700	2	1991-1994		0,7	BR9ES	5722	Q208	BR9EIX 3981
Wildcat 700 MC Deep Lug		700	2	1995-		0,7	BR9ES	5722	Q208	BR9EIX 3981
Wildcat 700 Mountain Cat		700	2	1991-1996		0,7	BR9ES	5722	Q208	BR9EIX 3981
Wildcat 700 Touring		700	2	1995-1996		0,7	BR9ES	5722	Q208	BR9EIX 3981
CrossFire 700		700	2	2006-		0,7	BR9EYA	7548		BR9EIX 3981
CrossFire 700 West Yellowstone		700	2	2006-		0,7	BR9EYA	7548		BR9EIX 3981
CrossFire 700 Early Build		700	2	2006-		0,7	BR9EYA	7548		BR9EIX 3981
CrossFire 700 Sno-Pro		700	2	2006-		0,7	BR9EYA	7548		BR9EIX 3981
M7		700	2	2005-2006		0,7	BR9EYA	7548		BR9EIX 3981
M7 CT		700	2	2006-		0,7	BR9EYA	7548		BR9EIX 3981
M7 West Yellowstone		700	2	2006-		0,7	BR9EYA	7548		BR9EIX 3981
M7 LE		700	2	2005-2006		0,7	BR9EYA	7548		BR9EIX 3981

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren

* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



											
ARCTIC CAT											
M7 LE CT		700	2	2006-		0,7	BR9EYA	7548		BR9EIX	3981
ZL 700		700	2	2000-2000		0,7	BR9EYA	7548		BR9EIX	3981
ZR 700		700	2	1994-1995		0,7	BR9ES	5722	Q208	BR9EIX	3981
ZR 700		700	2	1999-2000		0,7	BR9EYA	7548		BR9EIX	3981
ZR 700 LE		700	2	2000-2000		0,7	BR9EYA	7548		BR9EIX	3981
ZR 700 LE Reverse		700	2	2000-2000		0,7	BR9EYA	7548		BR9EIX	3981
Mountain Cat 800		800	2	2001-2004		0,7	BR9EYA	7548		BR9EIX	3981
Mountain Cat 800 LE		800	2	2001-2002		0,7	BR9EYA	7548		BR9EIX	3981
Pantera 800		800	3	1998-1999		0,7	BR9EYA	7548		BR9EIX	3981
Pantera 800		800	2	2003-2005		0,7	BR9EYA	7548		BR9EIX	3981
Pantera 800 ESR		800	2	2002-2002		0,7	BR9EYA	7548		BR9EIX	3981
CrossFire EFI 8		800	2	2007-2011	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
CrossFire 8 EFI Sno-Pro		800	2	2007-2011	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
CrossFire 8 EFI Sno-Pro LE		800	2	2009-2009	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
CrossFire 8 EFI Sno-Pro LTD		800	2	-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
CrossFireR 8		800	2	2009-2011	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
CrossFireR 8 LE		800	2	2009-2009	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
F 8 EFI		800	2	2008-2010	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
F 8 LE		800	2	2009-2009	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
F 8 LXR		800	2	2008-2011	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
F 8 EFI Sno-Pro		800	2	2007-2010	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
F 8 Sno-Pro LXR LTD		800	2	2011-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
F 8 Sno-Pro Tony Stewart Edition		800	2	2007-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
F 8 EXT		800	2	2011-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
F 800 LXR		800	2	2012-2013	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
F 800 SnoPro		800	2	2012-2013	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
F 800 SnoPro 50th Anniversary		800	2	2012-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
F 800 SnoPro RR		800	2	2013-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
F 800 SnoPro LTD		800	2	2012-2013	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
F 800 Tucker Hibbert Race Replica		800	2	2013-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 8		800	2	2007-2011	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 8 Sno-Pro		800	2	2007-2011	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 8 Sno-Pro LE		800	2	2009-2009	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 8 Sno-Pro LTD		800	2	2011-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 8 HCR		800	2	2009-2011	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 800		800	2	2012-2013	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 800 Sno-Pro		800	2	2012-2013	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 800 Sno-Pro Anniversay		800	2	2012-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 800 Sno-Pro LTD		800	2	2012-2013	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 800 HCR		800	2	2012-2013	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 8000		800	2	2014-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 8000 Sno-Pro		800	2	2014-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 8000 Sno-Pro LTD		800	2	2014-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 8000 Sno-Pro LTD ES		800	2	2014-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 8000 HCR		800	2	2014-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 800 LXR		800	2	2012-2013	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 800 Sno-Pro		800	2	2012-2013	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 800 Sno-Pro 50th Anniversary		800	2	2012-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 800 Sno-Pro High Country		800	2	2012-2013	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 800 Sno-Pro High Country LTD		800	2	2013-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 800 Sno-Pro LTD		800	2	2012-2013	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 800 CrossTour		800	2	2013-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
ARCTIC CAT											
XF 8000 LXR		800	2	2014-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 8000 LXR		800	2	2015-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 8000 Sno-Pro		800	2	2014-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 8000 Sno-Pro		800	2	2015-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 8000 Sno-Pro LTD		800	2	2014-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 8000 Sno-Pro LTD		800	2	2015-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 8000 Cross Country LTD		800	2	2015-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 8000 Cross Country Sno-Pro		800	2	2014-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 8000 Cross Country Sno-Pro		800	2	2015-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 8000 High Country LTD		800	2	2015-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 8000 High Country Sno-Pro		800	2	2014-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 8000 High Country Sno-Pro		800	2	2015-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 8000 High Country Sno-Pro LTD ES		800	2	2014-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 8000 CrossTour		800	2	2014-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 8000 CrossTour		800	2	2015-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
ZL 800 ESR		800	2	2001-2003		0,7	BR9EYA	7548		BR9EIX	3981
ZL 800 ESR Illusion		800	2	2001-		0,7	BR9EYA	7548		BR9EIX	3981
ZL 800 SS		800	2	2002-2003		0,7	BR9EYA	7548		BR9EIX	3981
ZR 800		800	2	2001-2003		0,7	BR9EYA	7548		BR9EIX	3981
ZR 800 CC		800	2	2002-2002		0,7	BR9EYA	7548		BR9EIX	3981
ZR 800 LE		800	2	2001-		0,7	BR9EYA	7548		BR9EIX	3981
ZR 800 Sno-Pro		800	2	2003-		0,7	BR9EYA	7548		BR9EIX	3981
ZR 8000 LXR		800	2	2014-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
ZR 8000 LXR		800	2	2015-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
ZR 8000 Sno-Pro		800	2	2014-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
ZR 8000 Sno-Pro		800	2	2015-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
ZR 8000 Sno-Pro LTD		800	2	2015-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
ZR 8000 Sno-Pro LTD ES		800	2	2014-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
ZR 8000 Sno-Pro LTD ES		800	2	2015-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
ZR 8000 Sno-Pro RR		800	2	2014-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
ZR 8000 Sno-Pro RR		800	2	2015-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
ZR 8000 Sno-Pro LTD RR NE OS		800	2	2014-	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
ZRT 800		800	3	1995-1997		0,7	BR9ES	5722	Q208	BR9EIX	3981
ZRT 800		800	3	1998-1999		0,7	BR9EYA	7548		BR9EIX	3981
ZRT 800		800	3	2000-2001		0,7	BR9EYA	7548		BR9EIX	3981
ZRT 800 LE		800	3	2001-		0,7	BR9EYA	7548		BR9EIX	3981
King Cat 900		900	2	2004-2006		0,7	BR9EYA	7548		BR9EIX	3981
King Cat 900 Early Build		900	2	2005-		0,7	BR9EYA	7548		BR9EIX	3981
Mountain Cat 900		900	2	2003-2004		0,7	BR9EYA	7548		BR9EIX	3981
Mountain Cat 900 1M		900	2	2003-		0,7	BR9EYA	7548		BR9EIX	3981
Mountain Cat 900 Early Build		900	2	2003-		0,7	BR9EYA	7548		BR9EIX	3981
Thundercat 900		900	3	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Thundercat 900		900	3	1994-1997		0,7	BR9ES	5722	Q208	BR9EIX	3981
Thundercat 900 MC		900	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Thundercat 900 MC Deep Lug		900	3	1995-		0,7	BR9ES	5722	Q208	BR9EIX	3981
Thundercat 900 Mountain Cat		900	3	1994-1996		0,7	BR9ES	5722	Q208	BR9EIX	3981
Thundercat 900 Mountain Cat W		900	3	1994-		0,7	BR9ES	5722	Q208	BR9EIX	3981
ZR 900		900	2	2003-2006		0,7	BR9EYA	7548		BR9EIX	3981
ZR 900 Early Build		900	2	2003-		0,7	BR9EYA	7548		BR9EIX	3981
ZR 900 Sno-Pro		900	2	2003-2006		0,7	BR9EYA	7548		BR9EIX	3981
Bearcat Z1 XT		1000	2	2009-2014		0,9	MR8A19	7692			
Bearcat Z1 XT LTD		1000	2	2011-2014		0,9	MR8A19	7692			

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren

* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



ARCTIC CAT											
Bearcat Z1 XT GS		1000	2	2012-2014		0,9	MR8AI9	7692			
Mountain Cat 1000		1000	3	2001-2001		0,7	BR9EYA	7548		BR9EIX	3981
Mountain Cat 1000		1000	3	2002-2002		0,7	BR9EYA	7548		BR9EIX	3981
Pantera 1000		1000	3	2000-2001		0,7	BR9EYA	7548		BR9EIX	3981
Thundercat 1000		1000	3	1998-1999		0,7	BR9EYA	7548		BR9EIX	3981
Thundercat 1000		1000	3	2000-2001		0,7	BR9EYA	7548		BR9EIX	3981
Thundercat 1000		1000	3	2002-2002		0,7	BR9EYA	7548		BR9EIX	3981
Thundercat 1000 MC		1000	3	1998-1999		0,7	BR9EYA	7548		BR9EIX	3981
Thundercat 1000 MC		1000	3	2000-2000		0,7	BR9EYA	7548		BR9EIX	3981
Thundercat 1000 THC		1000	3	2000-2000		0,7	BR9EYA	7548		BR9EIX	3981
CrossFire 1000 EFI		1000	2	2007-2009	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
CrossFire 1000 EFI Sno-Pro		1000	2	2007-2009	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
CrossFire 1000 EFI Sno-Pro Nitefire		1000	2	2009-2009	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
CrossFireR 1000		1000	2	2009-2011	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
CrossFireR 1000 LE		1000	2	2009-2009	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
F 1000 EFI		1000	2	2007-2008	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
F 1000 EFI LXR		1000	2	2007-2008	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
F 1000 EFI Sno-Pro		1000	2	2007-2009	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 1000		1000	2	2007-2009	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 1000 Sno-Pro		1000	2	2007-2011	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
M 1000 Sno-Pro LE		1000	2	2009-2009	TwinSpark	0,7	BR9EYA	7548		BR9EIX	3981
XF 7000 LXR		1050	3	2014-		0,8	CR9E	6263	Q227	CR9EIX	3521
XF 7000 Sno-Pro		1050	3	2014-		0,8	CR9E	6263	Q227	CR9EIX	3521
XF 7000 Sno-Pro LTD		1050	3	2014-		0,8	CR9E	6263	Q227	CR9EIX	3521
XF 7000 Sno-Pro Cross Country		1050	3	2014-		0,8	CR9E	6263	Q227	CR9EIX	3521
XF 7000 CrossTour		1050	3	2014-		0,8	CR9E	6263	Q227	CR9EIX	3521
XF 7000 CrossTour Sno-Pro		1050	3	2014-		0,8	CR9E	6263	Q227	CR9EIX	3521
ZR 7000 LXR		1050	3	2014-		0,8	CR9E	6263	Q227	CR9EIX	3521
ZR 7000 LXR		1050	3	2015-		0,8	CR9E	6263	Q227	CR9EIX	3521
ZR 7000 Sno-Pro		1050	3	2014-		0,8	CR9E	6263	Q227	CR9EIX	3521
ZR 7000 Sno-Pro		1050	3	2015-		0,8	CR9E	6263	Q227	CR9EIX	3521
ZR 7000 Sno-Pro LTD		1050	3	2015-		0,8	CR9E	6263	Q227	CR9EIX	3521
ZR 7000 Sno-Pro LTD El Tigre		1050	3	2015-		0,8	CR9E	6263	Q227	CR9EIX	3521
ZR 7000 Sno-Pro RR		1050	3	2015-		0,8	CR9E	6263	Q227	CR9EIX	3521
ZR 7000 Sno-Pro RR Early Build		1050	3	2015-		0,8	CR9E	6263	Q227	CR9EIX	3521
F 1100 LXR		1100	2	2012-2013		0,9	MR8AI9	7692			
F 1100 Turbo LXR		1100	2	2012-2013		0,9	MR8AI9	7692			
F 1100 SnoPro		1100	2	2012-2013		0,9	MR8AI9	7692			
F 1100 SnoPro 50 Anniversary		1100	2	2012-		0,9	MR8AI9	7692			
F 1100 SnoPro LTD		1100	2	2012-2013		0,9	MR8AI9	7692			
F 1100 Turbo SnoPro		1100	2	2012-2013		0,9	MR8AI9	7692			
F 1100 Turbo SnoPro 50 Anniversary		1100	2	2012-		0,9	MR8AI9	7692			
F 1100 Turbo SnoPro LTD		1100	2	2012-2013		0,9	MR8AI9	7692			
F 1100 Turbo SnoPro RR		1100	2	2013-		0,9	MR8AI9	7692			
M 1100		1100	2	2012-2013		0,9	MR8AI9	7692			
M 1100 Turbo		1100	2	2012-2013		0,9	MR8AI9	7692			
M 1100 Sno-Pro		1100	2	2012-2013		0,9	MR8AI9	7692			
M 1100 Sno-Pro 50th Anniversary		1100	2	2012-		0,9	MR8AI9	7692			
M 1100 Sno-Pro LTD		1100	2	2012-2013		0,9	MR8AI9	7692			
M 1100 Turbo Sno-Pro		1100	2	2012-2013		0,9	MR8AI9	7692			
M 1100 Turbo Sno-Pro 50th Anniversary		1100	2	2012-		0,9	MR8AI9	7692			
M 1100 Turbo Sno-Pro LTD		1100	2	2012-2013		0,9	MR8AI9	7692			

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren



* Please adjust the groundelectrode gap

* Veuillez vérifier l' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
ARCTIC CAT											
M 1100 Turbo High Country		1100	2	2012-2013		0,9	MR8A19	7692			
M 9000 Turbo		1100	2	2014-		0,9	MR8A19	7692			
M 9000 Sno-Pro Turbo		1100	2	2014-		0,9	MR8A19	7692			
M 9000 Sno-Pro LTD Turbo		1100	2	2014-		0,9	MR8A19	7692			
M 9000 HCR Turbo		1100	2	2014-		0,9	MR8A19	7692			
TZ1 Park Version		1100	2	2009-2009		0,9	MR8A19	7692			
TZ1 Touring		1100	2	2008-2014		0,9	MR8A19	7692			
TZ1 Touring LXR		1100	2	2008-2014		0,9	MR8A19	7692			
TZ1 Turbo LXR		1100	2	2009-2014		0,9	MR8A19	7692			
TZ1 Turbo LXR LE		1100	2	2009-2010		0,9	MR8A19	7692			
XF 1100 LXR		1100	2	2012-2013		0,9	MR8A19	7692			
XF 1100 SnoPro		1100	2	2012-2013		0,9	MR8A19	7692			
XF 1100 SnoPro LTD		1100	2	2012-2013		0,9	MR8A19	7692			
XF 1100 SnoPro 50th Anniversary		1100	2	2012-		0,9	MR8A19	7692			
XF 1100 Turbo LXR		1100	2	2012-2013		0,9	MR8A19	7692			
XF 1100 Turbo SnoPro		1100	2	2012-2013		0,9	MR8A19	7692			
XF 1100 Turbo Sno-Pro 50th Anniversary		1100	2	2012-		0,9	MR8A19	7692			
XF 1100 Turbo SnoPro LTD		1100	2	2012-2013		0,9	MR8A19	7692			
XF 1100 Turbo SnoPro HiCountry		1100	2	2012-2013		0,9	MR8A19	7692			
XF 1100 Turbo SnoPro HiCountry LTD		1100	2	2013-		0,9	MR8A19	7692			
XF 1100 CrossTour		1100	2	2013-		0,9	MR8A19	7692			
XF 1100 Turbo CrossTour		1100	2	2013-		0,9	MR8A19	7692			
XF 9000 LXR		1100	2	2014-		0,9	MR8A19	7692			
XF 9000 Sno-Pro		1100	2	2014-		0,9	MR8A19	7692			
XF 9000 Sno-Pro LTD		1100	2	2014-		0,9	MR8A19	7692			
XF 9000 Sno-Pro LTD 137 Early Build		1100	2	2015-		0,9	MR8A19	7692			
XF 9000 Sno-Pro Cross Country		1100	2	2014-		0,9	MR8A19	7692			
XF 9000 High Country Sno-Pro		1100	2	2014-		0,9	MR8A19	7692			
XF 9000 High Country Sno-Pro LTD		1100	2	2014-		0,9	MR8A19	7692			
XF 9000 CrossTour		1100	2	2014-		0,9	MR8A19	7692			
Jaguar Z1		1100	2	2007-2008	Suzuki Engine / 4stroke	0,9	MR8A19	7692			
Jaguar Z1 Early Build		1100	2	2007-		0,9	MR8A19	7692			
Jaguar Z1 Sno-Pro & Nitefire Sno-Pro		1100	2	2008-	Suzuki Engine / 4stroke	0,9	MR8A19	7692			
Z1 EFI		1100	2	2009-2010		0,9	MR8A19	7692			
Z1 EFI LXR		1100	2	2010-2011		0,9	MR8A19	7692			
Z1 Sno-Pro		1100	2	2011-		0,9	MR8A19	7692			
Z1 Turbo		1100	2	2009-2010		0,9	MR8A19	7692			
Z1 Turbo LE		1100	2	2009-2009		0,9	MR8A19	7692			
Z1 Turbo LXR		1100	2	2009-2011		0,9	MR8A19	7692			
Z1 Turbo Sno-Pro		1100	2	2009-2011		0,9	MR8A19	7692			
Z1 Turbo Sno-Pro LE		1100	2	2010-		0,9	MR8A19	7692			
Z1 Turbo Sno-Pro LTD		1100	2	2011-		0,9	MR8A19	7692			
Z1 Turbo EXT		1100	2	2010-2011		0,9	MR8A19	7692			
Z1 Turbo EXT LE		1100	2	2010-		0,9	MR8A19	7692			
Z1 Turbo EXT Sno-Pro		1100	2	2010-		0,9	MR8A19	7692			
ZR 5000 LXR		1100	2	2014-	4stroke	0,9	MR8A19	7692			
ZR 5000 LXR Early build		1100	2	2015-		0,9	MR8A19	7692			
ZR 9000 EL Tigre early Build		1100	2	2015-		0,9	MR8A19	7692			
ZR 9000 Turbo LXR		1100	2	2014-		0,9	MR8A19	7692			
ZR 9000 Sno-Pro Turbo		1100	2	2014-		0,9	MR8A19	7692			
ZR 9000 Sno-Pro LTD Turbo		1100	2	2014-		0,9	MR8A19	7692			
ZR 9000 Sno-Pro RR Turbo		1100	2	2014-		0,9	MR8A19	7692			

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



<div></div>											
BLADE											
1W-X		600		2002-		0,7	BR9ES	5722		BR9EIX	3981
6X2		600		2001-		0,7	BR9ES	5722		BR9EIX	3981
STRIKER X		600		2002-		0,7	BR9ES	5722		BR9EIX	3981
1W-X		700		2002-		0,7	BR9ES	5722		BR9EIX	3981
7X2		700		2000-2001		0,7	BR9ES	5722		BR9EIX	3981
HYLANDER X		700		2002-		0,7	BR9ES	5722		BR9EIX	398
STRIKER X		700		2002-		0,7	BR9ES	5722		BR9EIX	3981
1W-X		800		2002-		0,7	BR9ES	5722		BR9EIX	3981
8X2		800		2001-		0,7	BR9ES	5722		BR9EIX	3981
HYLANDER X		800		2002-		0,7	BR9ES	5722		BR9EIX	3981
STRIKER X		800		2002-		0,7	BR9ES	5722		BR9EIX	3981
BOLENS											
292, 295, R295		292		-		0,6	B8HS	5510	Q205	BR8HIX	7001
315		310		-		0,6	B8HS	5510	Q205	BR8HIX	7001
340, R340		336		-		0,6	B8HS	5510	Q205	BR8HIX	7001
399, R399		396		-		0,6	B8HS	5510	Q205	BR8HIX	7001
440, R440		438		-		0,6	B8HS	5510	Q205	BR8HIX	7001
BOMBARDIER											
250 M		247		-	BSE Engine	0,6	B7HS	5110	Q204	BR7HIX	7067
296		294		-	BSE Engine	0,6	B8HS	5510	Q205	BR8HIX	7001
340 T, 340 SS		336		-	BSE Engine / 12.7mm(1/2") Reach	0,6	B7HS	5110	Q204	BR7HIX	7067
340 T, 340 SS		336		-	BSE Engine / 19.0mm(3/4") Reach	0,6	B8ES	2411	Q201	BR8EIX	5044
339		399		-	BSE Engine	0,6	B8ES	2411	Q201	BR8EIX	5044
440 T, 440 SS		435		-	BSE Engine / 12.7mm(1/2") Reach	0,6	B7HS	5110	Q204	BR7HIX	7067
440 T, 440 SS		435		-	BSE Engine / 19.0mm(3/4") Reach	0,6	B8ES	2411	Q201	BR8EIX	5044
439		437		-	BSE Engine	0,6	B8ES	2411	Q201	BR8EIX	5044
Mini Z				-	Rotax Engine	0,7	BPR6ES	4852		BPR6EIX	6637
250 Deluxe, 250T		247		-	Rotax Engine	0,5	B7HS	5110	Q204	BR7HIX	7067
250		247		-	Rotax Engine 10-12HP	0,5	AB-6	2910			
250		247		-	Rotax Engine 14HP	0,5	AB-7	3010			
250 E		247		-	Rotax Engine	0,5	AB-7	3010			
250 SS		247		-	Rotax Engine	0,5	B8HS	5510	Q205	BR8HIX	7001
TNT, RV250		247		-	Rotax Engine	0,5	B8ES	2411	Q201	BR8EIX	5044
253 Safari Citation/E		248		-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981
247 Elan, Spirit		250		-	Rotax Engine	0,5	AB-7	3010			
253 Citation L/S		253		-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981
253 Citation L/S Elec.		253		-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981
253 Tunda, -LT		253		-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981
277 Citation 3500		269		-1981	Rotax Engine	0,5	B8ES	2411	Q201	BR8EIX	5044
277 Mirage I		269		-1981	Rotax Engine	0,5	B8ES	2411	Q201	BR8EIX	5044
Tundra 280F		280		-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981
TNT 292		292		-	Rotax Engine	0,5	AB-8	7909			
TNT 294, TNT300SM		292		-	Rotax Engine	0,5	B8HS	5510	Q205	BR8HIX	7001
300 Citation		294		-	Rotax Engine	0,5	B8HS	5510	Q205	BR8HIX	7001
300 SS, 300 E, 300 Olym.		294		-	Rotax Engine	0,5	B8HS	5510	Q205	BR8HIX	7001
300		299		-	Rotax Engine 12.0HP	0,5	AB-6	2910			
300		299		-	Rotax Engine 15.0HP 16.0HP	0,5	AB-7	3010			
300 S		299		-	Rotax Engine	0,5	AB-7	3010			

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
BOMBARDIER											
320 E		318	-	Rotax Engine	0,5	AB-7	3010				
320 SS		318	-	Rotax Engine	0,5	AB-8	7909				
420		318	-	Rotax Engine	0,5	AB-7	3010				
335, 335 E		335	-	Rotax Engine	0,5	AB-7	3010				
TNT, RV 340, Sonic 340		337	-	Rotax Engine	*				BR10EIX	6801	
TNT 340, TNT 340 SE		337	-	Rotax Engine	0,5	B8HS	5510	Q205	BR8HIX	7001	
340, 340 E		339	-	Rotax Engine	0,5	B8HS	5510	Q205	BR8HIX	7001	
340, 340 E Olym.Ever		339	-	Rotax Engine	0,5	B9HS	5810		BR9HIX	5687	
340 SS		339	-	Rotax Engine	0,5	AB-8	7909				
354 Blizzard 6500		339	-	Rotax Engine	*				BR10EIX	6801	
354 Blizzard 7500, -Plus		339	-	Rotax Engine	*				BR10EIX	6801	
354 Super Sonic/LC		339	-	Rotax Engine	*				BR10EIX	6801	
Nuvik 1979		339	-	Rotax Engine	0,5	B9HS	5810		BR9HIX	5687	
TN T340 Free Air		339	-	Rotax Engine	0,5	B9ES	2611	Q202	BR9EIX	3981	
TNT 340 SM		339	-	Rotax Engine	0,5	B8HS	5510	Q205	BR8HIX	7001	
370		368	-	Rotax Engine	0,5	B7HS	5110	Q204	BR7HIX	7067	
377 Safari Saga		368	-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981	
377 Safari Scout/E		368	-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981	
371		369	-	Rotax Engine	0,5	B7HS	5110	Q204	BR7HIX	7067	
377 Formula S		377	-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981	
377 Mirage III		377	-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981	
377 Safari, -E		377	-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981	
377 Touring E/ELT		377	-	Rotax Engine	0,4	BR9ES	5722	Q208	BR9EIX	3981	
380 Scandic 380		380	-	Rotax Engine	0,4	BR9ES	5722	Q208	BR9EIX	3981	
Legend Fan 380F		380	-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981	
Legend GT 380F		380	-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981	
MX Z Fan		380	-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981	
399		399	-	Rotax Engine	0,5	B8HS	5510	Q205	BR8HIX	7001	
400, 400E		399	-	Rotax Engine	0,5	B8HS	5510	Q205	BR8HIX	7001	
TNT 399		399	-	Rotax Engine	0,5	B8HS	5510	Q205	BR8HIX	7001	
TNT 400 Free Air		399	-	Rotax Engine	0,5	B10ES	7928		BR10EIX	6801	
440 MX-Z 440/F		436	-	Rotax Engine	0,4	BR9ES	5722	Q208	BR9EIX	3981	
444 Elite		436	-	Rotax Engine	0,5	B8ES	2411	Q201	BR8EIX	5044	
444 LC Everest, Futura		436	-	Rotax Engine	0,5	B8ES	2411	Q201	BR8EIX	5044	
440, 440E		437	-	Rotax Engine	0,5	AB-8	7909				
440 ER, 440R		437	-	Rotax Engine	0,5	AB-7	3010				
447 Grand Luxe		437	-	Rotax Engine	0,5	BR8ES	5422	Q207	BR8EIX	5044	
447 Nordic 50		437	-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981	
447 Safari 447		437	-	Rotax Engine	0,5	BR8ES	5422	Q207	BR8EIX	5044	
454 Blizzard 9500/Plus		437	-	Rotax Engine	*				BR10EIX	6801	
Olympique Plus		437	-	Rotax Engine	0,5	AB-7	3010				
TNT 440		437	-	Rotax Engine	0,5	AB-8	7909				
TNT 440 Free Air		437	-	Rotax Engine / 14mm Head	0,5	B9ES	2611	Q202	BR9EIX	3981	
TNT 440 Free Air		437	-	Rotax Engine / 18mm Head	0,5	AB-7	3010				
TNT 440SE		437	-	Rotax Engine	0,5	AB-8	7909				
TNT 440SM		437	-	Rotax Engine	0,5	AB-8	7909				
440 Touring LE		440	-	Rotax Engine	0,4	BR9ES	5722	Q208	BR9EIX	3981	
MX Zx Racing 440		440	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
Skandic LT 440F		440	-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981	
Skandic LT(E) 440F		440	-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981	
443 Touring LE		443	-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981	
454 MXZ 440		454	-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981	

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
BOMBARDIER											
454 Ultra Sonic		463	-	Rotax Engine	*					BR10EIX	6801
462 SS25, SP, SS		463	-	Rotax Engine	0,5	BR8ES	5422	Q207		BR8EIX	5044
464 Elite		463	-1981	Rotax Engine	0,5	B8ES	2411	Q201		BR8EIX	5044
464 Everest LC		463	-1981	Rotax Engine	0,5	B8ES	2411	Q201		BR8EIX	5044
464 Futura LC		463	-1981	Rotax Engine	0,5	B8ES	2411	Q201		BR8EIX	5044
494 Formula SLS		494	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
494 Skandic WT LC		494	-	Rotax Engine	0,5	BR8ES	5422	Q207		BR8EIX	5044
494 Summit 500		494	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
467 Formula MX/LT		496	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
503 Alpine II		496	-	Rotax Engine	0,5	BR8ES	5422	Q207		BR8EIX	5044
503 Escapade		496	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
503 Nordic 60		496	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
503 Safari 503R		496	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
503 Safari Cheyenne		497	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
503 Safari Escapade		497	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
503 Safari Voyageur		497	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
500 GT 500		500	-	Rotax Engine	0,4	BR9ES	5722	Q208		BR9EIX	3981
500 Scandic 500		500	-	Rotax Engine	0,4	BR9ES	5722	Q208		BR9EIX	3981
GSX Sport 1+1 500 SS		500	-	Rotax Engine	0,5	BR9ECS	3570			BR9ECSIX	5438
GSX Sport 500 SS		500	-	Rotax Engine	0,5	BR9ECS	3570			BR9ECSIX	5438
Legend Sport 500 SS		500	-	Rotax Engine	0,5	BR9ECS	3570			BR9ECSIX	5438
Legend Sport GT 500 SS		500	-	Rotax Engine	0,5	BR9ECS	3570			BR9ECSIX	5438
MX Z Adrenaline 500 SS		500	-	Rotax Engine	0,5	BR9ECS	3570			BR9ECSIX	5438
MX Z Adrenaline 500 SS (E)		500	-	Rotax Engine	0,5	BR9ECS	3570			BR9ECSIX	5438
MX Z Trail 500 SS		500	-	Rotax Engine	0,5	BR9ECS	3570			BR9ECSIX	5438
MX Z Trail 500 SS (E)		500	-	Rotax Engine	0,5	BR9ECS	3570			BR9ECSIX	5438
503 Formula SL		503	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
503 Skandic SWT		503	-	Rotax Engine	0,5	BR8ES	5422	Q207		BR8EIX	5044
503 Skandic WT503R		503	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
503 Summit 500		503	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
503 Touring SLE		503	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
534 Blizzasd 9700		521	-1983	Rotax Engine	0,5	BR8ES	5422	Q207		BR8EIX	5044
536 Formula Plus/LT		521	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
537 Formula Plus		537	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
Legend Fan 550F		550	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
Legend GT 550F		550	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
MX Z Fan 550F		550	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
Skandic Sport 550F		550	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
Skandic SUV 550F		550	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
Skandic SWT 550F		550	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
Skandic WT 550F		550	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
Summit Fan 550F		550	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
583 Formula Mach I		581	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
582 GT 582		582	-	Rotax Engine	0,4	BR9ES	5722	Q208		BR9EIX	3981
583 Formula STX/STXL/STXLT/Z 583		583	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
583 GT 583		583	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
583 MX-Z 583		583	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
583 MX-Z LI 583		583	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
583 Summit 583		583	-	Rotax Engine	0,5	BR9ES	5722	Q208		BR9EIX	3981
599 Formula III/III LT		599	-	Rotax Engine	0,5	BR10ES	4832			BR10EIX	6801
600 Formula III		600	-	Rotax Engine	0,5	BR10ES	4832			BR10EIX	6801
GSX Limited 600 HO SDI		600	-	Rotax Engine	0,8	BR9ECS	3570			BR9ECSIX	5438

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
BOMBARDIER											
GSX LTD 1+1 600 HO SDI		600	-	Rotax Engine	0,8	BR9ECS	3570		BR9ECSIX	5438	
GSX Sport 1+1 600 HO		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
GSX Sport 1+1 600HO SDI		600	-	Rotax Engine	0,8	BR9ECS	3570		BR9ECSIX	5438	
GSX Sport 600 HO		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
GSX Sport 600 HO SDI		600	-	Rotax Engine	0,8	BR9ECS	3570		BR9ECSIX	5438	
Legend SE 600 HO SDI		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
Legend SE GT 600 HO SDI		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
Legend Sport 600 HO SDI		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
Legend Sport GT 600 HO SDI		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
MXZ Renegade X 600 HO SDI		600	-	Rotax Engine	0,8	BR9ECS	3570		BR9ECSIX	5438	
MXZ X 600 HO		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
MXZ X 600 HO (E)		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
MXZ X 600 HO SDI		600	-	Rotax Engine	0,8	BR9ECS	3570		BR9ECSIX	5438	
MXZ Adrenaline 600 HO		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
MXZ Adrenaline 600 HO (E)		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
MXZ Adrenaline 600 HO SDI		600	-	Rotax Engine	0,8	BR9ECS	3570		BR9ECSIX	5438	
MXZ Adrenaline 600 HO SDI (E)		600	-	Rotax Engine	0,8	BR9ECS	3570		BR9ECSIX	5438	
MXZ Rene. X 600 HO SDI (E)		600	-	Rotax Engine	0,8	BR9ECS	3570		BR9ECSIX	5438	
MXZ Renegade 600 HO		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
MXZ Renegade 600 HO (E)		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
MXZ Renegade X 600 HO		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
MXZ Renegade X 600 HO (E)		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
MXZ Trail 600 HO		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
MXZ Trail 600 HO (E)		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
MXZ X 600 HO SDI (E)		600	-	Rotax Engine	0,8	BR9ECS	3570		BR9ECSIX	5438	
Skandic SUV 600		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
Skandic WT LC 600		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
Summit Adrenaline 600 HO		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
Summit X 600 HO		600	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
640 ER Alpine		635	-	Rotax Engine	0,5	B7HS	5110	Q204	BR7HIX	7067	
640, 640ER		635	-	Rotax Engine	0,5	AB-7	3010				
TNT 640		635	-	Rotax Engine	0,5	AB-7	3010				
TNT 669		669	-	Rotax Engine	0,5	AB-7	3010				
670 Formula SS		670	-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981	
670 GT SE670		670	-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981	
670 Mach 1		670	-	Rotax Engine	0,5	BR10ES	4832		BR10EIX	6801	
670 Summit 670		670	-	Rotax Engine	0,5	BR9ES	5722	Q208	BR9EIX	3981	
699 GT SE		699	-	Rotax Engine	0,4	BR10ES	4832		BR10EIX	6801	
699 Mach 1		699	-	Rotax Engine	0,4	BR10ES	4832		BR10EIX	6801	
Legend SE 700		700	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
Legend SE GT 700		700	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
Legend Sport 700		700	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
Legend Sport GT 700		700	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
TNT775		771	-	Rotax Engine	0,5	AB-8	7909				
779 Mach Z/ZLT		779	-	Rotax Engine	0,5	BR10ES	4832		BR10EIX	6801	
GSX Limited 1+1 800 HO		800	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
GSX Limited 800 HO		800	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
Legend SE 800 SDI		800	-	Rotax Engine	0,8	BR9ECS	3570		BR9ECSIX	5438	
Legend SE GT 800 SDI		800	-	Rotax Engine	0,8	BR9ECS	3570		BR9ECSIX	5438	
MXZ Renegade 800 (E)		800	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
MXZ X Reneg. 800 HO (E)		800	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
MXZ Adrenaline 800 (E)		800	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
BOMBARDIER											
MXZ Adrenaline 800 HO		800	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
MXZ Renegade 800 HO		800	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
MXZ Renegade X 800 HO		800	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
MXZ X 800 HO		800	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
MXZ X 800 HO (E)		800	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
Summit Adrenalin 800 HO		800	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
Summit HM 800 HO		800	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
Summit HM X 800 HO		800	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
Summit HM Xtreme 800 HO		800	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
Summit Sport 800 HO		800	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
Summit X 800 HO		800	-	Rotax Engine	0,5	BR9ECS	3570		BR9ECSIX	5438	
809 Mach Z		809	-	Rotax Engine	0,4	BR10ES	4832		BR10EIX	6801	
Legend SE GT V-1000		1000	-	Rotax Engine	0,8	DCPR8E	4179		DCPR8EIX	6546	
Legend SE V-1000		1000	-	Rotax Engine	0,8	DCPR8E	4179		DCPR8EIX	6546	
BURAN											
PM3-640		640	-	20,6KW	0,7	BP6ES	7811		BPR6EIX	6637	
CANADIAN CURTIS WRIGHT											
KEC 248		248	-		0,6	AB-7	3010				
KEC 290/2, KEC290/3		290	-		0,6	B8HS	5510	Q205	BR8HIX	7001	
KEC 295RS/2		290	-		*	BUE	2322				
KEC 340/2, KEC340/3		339	-		0,6	B8HS	5510	Q205	BR8HIX	7001	
KEC 340/22A		339	-		0,6	B8ES	2411	Q201	BR8EIX	5044	
KEC 340/4		339	-		0,6	B8HS	5510	Q205	BR8HIX	7001	
KEC 340/5		339	-		0,6	B8ES	2411	Q201	BR8EIX	5044	
KEC 340/5A		339	-		0,6	B8ES	2411	Q201	BR8EIX	5044	
KEC 400/2, KEC400/3		398	-		0,6	B8HS	5510	Q205	BR8HIX	7001	
KEC 400/21		398	-		0,6	B8HS	5510	Q205	BR8HIX	7001	
KEC 400/22		398	-		0,6	B8ES	2411	Q201	BR8EIX	5044	
KEC 400/22A		398	-		0,6	B8ES	2411	Q201	BR8EIX	5044	
KEC 400/4		398	-		0,6	B8HS	5510	Q205	BR8HIX	7001	
KEC 440/21		436	-		0,6	B8HS	5510	Q205	BR8HIX	7001	
KEC 440/22		436	-		0,6	B8HS	5510	Q205	BR8HIX	7001	
KEC 440/22A		436	-		0,6	B8HS	5510	Q205	BR8HIX	7001	
KEC 440/3, KEC440/4		436	-		0,6	B8HS	5510	Q205	BR8HIX	7001	
KEC 440/5		436	-		0,6	B8ES	2411	Q201	BR8EIX	5044	
CCW ENGINES											
KEC 248		248	-		0,6	AB-7	3010				
KEC 290		290	-		0,6	B8HS	5510	Q205	BR8HIX	7001	
KEC 290RC/2		290	-		*	BUE	2322				
KEC 340		340	-		0,6	B8HS	5510	Q205	BR8HIX	7001	
KEC 340/22A		340	-		0,6	B8ES	2411	Q201	BR8EIX	5044	
KEC 340/5		340	-		0,6	B8ES	2411	Q201	BR8EIX	5044	
KEC 400		400	-		0,6	B8HS	5510	Q205	BR8HIX	7001	
KEC 400/22		400	-		0,6	B8ES	2411	Q201	BR8EIX	5044	
KEC 440		440	-		0,6	B8HS	5510	Q205	BR8HIX	7001	
KEC 440/5		440	-		0,6	B8ES	2411	Q201	BR8EIX	5044	

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          										
CHAPARRAL										
250		242	-	Xenoah-Engine	0,5	B8ES	2411	Q201	BR8EIX	5044
295		292	-	Xenoah-Engine	0,5	BR7ES	5122		BR7EIX	6664
340		338	-	Xenoah-Engine	0,5	BR7ES	5122		BR7EIX	6664
340 SS		338	-	Xenoah-Engine	0,5	B9ES	2611	Q202	BR9EIX	3981
340 SSX		338	-	Xenoah-Engine	0,5	BR8ES	5422	Q207	BR8EIX	5044
400		394	-	Xenoah-Engine / 19.0mm(3/4") Reach	0,5	B8ES	2411	Q201	BR8EIX	5044
400		398	-	Xenoah-Engine / 12.7mm(1/2") Reach	0,5	B7HS	5110	Q204	BR7HIX	7067
400 SS		400	-	Xenoah-Engine / 12.7mm(1/2") Reach	0,5	B8HS	5510	Q205	BR8HIX	7001
400 SS		400	-	Xenoah-Engine / 19.0mm(3/4") Reach	0,5	B9ES	2611	Q202	BR9EIX	3981
440		438	-	Xenoah-Engine / 12.7mm(1/2") Reach	0,5	B7HS	5110	Q204	BR7HIX	7067
440		438	-	Xenoah-Engine / 19.0mm(3/4") Reach	0,5	BR7ES	5122		BR7EIX	6664
440 SSX		438	-	Xenoah-Engine	0,5	BR8ES	5422	Q207	BR8EIX	5044
440 Racing, 650 Racing		440	-	Xenoah-Engine	*				BR8HIX	7001
440 SS		440	-	Xenoah-Engine / 12.7mm(1/2") Reach	0,5	B8HS	5510	Q205	BR8HIX	7001
440 SS		440	-	Xenoah-Engine / 19.0mm(3/4") Reach	0,5	B9ES	2611	Q202	BR9EIX	3981
ECHO => KIORITZ										
EVINRUDE => OMC										
HIRTH										
110 R		180	-		0,5	AB-7	3010			
60 R		199	-		0,5	AB-7	3010			
81 R, 82 R		246	-		0,5	AB-7	3010			
261 R, 261 R3, 261 R4		292	-		0,5	B8ES	2411	Q201	BR8EIX	5044
56 R, 193 R		292	-		0,5	AB-7	3010			
190, 191 R		300	-		0,5	AB-7	3010			
52 R, 53 R, 54 R, 55 R		300	-		0,5	AB-7	3010			
192 R		317	-		0,5	AB-7	3010			
194 R		338	-		0,5	AB-7	3010			
260 R, 260 R3, 260 R4		338	-		0,5	B8ES	2411	Q201	BR8EIX	5044
160 R, 200 R		372	-		0,5	AB-7	3010			
210 R, 271 RO		399	-		0,5	AB-7	3010			
211 R, 270 R, 273 R		438	-		0,5	AB-7	3010			
180 R, 220 R, 275 R		493	-		0,5	AB-7	3010			
170 R		600	-		0,5	AB-7	3010			
171 R		634	-		0,5	AB-7	3010			
231 R		647	-		0,5	B8HS	5510	Q205	BR8HIX	7001
280 R		649	-		0,5	B8ES	2411	Q201	BR8EIX	5044
172 R		650	-		0,5	AB-7	3010			
281 RO		650	-		0,5	B8ES	2411	Q201	BR8EIX	5044
230 R		793	-		0,5	B8HS	5510	Q205	BR8HIX	7001
IKAR										
PM3-320		320	-	11,8kW	0,7	BP6ES	7811		BPR6EIX	6637
ILO-ROCKWELL										
L 99		100	-		0,5	B6HS	3115	Q203	BR6HIX	3419
L152		148	-		0,5	AB-6	2910			

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren

* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap





ILO-ROCKWELL

L197		192	-		0,5	AB-6	2910			
L 227, L 230		223	-		0,5	AB-7	3010			
L 252		257	-		0,5	AB-6	2910			
2F 295		285	-		0,5	B8ES	2411	Q201	BR8EIX	5044
L 292, L 295		292	-		0,5	AB-7	3010			
R 295, L 295/70		292	-		0,5	B8ES	2411	Q201	BR8EIX	5044
L 297, L 300		296	-		0,5	AB-7	3010			
2F 340		337	-		0,5	B8ES	2411	Q201	BR8EIX	5044
L 340		337	-		0,5	AB-7	3010			
R 340, L 340/70, LR 340/2		337	-		0,5	B8ES	2411	Q201	BR8EIX	5044
L 372, L 380		372	-		0,5	AB-7	3010			
L 395		396	-		0,5	AB-7	3010			
L 399/2, LR 399/2, LR 400/2		398	-		0,5	B8ES	2411	Q201	BR8EIX	5044

JOHN DEERE

TA 340 A		339	-	Kawasaki Engine	0,8	BR8ES	5422	Q207	BR8EIX	5044
TA 340A-D202		339	-	Kawasaki Engine	0,8	BR8ES	5422	Q207	BR8EIX	5044
TA 340A-F202		339	-	Kawasaki Engine	0,8	BR8ES	5422	Q207	BR8EIX	5044
TB 340A-A202		339	-	Kawasaki Engine	0,8	BR8ES	5422	Q207	BR8EIX	5044
TB 340A-C202		339	-	Kawasaki Engine	0,8	BR8ES	5422	Q207	BR8EIX	5044
All 1981 Models		436	-	Kawasaki Engine	0,8	BR9ES	5722	Q208	BR9EIX	3981
TA 440A		436	-	Kawasaki Engine	0,8	BR8ES	5422	Q207	BR8EIX	5044
TA 440A-D202		436	-	Kawasaki Engine	0,8	BR8ES	5422	Q207	BR8EIX	5044
TA 440A-F202		436	-	Kawasaki Engine	0,8	BR8ES	5422	Q207	BR8EIX	5044
TA 440B-C202		436	-	Kawasaki Engine	0,8	BR9ES	5722	Q208	BR9EIX	3981
TA 440B-E202(436	-	Kawasaki Engine	0,8	BR9ES	5722	Q208	BR9EIX	3981
TC 440A-C202		436	-	Kawasaki Engine	0,8	BR9ES	5722	Q208	BR9EIX	3981
TC 440A-E202		436	-	Kawasaki Engine	0,8	BR9ES	5722	Q208	BR9EIX	3981
KEC 295RS/2		290	-	Kioritz Engine	0,6	B10ES	7928		BR10EIX	6801
KEC 340/22A		339	-	Kioritz Engine/ Capasitor discharge ignition	0,6	B10ES	7928		BR10EIX	6801
KEC 340/22A		339	-	Kioritz Engine/ Ignition Type Magneto	0,6	B8ES	2411	Q201	BR8EIX	5044
KEC 340/22B, -22C		339	-	Kioritz Engine	0,6	B10ES	7928		BR10EIX	6801
KEC 340/23ALC, -23BLC		339	-	Kioritz Engine	0,6	B10ES	7928		BR10EIX	6801
KEC 340/23LC		339	-	Kioritz Engine	0,6	B10ES	7928		BR10EIX	6801
KEC 340/5A		339	-	Kioritz Engine	0,6	B8ES	2411	Q201	BR8EIX	5044
KEC 340RS/2		339	-	Kioritz Engine	0,6	B10ES	7928		BR10EIX	6801
KEC 340RS/24LC		339	-	Kioritz Engine	0,6	B10ES	7928		BR10EIX	6801
KEC 440/22A		436	-	Kioritz Engine / Capasitor discharge ignition	0,6	B10ES	7928		BR10EIX	6801
KEC 440/22A		436	-	Kioritz Engine/ Ignition Type Magneto	0,6	B8ES	2411	Q201	BR8EIX	5044
KEC 440/22B-22C		436	-	Kioritz Engine	0,6	B10ES	7928		BR10EIX	6801
KEC 440/23AL, -23BLC		436	-	Kioritz Engine	0,6	B10ES	7928		BR10EIX	6801
KEC 440/23LC		436	-	Kioritz Engine	0,6	B10ES	7928		BR10EIX	6801

KAWASAKI

TA 340A		340	-	Snowmobile Engine	0,8	BR8ES	5422	Q207	BR8EIX	5044
TA 340A-A201		340	-	Snowmobile Engine	0,8	BR8ES	5422	Q207	BR8EIX	5044
TA 340A-D201		340	-	Snowmobile Engine	0,8	BR8ES	5422	Q207	BR8EIX	5044
TA 340C-D203		340	-	Snowmobile Engine	0,7	BR9ES	5722	Q208	BR9EIX	3981

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          										
KAWASAKI										
TC 340A		340	-	Snowmobile Engine	*				BR9EIX	3981
TC 340A-C201		340	-	Snowmobile Engine	*				BR9EIX	3981
TA 440A		440	-	Snowmobile Engine	0,8	BR8ES	5422	Q207	BR8EIX	5044
TA 440B		440	-	Snowmobile Engine	*				BR9EIX	3981
TA 440B-C201		440	-	Snowmobile Engine	*				BR9EIX	3981
TA 440C		440	-	Snowmobile Engine	*				BR9EIX	3981
TA 440C-C201		440	-	Snowmobile Engine	*				BR9EIX	3981
TA 440C-D203		440	-	Snowmobile Engine	*				BR9EIX	3981
TA 440C-D210		440	-	Snowmobile Engine	*				BR9EIX	3981
TC 440A		440	-	Snowmobile Engine	*				BR9EIX	3981
TC 440A-C201		440	-	Snowmobile Engine	*				BR9EIX	3981
TC 440C-A201		440	-	Snowmobile Engine	*				BR9EIX	3981
TC 440D-A201		440	-	Snowmobile Engine	*				BR9EIX	3981
TC 440D-A204		440	-	Snowmobile Engine	*				BR9EIX	3981
TC 530D-B201		530	-	Snowmobile Engine	*				BR9EIX	3981
KIORITZ (ECHO)										
KEC 295RS		290	-		*	BUE	2322			
KEC 340/22A		339	-	Capasitor discharge ignition	*	BUE	2322			
KEC 340/22A		339	-	Ignition Magneto	0,6	B8ES	2411	Q201	BR8EIX	5044
KEC 340/22B		339	-	Capasitor discharge ignition	*				BR10EIX	6801
KEC 340/23LC, 23ALC, 23BLC		339	-		*				BR10EIX	6801
KEC 340/5A		339	-		0,6	B8ES	2411	Q201	BR8EIX	5044
KEC 340RS/2		339	-		*	BUE	2322			
KEC 340RS/24LC		339	-		*	BUE	2322			
KEC 440/22A		436	-	Capasitor discharge ignition	*	BUE	2322			
KEC 440/22A		436	-	Ignition Magneto	0,6	B8ES	2411	Q201	BR8EIX	5044
KEC 440/22B		436	-	Capasitor discharge ignition	*				BR10EIX	6801
KEC 440/23LC, -23ALC, -23BLC		436	-		*				BR10EIX	6801
KOHLER										
K 141, K161, K181(4 Cycle)			-		0,5	B6S	3510	Q302		
K 250-1AM		220	-		0,5	B8ES	2411	Q201	BR8EIX	5044
K 250-RLC		250	-		*	BUE	2322			
K 295-2, K295-2AX		290	-		0,5	B8ES	2411	Q201	BR8EIX	5044
K 295-2SS		290	-		0,5	B10ES	7928		BR10EIX	6801
K 295-2T		292	-		0,5	B8ES	2411	Q201	BR8EIX	5044
K 295-1, K295-1T		294	-		0,5	AB-7	3010			
K 309-1, K309-1T		309	-		0,5	AB-7	3010			
K 335-1, K335-1T		335	-		0,5	AB-7	3010			
K 340-2, K340-2T		338	-		0,5	B8HS	5510	Q205	BR8HIX	7001
K 340-2AX		338	-		0,5	B8ES	2411	Q201	BR8EIX	5044
K 340-2FA		338	-		0,5	BR8ES	5422	Q207	BR8EIX	5044
K 340-2SS		338	-		0,5	B10ES	7928		BR10EIX	6801
K 340-2AS, -2RS, -RLC		339	-		*	BUE	2322			
SK 340-2AX		339	-		*	BUE	2322			
K 399-2, -2T		398	-		0,5	AB-7	3010			
K 399-2AX, RK399-2AX		398	-		0,5	B9ES	2611	Q202	BR9EIX	3981
K 400-2RS		398	-		*	BUE	2322			
K 440-2SS		429	-	12.7mm(1/2") Reach	0,5	B9HS	5810		BR9HIX	5687
K 440-2SS		429	-	19.0mm(3/4") Reach	0,5	B10ES	7928		BR10EIX	6801

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren









* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



			C						Stock-No	Quick-No		Stock-No
KOHLER												
K 440-3RS		429		-	12.7mm(1/2") Reach	0,5	B9HS	5810		BR9HIX	5687	
K 440-3RS		429		-	19.0mm(3/4") Reach	0,5	B10ES	7928		BR10EIX	6801	
K 440-2		436		-		0,5	AB-7	3010				
K 440-2AM		436		-		0,5	B9ES	2611	Q202	BR9EIX	3981	
K 440-2AM		436		-	Capasitor discharge ignition	*	BUE	2322				
K 440-2AS, -2RS, -RLC		436		-		*	BUE	2322				
K 440-2AX		436		-		0,5	B8ES	2411	Q201	BR8EIX	5044	
K 440-2T		436		-		0,5	AB-7	3010				
RK 440-2T		436		-		0,5	AB-8	7909				
SK 440-2LC		436		-		*	BUE	2322				
K 539-2		539		-		0,5	AB-7	3010				
K 618-2		618		-		0,5	AB-7	3010				
K 645-3RS		645		-	12.7mm(1/2") Reach	0,5	B9HS	5810		BR9HIX	5687	
K 645-3RS		645		-	19.0mm(3/4") Reach	0,5	B10ES	7928		BR10EIX	6801	
K 645-3SS		645		-	12.7mm(1/2") Reach	0,5	B9HS	5810		BR9HIX	5687	
K 645-3SS		645		-	19.0mm(3/4") Reach	0,5	B10ES	7928		BR10EIX	6801	
MONARK CRESCENT												
380				-		0,5	AB-8	7909				
MOTO-SKI => BOMBARDIER												
NPO SATURN												
Taiga		500		-		0,5	BR9ES	5722	Q208	BR9EIX	3981	
OCKELBO												
MAG 2034				-		0,5	B7ES	1111		BR7EIX	6664	
Sachs Wankel KM914				-		0,5	B6HS	3115	Q203	BR6HIX	3419	
Sachs SA280		280		-		0,5	AB-6	2910				
Sachs SA290		290		-		0,5	AB-7	3010				
Sachs SA290SS		290		-		0,5	B8HS	5510	Q205	BR8HIX	7001	
JLO LR340/2		340		-		0,5	B8ES	2411	Q201	BR8EIX	5044	
Sachs SA340		340		-		0,5	AB-8	7909				
Sachs SA340RX		340		-		0,5	B9ES	2611	Q202	BR9EIX	3981	
JLO 2F-400		400		-		0,5	B7ES	1111		BR7EIX	6664	
Rotax Ockelbo 400		400		-		0,5	B7ES	1111		BR7EIX	6664	
Rotax Ockelbo 600, 800, 8000		600		-		0,5	B8ES	2411	Q201	BR8EIX	5044	
OMC												
With CDI System				-	JOHNSON-EVINRUDE		BUHX	2522				
M 215		362		-	JOHNSON-EVINRUDE	0,8	B-4	3210				
M 228		399		-	JOHNSON-EVINRUDE	0,8	B6S	3510	Q302			
M 232, M 232E, M 235, M 237		399		-	JOHNSON-EVINRUDE	0,8	B8S	3810				
M 225, M 225C		437		-	JOHNSON-EVINRUDE	0,8	B6S	3510	Q302			
M 226E, M 226W, M 231E, M 231W		437		-	JOHNSON-EVINRUDE	0,8	B6S	3510	Q302			
M 227		437		-	JOHNSON-EVINRUDE	0,8	B7S	3710				
M 229E, M 229W, M 230, M2 30E		437		-	JOHNSON-EVINRUDE	0,8	B8S	3810				
M 233, M 233E, M 234E, M 236		437		-	JOHNSON-EVINRUDE	0,8	B8S	3810				
M 238, M 239E, M 241E, M 245		437		-	JOHNSON-EVINRUDE	0,8	B8S	3810				

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
POLARIS											
INDY FRONTIER	S02NT7DS		2	2002-		0,7	BKR7E	6097		BKR7EIX	2667
FST IQ CRUISER			2	2007-		0,9	PFR7G-9	4371			
FST IQ LX			2	2007-		0,9	PFR7G-9	4371			
FST IQ SWITCHBACK			2	2007-		0,9	PFR7G-9	4371			
DRAGON RMK/INTL			2	2007-		0,6	BR10EG	3830			
FST SWITCHBACK			2	2006-		0,9	PFR7G-9	4371			
FRONTIER CLASSIC	S04ND7DS		2	2004-		0,7	BKR7E	6097		BKR7EIX	2667
FRONTIER CLASSIC	S03ND7DS		2	2003-	--> 01/01/2002	0,7	BKR7E	6097		BKR7EIX	2667
FRONTIER TOURING	S04NT7DS		2	2004-		0,7	BKR7E	6097		BKR7EIX	2667
FRONTIER TOURING	S03NT7DS		2	2003-		0,7	BKR7E	6097		BKR7EIX	2667
FRONTIER TOURING	S05NT7DS/DE		2	2005-		0,7	BKR7E	6097		BKR7EIX	2667
FS CLASSIC			2	2006-		0,7	BKR7E	6097		BKR7EIX	2667
FS TOURING			2	2006-		0,7	BKR7E	6097		BKR7EIX	2667
FST CLASSIC			2	2006-		0,9	PFR7G-9	4371			
FST TOURING			2	2006-		0,9	PFR7G-9	4371			
WIDETRAK LX			2	2010-		0,8	BR8ES	5422	Q207	BR8EIX	5044
WIDETRAK LX / EURO			2	2008-2009		0,8	BR8ES	5422	Q207	BR8EIX	5044
WIDETRAK LX / INTL			2	2011-2014		0,8	BR8ES	5422	Q207	BR8EIX	5044
120 INDY / INTL		120	1	2014-		0,9	BR6ES	4922			
120 PRO / INTL		120	1	2012-		0,9	BR6ES	4922			
120 PRO-R / INTL		120	1	2013-		0,9	BR6ES	4922			
120		120	1	2007-		0,9	BR6ES	4922			
120 / EURO		120	1	2009-		0,9	BR6ES	4922			
120 ASSAULT / INTL		120	1	2011-		0,9	BR6ES	4922			
120 DRAGON / EURO		120	1	2008-		0,9	BR6ES	4922			
120 DRAGON / INTL		120	1	2010-		0,9	BR6ES	4922			
120 PRO X		120	1	2006-		0,9	BR6ES	4922			
120 PRO X	S04WB1AS	120	1	2004-		0,9	BR6ES	4922			
120 PRO X	S05WB1AS	120	1	2005-		0,9	BR6ES	4922			
120 XC SP	S01WB1AS	120	1	2001-		0,9	BR6ES	4922			
120 XC SP	S02WB1AS	120	1	2002-		0,9	BR6ES	4922			
120 XC SP	S03WB1AS	120	1	2003-		0,9	BR6ES	4922			
120 XCR	S00WB1AS	120	1	2000-2000		0,9	BR6ES	4922			
EC16P		164		-		0,5	B7ES	1111		BR7EIX	6664
EC16P		164		-		0,4	B7ES	1111		BR7EIX	6664
EC17P		175		-		0,5	B7ES	1111		BR7EIX	6664
EC17P		175		-		0,4	B7ES	1111		BR7EIX	6664
EC17PM		175		-		0,4	B7ES	1111		BR7EIX	6664
EC25PC		244		-		0,5	B9ES	2611	Q202	BR9EIX	3981
EC25PM-01		244		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC25PM-01		244		-		0,5	BR8ES	5422	Q207	BR8EIX	5044
EC25PS		244		-		0,5	BR8ES	5422	Q207	BR8EIX	5044
EC25PT		244		-		0,5	B9ES	2611	Q202	BR9EIX	3981
EC25PT-04		244		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC25PT-05		244		-		0,5	B10ES	7928		BR10EIX	6801
EC25PT-06		244		-		0,5	B9ES	2611	Q202	BR9EIX	3981
EC25PT-07		244		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC25		250		-		0,6	BR8ES	5422	Q207	BR8EIX	5044
EC25PC		250		-		0,5	B9ES	2611	Q202	BR9EIX	3981
EC25PT		250		-		0,5	B9ES	2611	Q202	BR9EIX	3981
EC25PT-04		250		-		0,5	B8ES	2411	Q201	BR8EIX	5044
EC25PT-05		250		-		0,5	B10ES	7928		BR10EIX	6801

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren








* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



<div>        <div> <div>Stock-No</div> <div>Quick-No</div> <div>PRIMA</div> <div>Stock-No</div> </div> </div>											
POLARIS											
EC25PT-06		250		-		0,5	B9ES	2611	Q202	BR9EIX	3981
EC25PT-07		250		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
EC29P		294		-		0,5	B7ES	1111		BR7EIX	6664
EC29P		294		-		0,5	B7ES	1111		BR7EIX	6664
EC29PF		294		-		0,5	B7ES	1111		BR7EIX	6664
EC29PF		294		-		0,5	B7ES	1111		BR7EIX	6664
EC29PM		294		-		0,5	B7ES	1111		BR7EIX	6664
EC29PM		294		-		0,5	B7ES	1111		BR7EIX	6664
EC29PS		294		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC29PS		294		-		0,5	B8ES	2411	Q201	BR8EIX	5044
EC34-2P-03		333		-		0,6	BR9ES	5722	Q208	BR9EIX	3981
EC34PL-01		333		-		0,5	B9ES	2611	Q202	BR9EIX	3981
EC34PL-01		333		-		0,5	B9ES	2611	Q202	BR9EIX	3981
EC34PL-02		333		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC34PL-02		333		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
EC34PL-03		333		-		0,5	B10ES	7928		BR10EIX	6801
EC34PL-04		333		-		0,5	B10ES	7928		BR10EIX	6801
EC34PL-05		333		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC34PL-05		333		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
EC34PM-03		333		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC34PM-03		333		-		0,5	BR8ES	5422	Q207	BR8EIX	5044
EC34PM-04		333		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC34PM-04		333		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
EC34PM-04-N		333		-		0,5	B8ES	2411	Q201	BR8EIX	5044
EC34PM-04-N		333		-		0,5	B8ES	2411	Q201	BR8EIX	5044
EC34-2P-02		335		-		0,6	BR9ES	5722	Q208	BR9EIX	3981
EC34-2PM-01		335		-		0,6	BR9ES	5722	Q208	BR9EIX	3981
EC34P		335		-		0,5	B7ES	1111		BR7EIX	6664
EC34P		335		-		0,5	B7ES	1111		BR7EIX	6664
EC34PC		335		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC34PF		335		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC34PF		335		-		0,5	B8ES	2411	Q201	BR8EIX	5044
EC34PQ		335		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC34PR-06		335		-		0,5	B10ES	7928		BR10EIX	6801
EC34PS		335		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC34PS		335		-		0,5	B8ES	2411	Q201	BR8EIX	5044
EC34PT-04		335		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC34PT-04		335		-		0,5	B8ES	2411	Q201	BR8EIX	5044
EC34PT-05		335		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC34PT-05		335		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
EC34PT-06		335		-		0,5	B10ES	7928		BR10EIX	6801
EC34PT-06		335		-		0,5	B10ES	7928		BR10EIX	6801
EC34PT-07		335		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC34PT-07		335		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
EC34PC		336		-		0,5	B8ES	2411	Q201	BR8EIX	5044
EC34PQ		336		-		0,5	B8ES	2411	Q201	BR8EIX	5044
EC34-2PM-02		339		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC34-2PME-02		339		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
340		340	1	2008-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 CLASSIC	S05ND3AS	340	1	2005-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 CLASSIC		340	1	2006-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 EDGE LX		340	1	2007-		0,8	BR8ES	5422	Q207	BR8EIX	5044

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
POLARIS											
340 EDGE TOURING		340	1	2007-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 EDGE/EDGE CLASSIC	S03NB3AS/	340	1	2003-		0,8	BR8ES	5422	Q207	BR8EIX	5044
	S03ND3AS										
340 INDY	099LB3AS	340	1	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 INDY DELUXE	099LD3AS	340	1	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 INDY DELUXE	S00LD3AS	340	1	2000-2000		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 INDY DELUXE	S01LD3AS	340	1	2001-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 INDY DELUXE	S02LD3AS	340	1	2002-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 INDY TOURING	099LT3AS	340	1	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 INDY TOURING	S00LT3AS	340	1	2000-2000		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 INDY TOURING	S01LT3AS	340	1	2001-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 INDY TOURING	S02LT3AS	340	1	2002-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 INDY TOURING	S03LT3AS	340	1	2003-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 INDY/INT'L/CLASSIC	S04NB3AS	340	1	2004-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE	0923033	340	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE	0933433	340	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE	0943433	340	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE	0953433	340	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE	0963433	340	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE	0973433	340	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE	0983433	340	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE DELUXE	0923231	340	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE DELUXE	0933431	340	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE DELUXE	0943431	340	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE DELUXE	0953431	340	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE DELUXE	0963431	340	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE DELUXE	0973431	340	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE DELUXE	0983431	340	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE EUROPEAN	E943433	340	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE EUROPEAN	E963433	340	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE GT FINLAND	F923133	340	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE GT	0923133	340	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE GT	0933133	340	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE GT	0943133	340	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE GT	0953133	340	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE GT	0963133	340	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE GT	0973133	340	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE GT EUROPEAN	E943133	340	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE GT EUROPEAN	E953133	340	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE GT EUROPEAN	E963133	340	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE GT EUROPEAN	E973133	340	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE GT SWE	S923133	340	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE SWE	S923033	340	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE TOURING	0983133	340	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 LITE TOURING EUROPEAN	E983133	340	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 STAR LITE	0923027	340	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 STAR LITE	0933427	340	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 STAR LITE	0943427	340	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 STAR LITE	0953427	340	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 STAR LITE GT	0933127	340	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 STAR LITE GT	0943127	340	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 STAR LITE SWE	S923027	340	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren


* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



											
POLARIS											
340 TOURING		340	1	2006-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 TOURING/INT'L	T3AS/AE	340	1	2004-		0,8	BR8ES	5422	Q207	BR8EIX	5044
340 TRANSPORT/EURO		340	1	2008-		0,8	BR8ES	5422	Q207	BR8EIX	5044
EC37P		372		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC37P		372		-		0,5	B8ES	2411	Q201	BR8EIX	5044
EC40P		398		-		0,5	B7ES	1111		BR7EIX	6664
EC40P		398		-		0,5	B7ES	1111		BR7EIX	6664
EC40P-03		398		-		0,6	BR9ES	5722	Q208	BR9EIX	3981
EC40PL-01		398		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC40PL-01		398		-		0,6	BR9ES	5722	Q208	BR9EIX	3981
EC40PL-02/04		398		-		0,6	BR8ES	5422	Q207	BR8EIX	5044
EC40PM		398		-		0,5	B7ES	1111		BR7EIX	6664
EC40PM		398		-		0,5	B7ES	1111		BR7EIX	6664
EC40PS		398		-		0,5	B10ES	7928		BR10EIX	6801
EC40PS		398		-		0,5	B10ES	7928		BR10EIX	6801
EC34-2PM-02		432		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC44-2PM-1100		432		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC44-2PM-1100		432		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
EC44-2PM-2100		432		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC44-2PM-2100		432		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
EC44-2PM-3100		432		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC44-2PM-3100		432		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
EC44-2PM-3300		432		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC44-2PM-3300		432		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
EC44-2PM-4100		432		-		0,6	BR9ES	5722	Q208	BR9EIX	3981
EC44-2PM-5000		432		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC44-2PM-5000		432		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
EC44-2PM-5100		432		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC44-2PM-5100		432		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
EC44-3PM-01		432		-		0,6	BR8ES	5422	Q207	BR8EIX	5044
EC44P		432		-		0,5	B7ES	1111		BR7EIX	6664
EC44PM-01		432		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC44PM-01		432		-		0,5	BR8ES	5422	Q207	BR8EIX	5044
EC44PM-02		432		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC44PM-02		432		-		0,5	BR8ES	5422	Q207	BR8EIX	5044
EC44PM-03		432		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC44PM-03		432		-		0,5	BR8ES	5422	Q207	BR8EIX	5044
EC44PQ		432		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC44PQ		432		-		0,5	B8ES	2411	Q201	BR8EIX	5044
EC44PT		432		-		0,5	B10ES	7928		BR10EIX	6801
EC44PT		432		-		0,5	B10ES	7928		BR10EIX	6801
EC44PT-04		432		-		0,5	B10ES	7928		BR10EIX	6801
EC44PT-04		432		-		0,5	B10ES	7928		BR10EIX	6801
EC44PT-05		432		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC44PT-05		432		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
EC44PT-06		432		-		0,5	B9ES	2611	Q202	BR9EIX	3981
EC44PT-06		432		-		0,5	B9ES	2611	Q202	BR9EIX	3981
EC44P		436		-		0,5	B7ES	1111		BR7EIX	6664
EC44PS		436		-		0,5	B10ES	7928		BR10EIX	6801
EC45PL-01		436		1999-		0,5	B10ES	7928		BR10EIX	6801
EC45PL-07		439		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC45PL-08		439		-		0,6	BR9ES	5722	Q208	BR9EIX	3981

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
POLARIS											
EC45PL-08		439		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC45PL-09		439		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC45PL-09		439		-		0,6	BR8ES	5422	Q207	BR8EIX	5044
440 INDY	0982760	440	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 IQ		440	2	2006-		0,6	BR10EG	3830			
440 IQ	05MX4CS	440	2	2005-		0,6	BR10EG	3830			
440 IQ / EURO		440	2	2007-		0,6	BR10EG	3830			
440	0920760	440	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 L/C	0930760	440	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 L/C	0942760	440	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 L/C	0952760	440	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 L/C	0962760	440	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 L/C	0972760	440	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 EUROPEAN	E930760	440	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 EUROPEAN	E942760	440	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 PRO X	S01NX4CS	440	2	2001-		0,6	BR10EG	3830			
440 PRO X	S02NX4CS	440	2	2002-		0,6	BR10EG	3830			
440 PRO X	S03NX4CS	440	2	2003-		0,6	BR10EG	3830			
440 PRO X FAN COOLED	S02NX4FS	440	2	2002-		0,7	BR9ES	5722	Q208	BR9EIX	3981
440 PRO X FAN COOLED	S03NX4FS	440	2	2003-		0,7	BR9ES	5722	Q208	BR9EIX	3981
440 PRO XR	S04NX4CS	440	2	2004-		0,6	BR10EG	3830			
440 SKS	0930560	440	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SKS	0942560	440	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SKS	0952560	440	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SKS EUROPEAN	E930560	440	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SKS EUROPEAN	E942560	440	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SKS EUROPEAN	E952560	440	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT	0920443	440	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT	0930443	440	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT	0940443	440	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT	0950443	440	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT	0960443	440	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT	0970443	440	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT	0980443	440	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT	099SB4DS	440	2	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT EUROPEAN	E930443	440	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT EUROPEAN	E970443	440	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT GT	0922443	440	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT GT SWE	S922443	440	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT SKS	0940243	440	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT SKS EUROPEAN	E940243	440	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT SWE	S920443	440	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT TOURING	0950243	440	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT TOURING	0960243	440	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT TOURING	0970243	440	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT TOURING	0980243	440	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT TOURING	099ST4DS	440	2	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT TOURING EUROPEAN	E950243	440	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT TOURING EUROPEAN	E960243	440	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT TOURING EUROPEAN	E970243	440	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SPORT LITE	S00LB4AS	440	2	2000-2000		0,7	BR9ES	5722	Q208	BR9EIX	3981
440 SUPER SPORT	0940743	440	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren


* Please adjust the groundelectrode gap

* Veuillez vérifier l' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



											
POLARIS											
440 SUPER SPORT	0950743	440	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SUPER SPORT	0960743	440	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SUPER SPORT EUROPEAN	E940743	440	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 SWE	S920760	440	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 TRANSPORT	0960143	440	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 TRANSPORT	0970143	440	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 TRANSPORT	0980143	440	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 TRANSPORT	099SU4DS	440	2	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 TRANSPORT EUROPEAN	E960143	440	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 TRANSPORT EUROPEAN	E970143	440	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 TRANSPORT EUROPEAN	E980143	440	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 XC	0971760	440	2	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
440 XC SP	00NX4CS]	440	2	2000-2000		0,6	BR10EG	3830			
440 XCF	0971643	440	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 XCF	0981643	440	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
440 XCF	099SP4AS	440	2	1999-		0,7	BR9ES	5722	Q208	BR9EIX	3981
440 XCR	0921760	440	2	1992-		0,7	BR9ES	5722	Q208	BR9EIX	3981
440 XCR	0931760	440	2	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
440 XCR	0941760	440	2	1994-		0,7	BR9ES	5722	Q208	BR9EIX	3981
440 XCR	0951660	440	2	1995-		0,7	BR9ES	5722	Q208	BR9EIX	3981
440 XCR	0961660	440	2	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
440 XCR	0971660	440	2	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
440 XCR	0981660	440	2	1998-		0,7	BR9ES	5722	Q208	BR9EIX	3981
440 XCR	099SX4CS	440	2	1999-		0,7	BR9ES	5722	Q208	BR9EIX	3981
440 XCR EUROPEAN	E931760	440	2	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
440 XCR SP	0941660	440	2	1995-		0,7	BR9ES	5722	Q208	BR9EIX	3981
440 XCR SP	0951660	440	2	1995-		0,7	BR9ES	5722	Q208	BR9EIX	3981
440 XCR SP	0961760	440	2	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
440 XCR SP	099NX4CS	440	2	1999-		0,6	BR10EG	3830			
440 XCR SWE	S921760	440	2	1992-		0,7	BR9ES	5722	Q208	BR9EIX	3981
450 XCF EDGE	00NX4FS	450	2	2000-2000		0,7	BR9ES	5722	Q208	BR9EIX	3981
450 XCF SP	099SX4FS	450	2	1999-		0,7	BR9ES	5722	Q208	BR9EIX	3981
450 XCF SP EDGE	S01NX4FS	450	2	2001-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC50P		488		-		0,5	B7ES	1111		BR7EIX	6664
EC50P		488		-		0,5	B7ES	1111		BR7EIX	6664
EC50PL-01		488		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC50PL-01/02/04/05/06/		488		-		0,6	BR8ES	5422	Q207	BR8EIX	5044
EC50PL-02		488		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC50PL-03		488		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC50PL-16/17/18/19/20		488		-		0,6	BR8ES	5422	Q207	BR8EIX	5044
EC50PM-01/02/03/04/05/06		488		-		0,6	BR8ES	5422	Q207	BR8EIX	5044
EC5-PM-01		488		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC5-PM-02		488		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC5-PM-03		488		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
500 INDY	0972764	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 INDY EUROPEAN	E972764	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 INDY	0982764	500	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 INDY	0982764A	500	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 INDY	0982764B	500	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 INDY EUROPEAN	E982764A	500	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 INDY	099EB4BS	500	2	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 INDY	99EB4BSA	500	2	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
POLARIS											
500 INDY	S00SB4BS	500	2	2000-2000		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 INDY	S01NB4BS	500	2	2001-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 INDY	S02NB4BS	500	2	2002-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 INDY		500	2	2006-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 INDY	S05NB4BS	500	2	2005-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CARB RMK	0962964	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 RMK	0972564	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 RMK EUROPEAN	E972564	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 RMK	0972964	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 RMK EUROPEAN	E972964	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 RMK	0982964	500	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 RMK EUROPEAN	E982964	500	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 RMK	099ER4BS	500	2	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 RMK	S00SR5AS	500	2	2000-2000		0,7	BR9ES	5722	Q208	BR9EIX	3981
500 RMK 136	S01SR5AS	500	2	2001-		0,7	BR9ES	5722	Q208	BR9EIX	3981
500 RMK 136	S02SR5AS	500	2	2002-		0,7	BR9ES	5722	Q208	BR9EIX	3981
500 TRAIL RMK	0980961	500	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL RMK	0980961	500	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CARB	0952764	500	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CARB	0962764	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CARB SKS	0962564	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CARB SKS EUROPEAN	E962564	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500	0920764	500	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC	0920865	500	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC	0930864	500	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC	0942865	500	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC	0952865	500	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC	0963865	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC	0973865	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC	0983865	500	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC	099ED4BS	500	2	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC	S00SD4BS	500	2	2000-2000		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC	S01SD4BS	500	2	2001-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC	S02ND4BS	500	2	2002-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC	S03ND5CS	500	2	2003-		0,6	BR10EG	3830			
500 CLASSIC	S04ND4BS	500	2	2004-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC	S05ND4BS	500	2	2005-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC		500	2	2006-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC EUROPEAN	E930864	500	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC EUROPEAN	E942865	500	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC TOURING	0930865	500	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC TOURING	0942875	500	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC TOURING	0963365	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC TOURING	0973365	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC TOURING	0983365	500	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC TOURING	099ET4BS	500	2	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC TOURING	S00ST4BS	500	2	2000-2000		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC TOURING	S01ST4BS	500	2	2001-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC TOURING	S02ST4BS	500	2	2002-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC TOURING	S03ST4BS	500	2	2003-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC TOURING EUROPEAN	E930865	500	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC TOURING EUROPEAN	E942875	500	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren

* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



POLARIS											
500 CLASSIC TOURING EUROPEAN	E963365	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC TOURING EUROPEAN	E973365	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 CLASSIC TOURING EUROPEAN	E983365	500	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EDGE	S04NB4BS	500	2	2003-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EDGE	S04NB4BS	500	2	2004-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EFI	0930674	500	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EFI	0942774	500	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EFI	0952774	500	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EFI	0963774	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EFI	0973774	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EFI EUROPEAN	E930674	500	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EFI EUROPEAN	E942774	500	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EFI EUROPEAN	E963774	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EFI SKS	0930574	500	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EFI SKS	0942574	500	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EFI SKS	0952574	500	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EFI SKS	0962574	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EFI SKS EUROPEAN	E942574	500	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EFI SKS EUROPEAN	E952574	500	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EFI SKS EUROPEAN	E962574	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 EFI SKS PDL TRK	0952974	500	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 SKS	0920574	500	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 SKS	0952574	500	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 SKS	0972564	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 SKS EUROPEAN	E930574	500	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 SKS EUROPEAN	E972564	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 SKS EURO	E00SS5AU	500	2	2000-2000		0,7	BR9ES	5722	Q208	BR9EIX	3981
500 SKS EURO	S01SS5AU	500	2	2001-		0,7	BR9ES	5722	Q208	BR9EIX	3981
500 SKS EURO	S02SS5AE	500	2	2002-		0,7	BR9ES	5722	Q208	BR9EIX	3981
500 SKS FINLAND	F920574	500	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 SKS SWE	S920574	500	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 SP	X920674	500	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 SP EFI	0920674	500	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 SP SWE	S920674	500	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 SPX	0920674N	500	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 SUPERSPORT	0970761	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 SUPERSPORT	0980761	500	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 SUPERTRAK	0920161	500	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 SUPERTRAK SWE	S920161	500	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL	0920761	500	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL	0930761	500	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL	0940761	500	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL	0952761	500	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL	0962761	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL	0972761	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL	0982761	500	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL	099EB4ES	500	2	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL	99EB4ESA	500	2	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL DELUXE	0920262	500	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL DELUXE	0930262	500	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL DELUXE	0940262	500	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL DELUXE	0950262	500	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
POLARIS											
500 TRAIL DELUXE EUROPEAN	E930262	500	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL DELUXE EUROPEAN	E940262	500	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL DELUXE EUROPEAN	E950262	500	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL EUROPEAN	E930761	500	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL EUROPEAN	E952761	500	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL EUROPEAN	E972761	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL TOURING	0960262	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL TOURING	0982362	500	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL TOURING	0972262	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL TOURING	99ET4ES	500	2	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL TOURING	9ET4ESA	500	2	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL TOURING EUROPEAN	E960262	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL TOURING EUROPEAN	E972262	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 TRAIL TOURING EUROPEAN	E982362	500	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK	0922064	500	2	1992-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK	0932064	500	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK EUROPEAN	E932064	500	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK GT	X932061	500	2	1993-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK GT	0942061	500	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK GT	0952061	500	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK GT	0962061	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK GT	0972061	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK GT EUROPEAN	E942061	500	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK GT EUROPEAN	E952061	500	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK GT EUROPEAN	E972061	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX	0942064	500	2	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX	0952064	500	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX	0962065	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX	0972065	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX	0982065	500	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX	099SU4BS	500	2	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX	S00SU4BS	500	2	2000-2000		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX	01SU4BS	500	2	2001-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX	02SU4BS	500	2	2002-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX	03SU4BS	500	2	2003-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX	S04SU4BS	500	2	2004-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX	S05SU4BS	500	2	2005-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX		500	2	2006-2007		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX EUROPEAN	E952064	500	2	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX EUROPEAN	E962065	500	2	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX EUROPEAN	E972065	500	2	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX EUROPEAN	E982065	500	2	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX EURO	E01SU4BU	500	2	2000-2000		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 WIDETRAK LX EURO	02SU4BE	500	2	2002-		0,8	BR8ES	5422	Q207	BR8EIX	5044
500 XC	099SB5AS	500	2	1999-		0,7	BR9ES	5722	Q208	BR9EIX	3981
500 XC	S00SB5AS	500	2	2000-2000		0,7	BR9ES	5722	Q208	BR9EIX	3981
500 XC	S01NP5AS	500	2	2001-		0,6	BR10EG	3830			
500 XC	S02NP5AS	500	2	2002-		0,6	BR10EG	3830			
500 XC EDGE	S03NP5AS	500	2	2003-		0,6	BR10EG	3830			
500 XC EDGE F/O	S03NP5CS	500	2	2003-		0,6	BR10EG	3830			
500 XC SP	099SP5AS	500	2	1999-		0,7	BR9ES	5722	Q208	BR9EIX	3981
500 XC SP	S00SP5CS	500	2	2000-2000		0,6	BR10EG	3830			

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren


* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



											
POLARIS											
500 XC SP	S01NP5CS	500	2	2001-		0,6	BR10EG	3830			
500 XC SP	01NP5CSA	500	2	2001-		0,6	BR10EG	3830			
500 XC SP	01NP5CSB	500	2	2001-		0,6	BR10EG	3830			
500 XC SP	02NP5CSA	500	2	2002-		0,6	BR10EG	3830			
500 XC SP	02NP5CSB	500	2	2002-		0,6	BR10EG	3830			
500 XC SP		500	2	2007-		0,6	BR10EG	3830			
500 XC SP EDGE	NP5CSA/B	500	2	2003-		0,6	BR10EG	3830			
500 XC SP EDGE	STOCK B	500	2	2006-		0,6	BR10EG	3830			
500 XC SP EDGE M-10 F/O	S03NE5CS	500	2	2003-		0,6	BR10EG	3830			
500 XC SP EDGE M-10 F/O	S03NF5CS	500	2	2003-		0,6	BR10EG	3830			
500 XC SP EDGE X F/O	S03NA5CS	500	2	2003-		0,6	BR10EG	3830			
500 XC SP EDGE/M-10	S04NP5CS	500	2	2004-		0,6	BR10EG	3830			
500 XC SP EDGE/M-10	S05NE5CS	500	2	2005-		0,6	BR10EG	3830			
500 XC SP F/O	S02NP5CS	500	2	2002-		0,6	BR10EG	3830			
500 XC SP M-10 F/O	S02NE5CS	500	2	2002-	03/01/2001-->	0,6	BR10EG	3830			
EC51PL		500		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC51PL-01		500		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC51PL-01		500		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
EC51PL-02		500		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
EC51PS		500		-		0,5	B10ES	7928		BR10EIX	6801
EC51PS		500		-		0,5	B10ES	7928		BR10EIX	6801
EC51PT		500		-		0,5	B9ES	2611	Q202	BR9EIX	3981
EC51PT		500		-		0,5	B9ES	2611	Q202	BR9EIX	3981
EC51PT-04		500		-		0,5	B8ES	2411	Q201	BR8EIX	5044
EC51PT-04		500		-		0,5	B8ES	2411	Q201	BR8EIX	5044
EC54P		530		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC54P		530		-		0,5	B8ES	2411	Q201	BR8EIX	5044
EC54PM		530		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC54PM		530		-		0,5	B8ES	2411	Q201	BR8EIX	5044
EC60PL-01		530		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
EC60PL-02		530		-		0,6	BR9ES	5722	Q208	BR9EIX	3981
550 INDY / ES / INTL		550	2	2014-		0,7	BR9ES	5722	Q208	BR9EIX	3981
550 INDY 144 / ES		550	2	2014-		0,7	BR9ES	5722	Q208	BR9EIX	3981
550 INDY ADVENTURE / INTL		550	2	2014-		0,7	BR9ES	5722	Q208	BR9EIX	3981
550 INDY LXT		550	2	2014-		0,7	BR9ES	5722	Q208	BR9EIX	3981
550 INDY VOYAGER / INTL		550	2	2014-		0,7	BR9ES	5722	Q208	BR9EIX	3981
550 IQ LXT / INTL		550	2	2011-2013		0,7	BR9ES	5722	Q208	BR9EIX	3981
550 IQ SHIFT / ES / INTL		550	2	2010-2013		0,7	BR9ES	5722	Q208	BR9EIX	3981
550 IQ SHIFT / EURO		550	2	2009-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL RMK		550	2	2007-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL RMK	099SR5BS	550	2	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
TRAIL RMK	S00SR5BS	550	2	2000-2000		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL RMK	S01SR5BS	550	2	2001-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL RMK	S03SR5BS	550	2	2003-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL RMK	S04NJ5BS/A	550	2	2004-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL RMK / ES		550	2	2010-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL RMK 136	S02SR5BS	550	2	2002-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL RMK 136 F/O	S05NJ5BS/A	550	2	2005-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL RMK 136 STOCK		550	2	2006-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL RMK/FLEET/ES/EURO		550	2	2009-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL RMK/FLEET/EURO		550	2	2008-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL TOURING	S00ST5BS	550	2	2000-2000		0,7	BR9ES	5722	Q208	BR9EIX	3981

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
POLARIS											
TRAIL TOURING	S03ST5BS	550	2	2003-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL TOURING DELUXE		550	2	2007-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL TOURING/FLEET/EURO		550	2	2008-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL TOURING/FLEET/ TRANSPORT/EURO		550	2	2009-		0,7	BR9ES	5722	Q208	BR9EIX	3981
550 CLASSIC		550	2	2006-		0,7	BR9ES	5722	Q208	BR9EIX	3981
550 CLASSIC	S05ND5BS	550	2	2005-		0,7	BR9ES	5722	Q208	BR9EIX	3981
550 CLASSIC EDGE	S03ND5BS	550	2	2003-		0,7	BR9ES	5722	Q208	BR9EIX	3981
550 CLASSIC EDGE	S04ND5BS	550	2	2004-		0,7	BR9ES	5722	Q208	BR9EIX	3981
550 EDGE LX		550	2	2007-		0,7	BR9ES	5722	Q208	BR9EIX	3981
550 F/C CLASSIC	S02ND5BS	550	2	2002-		0,7	BR9ES	5722	Q208	BR9EIX	3981
550 LX		550	2	2008-		0,7	BR9ES	5722	Q208	BR9EIX	3981
550 SHIFT 136 / ES / CND ES / CND ES INTL		550	2	2011-2013		0,7	BR9ES	5722	Q208	BR9EIX	3981
SPORT TOURING EURO	E00SD5BU	550	2	2000-2000		0,7	BR9ES	5722	Q208	BR9EIX	3981
SPORT TOURING EURO	S01SD5BU	550	2	2001-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SPORT TOURING	S00SD5BS	550	2	2000-2000		0,7	BR9ES	5722	Q208	BR9EIX	3981
SPORT TOURING	S01SD5BS	550	2	2001-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SPORT TOURING	S02SU5BS	550	2	2002-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SPORT TOURING	S03SU5BS	550	2	2003-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SPORT TOURING	03SU5BSA	550	2	2003-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SPORT TOURING ES	S01ST5BS	550	2	2001-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SPORT TOURING ES EURO	S02SD5BE	550	2	2002-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SPORT TOURING/INTL	NU5BS/BE	550	2	2004-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SUPERSPORT		550	2	2006-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SUPERSPORT	099SB5BS	550	2	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
SUPERSPORT	S00SB5BS	550	2	2000-2000		0,7	BR9ES	5722	Q208	BR9EIX	3981
SUPERSPORT	S00SB5BSA	550	2	2000-2000		0,7	BR9ES	5722	Q208	BR9EIX	3981
SUPERSPORT	S02NB5BS	550	2	2002-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SUPERSPORT	S05NP5BS	550	2	2005-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SUPERSPORT EDGE	S01NB5BS	550	2	2001-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SUPERSPORT EDGE	S01NB5BSA	550	2	2001-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SUPERSPORT EDGE	S03NB5BS/A	550	2	2003-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SUPERSPORT EDGE		550	2	2004-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SUPERSPORT EDGE X F/O		550	2	2003-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SUPERSPORT/EURO		550	2	2007-2008		0,7	BR9ES	5722	Q208	BR9EIX	3981
SUPERSPORT M-10 F/O	S03NE5BS	550	2	2003-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SUPERSPORT M-10 X F/O	S03NF5BS	550	2	2003-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL SKS EURO	099SS5BU	550	2	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
TRAIL SKS EURO	E99SS5BU	550	2	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
TRAIL TOURING		550	2	2006-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL TOURING	S02ST5BS	550	2	2002-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL TOURING/EURO	S05NU5BS	550	2	2005-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL TOURING/INT'L	S04NT5BS/BE	550	2	2004-		0,7	BR9ES	5722	Q208	BR9EIX	3981
TRAIL TOURING/INTL/FLEET		550	2	2010-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC58PL-02/03/07		597		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC58PL-08/09/012		597		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC59PL-01		597		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 INDY / SP / ES / INTL ALL OPTIONS		600	2	2013-		0,7	BPR9ES	7788		BPR9EIX	6853
600 INDY / SP / ES / INTL ALL OPTIONS		600	2	2014-		0,7	BPR9ES	7788		BPR9EIX	6853

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren


* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



											
POLARIS											
600 INDY VOYAGER / INTL		600	2	2014-		0,7	BPR9ES	7788		BPR9EIX	6853
600 / IQ LX / EURO ALL OPTIONS		600	2	2008-		0,6	BR10EG	3830			
600 HO IQ F/O		600	2	2007-		0,6	BR10EG	3830			
600 HO IQ TOURING CLEANFIRE/EURO		600	2	2007-		0,6	BR10EG	3830			
600 HO IQ/LX CLEANFIRE		600	2	2007-		0,6	BR10EG	3830			
600 IQ LXT / INTL		600	2	2011-2014		0,6	BR10EG	3830			
600 IQ RACER		600	2	2010-		0,6	BR10EG	3830			
600 IQ RACER / INTL		600	2	2011-2014		0,6	BR10EG	3830			
600 IQ RACER/EURO		600	2	2008-2009		0,6	BR10EG	3830			
600 IQ SHIFT / ES / INTL		600	2	2010-2012		0,6	BR10EG	3830			
600 IQ SHIFT / EURO		600	2	2008-2009		0,6	BR10EG	3830			
600 IQ SHIFT 136 /EURO		600	2	2009-		0,7	BPR9ES	7788		BPR9EIX	6853
600 IQ TOURING / EURO		600	2	2008-		0,6	BR10EG	3830			
600 IQ TOURING / EURO		600	2	2009-		0,6	BR10EG	3830			
600 IQ TOURING / INTL		600	2	2010-		0,6	BR10EG	3830			
600 IQ/ES/ES EURO		600	2	2009-		0,6	BR10EG	3830			
600 WIDETRACK IQ / INTL		600	2	2010-2014		0,7	BPR9ES	7788		BPR9EIX	6853
600 HO RMK 144 F/O		600	2	2006-		0,6	BR10EG	3830			
600 Pro RMK 155		600	2	2012-		0,7	BPR9ES	7788		BPR9EIX	6853
600 Pro RMK 155		600	2	2013-2014		0,7	BPR9ES	7788		BPR9EIX	6853
600 RMK		600	2	1998-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 RMK EUROPEAN	E980958	600	2	1998-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 RMK		600	2	1999-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 RMK		600	2	1999-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 RMK		600	2	2000-2000		0,6	BR10EG	3830			
600 RMK / 144 / 155 / ES / INTL		600	2	2010-2011		0,6	BR10EG	3830			
600 RMK 136		600	2	2001-		0,6	BR10EG	3830			
600 RMK 136		600	2	2002-		0,6	BR10EG	3830			
600 RMK 144		600	2	2003-		0,6	BR10EG	3830			
600 RMK 144/155		600	2	2007-		0,6	BR10EG	3830			
600 RMK 144/155		600	2	2014-		0,7	BPR9ES	7788		BPR9EIX	6853
600 RMK 144/155 ALL OPTIONS		600	2	2013-		0,7	BPR9ES	7788		BPR9EIX	6853
600 RMK 144/ES/INTL & 155/ES ALL OPTIONS		600	2	2012-		0,7	BPR9ES	7788		BPR9EIX	6853
600 RMK 144/EURO/ RMK SHIFT/EURO		600	2	2008-		0,6	BR10EG	3830			
600 RMK 155		600	2	2008-		0,6	BR10EG	3830			
600 RMK F/O	S04NK6ES	600	2	2004-		0,6	BR10EG	3830			
600 RMK F/O	S05NK6ES	600	2	2005-		0,6	BR10EG	3830			
600 RMK SHIFT 144/155/EURO		600	2	2009-		0,7	BPR9ES	7788		BPR9EIX	6853
600 XLT RMK	0950956	600	3	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT RMK	0960956	600	3	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT RMK	0970956	600	3	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT	0930767	600	3	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XLT	0940756	600	3	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT	0950756	600	3	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT	0966756	600	3	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT EUROPEAN	E930767	600	3	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XLT EUROPEAN	E940756	600	3	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT SKS	0930567	600	3	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XLT SKS	0940567	600	3	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
POLARIS											
600 XLT SKS	0950556	600	3	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT SKS	0960556	600	3	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT SKS EUROPEAN	E930567	600	3	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XLT SKS EUROPEAN	E940567	600	3	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT SKS EUROPEAN	E950556	600	3	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT SKS EUROPEAN	0960556	600	3	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT SP	0920767	600	3	1992-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XLT SP	0930667	600	3	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XLT SP	0940667	600	3	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT SP	0956756	600	3	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT SP	0966676	600	3	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XLT SP 48" STANCE	0956456	600	3	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT SP EUROPEAN	E930667	600	3	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XLT SP EUROPEAN	E940667	600	3	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT SP EUROPEAN	E956756	600	3	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT SP EUROPEAN	0966676	600	3	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XLT SP LT	0956756	600	3	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT SP XTRA	0946767	600	3	1994-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT TOURING	0952857	600	3	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT TOURING	0963357	600	3	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT TOURING EUROPEAN	E952857	600	3	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT TOURING EUROPEAN	E963357	600	3	1996-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 RR / EURO		600	2	2008-2009		0,6	BR10EG	3830			
600 Rush / ES		600	2	2012-		0,7	BPR9ES	7788		BPR9EIX	6853
600 Rush / ES		600	2	2013-		0,7	BPR9ES	7788		BPR9EIX	6853
600 Rush Pro R/ ES / INTL		600	2	2014-		0,7	BPR9ES	7788		BPR9EIX	6853
600 Rush Pro R/ ES / INTL / Retro		600	2	2013-		0,7	BPR9ES	7788		BPR9EIX	6853
600 RUSH PRO-R / ES / RETRO ALL OPTIONS		600	2	2011-		0,7	BPR9ES	7788		BPR9EIX	6853
600 RUSH PRO-R / SC / SP / ES / INTL ALL OPTIONS		600	2	2012-		0,7	BPR9ES	7788		BPR9EIX	6853
600 RUSH/ES/RETRO ES/LX/ LX RETRO ALL OPTIONS		600	2	2011-		0,7	BPR9ES	7788		BPR9EIX	6853
600 SHIFT 136 / ES / INTL		600	2	2011-		0,6	BR10EG	3830			
600 DRAGON SWITCHBACK ALL OPTIONS		600	2	2010-		0,6	BR10EG	3830			
600 SWITCHBACK / ES		600	2	2011-		0,6	BR10EG	3830			
600 SWITCHBACK / ES		600	2	2012-		0,7	BPR9ES	7788		BPR9EIX	6853
600 SWITCHBACK / ES		600	2	2013-		0,7	BPR9ES	7788		BPR9EIX	6853
600 SWITCHBACK / ES		600	2	2014-		0,7	BPR9ES	7788		BPR9EIX	6853
600 SWITCHBACK ADVENTURE		600	2	2012-		0,7	BPR9ES	7788		BPR9EIX	6853
601 SWITCHBACK ADVENTURE		600	2	2013-		0,7	BPR9ES	7788		BPR9EIX	6853
602 SWITCHBACK ADVENTURE		600	2	2014-		0,7	BPR9ES	7788		BPR9EIX	6853
600 SWITCHBACK ASSAULT ALL OPTIONS		600	2	2014-		0,7	BPR9ES	7788		BPR9EIX	6853
600 SWITCHBACK F/O	S05NS6ES	600	2	2005-		0,6	BR10EG	3830			
600 SWITCHBACK PRO R / ES / INTL		600	2	2014-		0,7	BPR9ES	7788		BPR9EIX	6853
600 SWITCHBACK PRO R / ES / INTL / RETRO		600	2	2013-		0,7	BPR9ES	7788		BPR9EIX	6853
600 SWITCHBACK PRO-R		600	2	2012-		0,7	BPR9ES	7788		BPR9EIX	6853
600 SWITCHBACK/DRAGON SWITCHBACK ALL OPTIONS		600	2	2008-		0,6	BR10EG	3830			

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren

* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



POLARIS										
600 SWITCHBACK/DRAGON/EURO		600	2	2009-		0,6	BR10EG	3830		
600 SWITCHBACK/ES/INTL/ LX/INTL ALL OPTIONS		600	2	2010-		0,6	BR10EG	3830		
600 CLEANFIRE SWITCHBACK		600	2	2007-		0,6	BR10EG	3830		
600 HO SWITCHBACK F/O		600	2	2006-2007		0,6	BR10EG	3830		
600 SWITCHBACK	S04NS6ES	600	2	2004-		0,6	BR10EG	3830		
600 CLASSIC		600	2	2006-		0,6	BR10EG	3830		
600 CLASSIC	S02ND6ES	600	2	2002-		0,6	BR10EG	3830		
600 CLASSIC	S03ND6ES	600	2	2003-		0,6	BR10EG	3830		
600 CLASSIC	S04ND6ES	600	2	2004-		0,6	BR10EG	3830		
600 CLASSIC	S05ND6ES	600	2	2005-		0,6	BR10EG	3830		
600 CLASSIC EDGE	S01ND6DS	600	2	2001-		0,6	BR10EG	3830		
600 CLASSIC TOURING	S01ST6ES	600	2	2001-		0,6	BR10EG	3830		
600 CLASSIC TOURING	S02ST6ES	600	2	2002-		0,6	BR10EG	3830		
600 CLASSIC TOURING	S02ST6ESA	600	2	2002-		0,6	BR10EG	3830		
600 CLASSIC TOURING	S02T6ES/ESA	600	2	2003-		0,6	BR10EG	3830		
600 CLASSIC TOURING/INTL	S04NT6ES/EE	600	2	2004-		0,6	BR10EG	3830		
600 DRAGON SP/ES EURO		600	2	2009-		0,6	BR10EG	3830		
600 EDGE TOURING		600	2	2005-		0,6	BR10EG	3830		
600 EDGE TOURING		600	2	2006-		0,6	BR10EG	3830		
600 HO FUSION F/O		600	2	2006-		0,6	BR10EG	3830		
600 PRO X	S01NX6ES	600	2	2001-		0,6	BR10EG	3830		
600 PRO X	S02NX6ES	600	2	2002-		0,6	BR10EG	3830		
600 PRO X	S03NX6ES	600	2	2003-		0,6	BR10EG	3830		
600 PRO X/PRO X2	S04NX6ES	600	2	2004-		0,6	BR10EG	3830		
600 SKS EUROPEAN	E99SS6DU	600	2	1999-		0,7	BR9ES	5722	Q208	BR9EIX 3981
600 TOURING	S00ST6ES	600	2	2000-2000		0,6	BR10EG	3830		
600 TRIUMPH	S00SB6AS	600	2	2000-2000		0,7	BR9ES	5722	Q208	BR9EIX 3981
600 XC TWIN	0971758	600	2	1996-		0,7	BR9ES	5722	Q208	BR9EIX 3981
600 XC	0971776	600	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX 3981
600 XC EUROPEAN	E971776	600	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX 3981
600 XC	0981758	600	2	1998-		0,7	BR9ES	5722	Q208	BR9EIX 3981
600 XC	099SB6DS	600	2	1999-		0,7	BR9ES	5722	Q208	BR9EIX 3981
600 XC DELUXE	S00SD6DS	600	2	2000-2000		0,6	BR10EG	3830		
600 XC EDGE F/O	S03NP6ES	600	2	2003-		0,6	BR10EG	3830		
600 XC SP	099SP6DS	600	2	1999-		0,7	BR9ES	5722	Q208	BR9EIX 3981
600 XC SP	S01NP6ES	600	2	2001-		0,6	BR10EG	3830		
600 XC SP	01NP6ESA	600	2	2001-		0,6	BR10EG	3830		
600 XC SP	01NP6ESB	600	2	2001-		0,6	BR10EG	3830		
600 XC SP	01NP6ESX	600	2	2001-		0,6	BR10EG	3830		
600 XC SP	02NP6ESA	600	2	2002-		0,6	BR10EG	3830		
600 XC SP	02NP6ESB	600	2	2002-		0,6	BR10EG	3830		
600 XC SP EDGE	S00NP6ES	600	2	2000-2000		0,6	BR10EG	3830		
600 XC SP EDGE S03	NP6ESA/B	600	2	2003-		0,6	BR10EG	3830		
600 XC SP EDGE M-10 F/O	S03NE6ES	600	2	2003-		0,6	BR10EG	3830		
600 XC SP EDGE M-10 F/O	S03NF6ES	600	2	2003-		0,6	BR10EG	3830		
600 XC SP EDGE X F/O	S03NA6ES	600	2	2003-		0,6	BR10EG	3830		
600 XC SP EDGE/M-10	S04NP5CS	600	2	2004-		0,6	BR10EG	3830		
600 XC SP EDGE/M-10	S05NE5CS	600	2	2005-		0,6	BR10EG	3830		
600 XC SP EV	S00SP6ES	600	2	2000-2000		0,6	BR10EG	3830		
600 XC SP F/O	S02NP6ES	600	2	2002-		0,6	BR10EG	3830		
600 XC SP M-10 F/O	S02NE6ES	600	2	2002-		0,6	BR10EG	3830		

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
POLARIS											
600 XCR	0941667	600	3	1994-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XCR	0951676	600	3	1995-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XCR	0961676	600	3	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XCR EUROPEAN	E961676	600	3	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XCR	0965677	600	3	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XCR EUROPEAN	E965677	600	3	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XCR	0975677	600	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XCR SE	H975677	600	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XCR SE EUROPEAN	E975677	600	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XCR	0985677	600	3	1998-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XLT	0970756	600	3	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT SKS	0970556	600	3	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT CLASSIC	0983857	600	3	1998-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XLT CLASSIC	099ED6AS	600	3	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT LTD	0973756	600	3	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT LTD EUROPEAN	E973756	600	3	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT LTD	0983756	600	3	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT LTD SP	0973776	600	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XLT SP	0976676	600	3	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT SP	0985776	600	3	1998-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XLT SP	099AB6AS	600	3	1999-		0,7	BR9ES	5722	Q208	BR9EIX	3981
600 XLT TOURING	0973357	600	3	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT TOURING	0983357	600	3	1998-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT TOURING	099ET6AS	600	3	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT TOURING	99ET6ASA	600	3	1999-		0,8	BR8ES	5422	Q207	BR8EIX	5044
600 XLT TOURING EUROPEAN	E973357	600	3	1997-		0,8	BR8ES	5422	Q207	BR8EIX	5044
EC65PL-01/02/03/05		648		-		0,6	BR9ES	5722	Q208	BR9EIX	3981
650	0920758	650	3	1992-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 RXL	0920768	650	3	1992-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 RXL	0930768	650	3	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 RXL	0940768	650	3	1994-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 RXL	0956168	650	3	1995-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 RXL	0966768	650	3	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 RXL	0976768	650	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 RXL EUROPEAN	E930768	650	3	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 RXL LT	0956768	650	3	1995-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 RXL SKS	0920568	650	3	1992-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 RXL SKS	0930568	650	3	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 RXL SKS EUROPEAN	E930568	650	3	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 RXL SKS FINLAND	F920568	650	3	1992-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 RXL SKS SWE	S920568	650	3	1992-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 RXL SWE	S920768	650	3	1992-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 RXL TOURING	0940869	650	3	1994-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 RXL TOURING	0950869	650	3	1995-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 RXL TOURING EUROPEAN	E940869	650	3	1994-		0,7	BR9ES	5722	Q208	BR9EIX	3981
650 SWE	S920758	650	3	1992-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC66PL-01		679		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC66PL-04		679		-		0,7	BR8ES	5422	Q207	BR8EIX	5044
EC68PL-01/03/04		679		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
SN70LCDSP-01/02		701		-		0,7	BR9ES	5722	Q208	BR9EIX	3981
EC74P		744		-		0,5	B7ES	1111		BR7EIX	6664
EC74P		744		-		0,5	B7ES	1111		BR7EIX	6664

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren


* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



										
POLARIS										
EC80P		792		-		0,5	B7ES	1111		BR7EIX 6664
EC80PL-04		794		-		0,7	BR7ES	5122		BR7EIX 6664
EC80PL-05		794		-		0,7	BR7ES	5122		BR7EIX 6664
700 IQ		700	2	2008-		0,6	BR10EG	3830		
700 EDGE RMK CC	S03NS7CS	700	2	2003-	--> 01/01/2002	0,6	BR10EG	3830		
700 RMK		700	2	2006-		0,6	BR10EG	3830		
700 RMK	0970966	700	2	1997-		0,7	BR9ES	5722	Q208	BR9EIX 3981
700 RMK	0980966	700	2	1998-		0,7	BR9ES	5722	Q208	BR9EIX 3981
700 RMK EUROPEAN	E980966	700	2	1998-		0,7	BR9ES	5722	Q208	BR9EIX 3981
700 RMK	099SR7AS	700	2	1999-		0,7	BR9ES	5722	Q208	BR9EIX 3981
700 RMK	99SR7ASA	700	2	1999-		0,7	BR9ES	5722	Q208	BR9EIX 3981
700 RMK	S00SR7AS	700	2	2000-2000		0,6	BR10EG	3830		
700 RMK	S00SR7ASA	700	2	2000-2000		0,6	BR10EG	3830		
700 RMK 136	S01SR7AS	700	2	2001-		0,6	BR10EG	3830		
700 RMK 136	S02NJ7CS	700	2	2002-		0,6	BR10EG	3830		
700 RMK 136 STOCK	S02NJ7CSA	700	2	2002-		0,6	BR10EG	3830		
700 RMK 144	S01SM7AS	700	2	2001-		0,6	BR10EG	3830		
700 RMK 144 F/O CSA	S02NK7CS,	700	2	2002-		0,6	BR10EG	3830		
700 RMK 144 F/O	S03NK7CS	700	2	2003-		0,6	BR10EG	3830		
700 RMK 144 STOCK	02NK7CSA	700	2	2002-		0,6	BR10EG	3830		
700 RMK 144 STOCK	03NK7CSA	700	2	2003-		0,6	BR10EG	3830		
700 RMK 151 F/O	S02NL7CS	700	2	2002-		0,6	BR10EG	3830		
700 RMK 151 F/O	S03NL7CS	700	2	2003-		0,6	BR10EG	3830		
700 RMK 151 STOCK	S03NL7CSA	700	2	2003-		0,6	BR10EG	3830		
700 RMK 155/163 ALL OPTIONS		700	2	2008-		0,6	BR10EG	3830		
700 RM		700	2	2009-		0,6	BR10EG	3830		
700 RMK EARLY PROD		700	2	2008-		0,6	BR10EG	3830		
700 RMK F/O	S04NK6ES	700	2	2004-		0,6	BR10EG	3830		
700 RMK F/O	S05NK6ES	700	2	2005-		0,6	BR10EG	3830		
700 SWITCHBACK/Dragon	Switchback	700	2	2008-		0,6	BR10EG	3830		
700 SWITCHBACK ALL OPTIONS										
700 SWITCHBACK	Switchback	700	2	2004-		0,6	BR10EG	3830		
700 CLASSIC	S01SD7AS	700	2	2001-		0,6	BR10EG	3830		
700 CLASSIC	S02ND7CS	700	2	2002-		0,6	BR10EG	3830		
700 CLASSIC	S03ND7CS	700	2	2003-		0,6	BR10EG	3830		
700 CLASSIC		700	2	2006-		0,6	BR10EG	3830		
700 CLASSIC	S04ND7CS	700	2	2004-		0,6	BR10EG	3830		
700 CLASSIC TOURING	S03NT7CS	700	2	2003-		0,6	BR10EG	3830		
700 CLASSIC TOURIN	S04NT6ES/EE	700	2	2004-		0,6	BR10EG	3830		
700 CLEANFIRE DRA		700	2	2007-		0,6	BR10EG	3830		
700 FUSION F/O		700	2	2006-		0,6	BR10EG	3830		
700 HO TOURING		700	2	2006-		0,6	BR10EG	3830		
700 PRO X	S03NX7CS	700	2	2003-		0,6	BR10EG	3830		
700 PRO X/PRO X2	S04NX6ES	700	2	2004-		0,6	BR10EG	3830		
700 SKS	0970566	700	2	1997-		0,7	BR9ES	5722	Q208	BR9EIX 3981
700 SKS EUROPEAN	E970566	700	2	1997-		0,7	BR9ES	5722	Q208	BR9EIX 3981
700 SKS EUROPEAN	E99SS7AU	700	2	1999-		0,7	BR9ES	5722	Q208	BR9EIX 3981
700 SKS	099SS7AS	700	2	1999-		0,7	BR9ES	5722	Q208	BR9EIX 3981
700 SKS	E00SS7AU	700	2	2000-2000		0,6	BR10EG	3830		
700 SKS	E01SS7AU	700	2	2000-2000		0,6	BR10EG	3830		
700 SKS	S00SS7AS	700	2	2000-2000		0,6	BR10EG	3830		
700 SKS	S01SS7AS	700	2	2001-		0,6	BR10EG	3830		

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
POLARIS											
700 SKS	S02NS7CS	700	2	2002-		0,6	BR10EG	3830			
700 SKS	S03NS7CS/A	700	2	2003-		0,6	BR10EG	3830			
700 SKS	S02SS7CE	700	2	2002-		0,6	BR10EG	3830			
700 ULTRA	0976778	700	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 ULTRA	0986778	700	3	1998-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 ULTRA RMK	0960978	700	3	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 ULTRA SKS	0966778	700	3	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 ULTRA SKS EUROPEAN	E966778	700	3	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 ULTRA SP	0960678	700	3	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 ULTRA SP	0970678	700	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 ULTRA SP EUROPEAN	E960678	700	3	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 ULTRA SPX	0975678	700	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 ULTRA SPX SE	H975678	700	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 ULTRA SPX SE EUROPEAN	E975678	700	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 ULTRA TOURING	0975378	700	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 ULTRA TOURING	0985378	700	3	1998-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 ULTRA TOURING EUROPEAN	E975378	700	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 ULTRA TOURING EUROPEAN	E985378	700	3	1998-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 XC	0971766	700	2	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 XC	0981766	700	2	1998-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 XC EUROPEAN	E981766	700	2	1998-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 XC	099SB7AS	700	2	1999-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 XC DELUXE	S00SD7AS	700	2	2000-2000		0,6	BR10EG	3830			
700 XC EDGE F/O	S03NP7CS	700	2	2003-		0,6	BR10EG	3830			
700 XC EDGE F/O	S04NP7CS	700	2	2004-		0,6	BR10EG	3830			
700 XC SP	099SP7AS	700	2	1999-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 XC SP	S00SP7AS	700	2	2000-2000		0,6	BR10EG	3830			
700 XC SP	S01NP7AS	700	2	2001-		0,6	BR10EG	3830			
700 XC SP	S01NP7ASA	700	2	2001-		0,6	BR10EG	3830			
700 XC SP	S01NP7ASB	700	2	2001-		0,6	BR10EG	3830			
700 XC SP	S02NP7CSA	700	2	2002-		0,6	BR10EG	3830			
700 XC SP	S02NP7CSB	700	2	2002-		0,6	BR10EG	3830			
700 XC SP EDGE	S03NP7CSA/B	700	2	2003-		0,6	BR10EG	3830			
700 XC SP	S01NP7CS	700	2	2001-		0,6	BR10EG	3830			
700 XC SP EDGE M-10 F/O	S03NE7CS	700	2	2003-		0,6	BR10EG	3830			
700 XC SP EDGE M-10 F/O	S03NF7CS	700	2	2003-		0,6	BR10EG	3830			
700 XC SP EDGE X F/O S	S03NA7CS	700	2	2003-		0,6	BR10EG	3830			
700 XC SP F/O	S02NP7CS	700	2	2002-		0,6	BR10EG	3830			
700 XC SP M-10 F/O	S02NE7CS	700	2	2002-		0,6	BR10EG	3830			
700 XC SP		700	2	2005-		0,6	BR10EG	3830			
700 XCR	0985678	700	3	1998-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 XCR EUROPEAN	E985678	700	3	1998-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 XCR	0985678A	700	3	1998-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 XCR EUROPEAN	E985678	700	3	1998-		0,7	BR9ES	5722	Q208	BR9EIX	3981
700 XCR	099AB7BS	700	3	1999-		0,7	BR9ES	5722	Q208	BR9EIX	3981
FS IQ TOURING/EURO		750	2	2007-2009		0,7	BKR7E	6097		BKR7EIX	2667
FST IQ TOURING		750	2	2007-		0,9	PFR7G-9	4371			
800 INDY SP / ES / INTL ALL OPTIONS		800	2	2014-		0,7	BPR9ES	7788		BPR9EIX	6853
800 DRAGON IQ/ES/INTL ALL OPTIONS		800	2	2010-		0,6	BR10EG	3830			
800 IQ / ES		800	2	2009-2010		0,6	BR10EG	3830			
800 DRAGON RMK 155		800	2	2008-		0,6	BR10EG	3830			
SPECIAL LATE PROD											

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren


* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



										
POLARIS										
800 DRAGON RMK 155/163 ALL OPTIONS		800	2	2010-		0,6	BR10EG	3830		
800 DRAGON RMK 155/163/ES/ EURO ALL OPTIONS		800	2	2009-		0,6	BR10EG	3830		
800 DRAGON RMK 155/163/EURO		800	2	2008-		0,6	BR10EG	3830		
800 Pro RMK / 155 / 163 ALL OPTIONS		800	2	2012-		0,7	BPR9ES	7788	BPR9EIX	6853
800 Pro RMK / 155 / 163 ALL OPTIONS		800	2	2013-		0,7	BPR9ES	7788	BPR9EIX	6853
800 Pro RMK / LE 155 / 163 ALL OPTIONS		800	2	2014-		0,7	BPR9ES	7788	BPR9EIX	6853
800 PRO RMK 155 / 163 /ES/INTL ALL OPTIONS		800	2	2011-		0,7	BPR9ES	7788	BPR9EIX	6853
800 RMK	S00SR8BS	800	2	2000-2000		0,6	BR10EG	3830		
800 RMK	S00SR8BSA	800	2	2000-2000		0,6	BR10EG	3830		
800 RMK 144	S01SM8BS	800	2	2001-		0,6	BR10EG	3830		
800 RMK 144 F/O	S02NK8CS	800	2	2002-		0,6	BR10EG	3830		
800 RMK 144 F/O	S03NK8CS	800	2	2003-		0,6	BR10EG	3830		
800 RMK 144 F/O STOCK	S02NK8CSA	800	2	2002-		0,6	BR10EG	3830		
800 RMK 144 STOCK	S03NK8CSA	800	2	2003-		0,6	BR10EG	3830		
800 RMK 144 / 155 / ES / INTL		800	2	2010-		0,6	BR10EG	3830		
800 RMK 151	S01SM8BSA	800	2	2001-		0,6	BR10EG	3830		
800 RMK 151 F/O S02N		800	2	2002-		0,6	BR10EG	3830		
800 RMK 151 F/O	S03NL8CS	800	2	2003-		0,6	BR10EG	3830		
800 RMK 151 STOCK	S02NL8CSA	800	2	2002-		0,6	BR10EG	3830		
800 RMK 151 STOCK	S03NL8CSA	800	2	2003-		0,6	BR10EG	3830		
800 RMK 155		800	2	2014-		0,7	BPR9ES	7788	BPR9EIX	6853
800 RMK 155		800	2	2011-2013		0,7	BPR9ES	7788	BPR9EIX	6853
800 RMK 156 F/O	S02NM8CS	800	2	2002-		0,6	BR10EG	3830		
800 RMK 159 F/O	S03NM8CS	800	2	2003-		0,6	BR10EG	3830		
800 RMK 159 VERTICAL ESCAPE	S03NN8CS	800	2	2003-		0,6	BR10EG	3830		
800 RMK ASSAULT / INTL		800	2	2010-		0,6	BR10EG	3830		
800 RMK ASSAULT 146		800	2	2009-		0,6	BR10EG	3830		
800 RMK ASSAULT 155 ALL OPTIONS		800	2	2012-		0,7	BPR9ES	7788	BPR9EIX	6853
800 RMK ASSAULT 155/ INTL		800	2	2011-		0,7	BPR9ES	7788	BPR9EIX	6853
800 RMK ASSAULT ALL OPTIONS		800	2	2013-2014		0,7	BPR9ES	7788	BPR9EIX	6853
800 RMK F/O	S04NK6ES	800	2	2004-		0,6	BR10EG	3830		
800 RMK F/O	S05NK6ES	800	2	2005-		0,6	BR10EG	3830		
800 RMK SHIFT 144		800	2	2009-		0,6	BR10EG	3830		
800 RMK SP 144	S01SM8BSC	800	2	2001-		0,6	BR10EG	3830		
800 RMK SP 151	S01SM8BSB	800	2	2001-		0,6	BR10EG	3830		
800 RUSH / ES		800	2	2009-		0,6	BR10EG	3830		
800 RUSH / ES		800	2	2012-2013		0,7	BPR9ES	7788	BPR9EIX	6853
800 RUSH PRO R ALL		800	2	2014-		0,7	BPR9ES	7788	BPR9EIX	6853
800 RUSH PRO R ALL OPTIONS		800	2	2012-2013		0,7	BPR9ES	7788	BPR9EIX	6853
800 RUSH PRO-R/ES/RETRO ALL OPTIONS		800	2	2011-		0,7	BPR9ES	7788	BPR9EIX	6853
800 RUSH/ES/RETRO/RETRO LX/ RETRO ES ALL OPTIONS		800	2	2011-		0,7	BPR9ES	7788	BPR9EIX	6853
800 STORM	0932770	800	3	1993-		0,7	BR9ES	5722	Q208	BR9EIX 3981
800 STORM	0940782	800	3	1994-		0,7	BR9ES	5722	Q208	BR9EIX 3981
800 STORM	0950782	800	3	1995-		0,8	BR8ES	5422	Q207	BR8EIX 5044
800 STORM	0965782	800	3	1996-		0,7	BR9ES	5722	Q208	BR9EIX 3981
800 STORM EUROPEAN	E932770	800	3	1993-		0,7	BR9ES	5722	Q208	BR9EIX 3981

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
POLARIS											
800 STORM EUROPEAN	E940782	800	3	1994-		0,7	BR9ES	5722	Q208	BR9EIX	3981
800 STORM EUROPEAN	E950782	800	3	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
800 STORM EUROPEAN	E965782	800	3	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
800 STORM RMK	0965982	800	3	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
800 STORM SKS	0932570	800	3	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
800 STORM SKS	0940582	800	3	1994-		0,7	BR9ES	5722	Q208	BR9EIX	3981
800 STORM SKS	0950582	800	3	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
800 STORM SKS	0965582	800	3	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
800 STORM SKS EUROPEAN	E932570	800	3	1993-		0,7	BR9ES	5722	Q208	BR9EIX	3981
800 STORM SKS EUROPEAN	E940582	800	3	1994-		0,7	BR9ES	5722	Q208	BR9EIX	3981
800 STORM SKS EUROPEAN	E950582	800	3	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
800 STORM SKS EUROPEAN	E965582	800	3	1996-		0,7	BR9ES	5722	Q208	BR9EIX	3981
800 STORM SKS PDL TRK	0950982	800	3	1995-		0,8	BR8ES	5422	Q207	BR8EIX	5044
800 STORM	0975782	800	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
800 STORM RMK	0975982	800	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
800 STORM SE	H975782	800	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
800 STORM SE EUROPEAN	E975782	800	3	1997-		0,7	BR9ES	5722	Q208	BR9EIX	3981
800 STORM	0985782	800	3	1998-		0,7	BR9ES	5722	Q208	BR9EIX	3981
800 DRAGON SWITCHBACK/ ES/INTL ALL		800	2	2010-		0,6	BR10EG	3830			
800 SWITCHBACK ADVENTURE		800	2	2014-		0,7	BPR9ES	7788		BPR9EIX	6853
800 SWITCHBACK ASSAULT ALL OPTIONS		800	2	2014-		0,7	BPR9ES	7788		BPR9EIX	6853
800 SWITCHBACK ASSAULT ALL OPTIONS		800	2	2012-2013		0,7	BPR9ES	7788		BPR9EIX	6853
800 SWITCHBACK ASSAULT/INTL		800	2	2011-		0,7	BPR9ES	7788		BPR9EIX	6853
800 SWITCHBACK F/O	S05NS6ES	800	2	2005-		0,6	BR10EG	3830			
800 SWITCHBACK PRO R/ES/ INT/LE ALL OPTIONS		800	2	2014-		0,7	BPR9ES	7788		BPR9EIX	6853
800 SWITCHBACK PRO-R/ES/ INTL/RETRO/LE ALL OPTIONS		800	2	2013-		0,7	BPR9ES	7788		BPR9EIX	6853
800 SWITCHBACK PRO-R/ES/ SC/SP/INTL ALL OPTIONS		800	2	2012-		0,7	BPR9ES	7788		BPR9EIX	6853
800 SWITCHBACK/DRAGON/EURO		800	2	2009-		0,6	BR10EG	3830			
800 SWITCHBACK/ES		800	2	2010-		0,6	BR10EG	3830			
800 SWITCHBACK/ES		800	2	2014-		0,7	BPR9ES	7788		BPR9EIX	6853
800 SWITCHBACK/ES		800	2	2012-2013		0,7	BPR9ES	7788		BPR9EIX	6853
800 SWITCHBACK	S04NS6ES	800	2	2004-		0,6	BR10EG	3830			
800 CLASSIC	S04ND8CS	800	2	2004-		0,6	BR10EG	3830			
800 CLASSIC TOURING	S03NT8CS	800	2	2003-		0,6	BR10EG	3830			
800 CLASSIC TOURING/INT'L	S04NT6ES/EE	800	2	2004-		0,6	BR10EG	3830			
800 DRAGON SP/ES EURO		800	2	2009-		0,6	BR10EG	3830			
800 EDGE TOURING		800	2	2005-		0,6	BR10EG	3830			
800 LE	S01ND8BS	800	2	2001-		0,6	BR10EG	3830			
800 PRO X	S03NX8CS	800	2	2003-		0,6	BR10EG	3830			
800 PRO X/PRO X2	S04NX6ES	800	2	2004-		0,6	BR10EG	3830			
800 PRO XR	S04NZ8CS	800	2	2004-		0,6	BR10EG	3830			
800 SKS S0	S03NS8CS/A	800	2	2003-		0,6	BR10EG	3830			
800 XC EDGE F/O	S03NP8CS	800	2	2003-		0,6	BR10EG	3830			
800 XC EDGE F/O	S04NP7CS	800	2	2004-		0,6	BR10EG	3830			
800 XC SP	S01NP8BS	800	2	2001-		0,6	BR10EG	3830			
800 XC SP	S01NP8BSA	800	2	2001-		0,6	BR10EG	3830			

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          										
POLARIS										
800 XC SP	S01NP8BSB	800	2	2001-		0,6	BR10EG	3830		
800 XC SP EDGE	S03NP8CSA/B	800	2	2003-		0,6	BR10EG	3830		
800 XC SP EDGE M-10 F/O	S03NE8CS	800	2	2003-		0,6	BR10EG	3830		
800 XC SP EDGE M-10 F/O	S03NF8CS	800	2	2003-		0,6	BR10EG	3830		
800 XC SP EDGE X F/O	S03NA8CS	800	2	2003-		0,6	BR10EG	3830		
800 XC SP F/O	S02NP8CS	800	2	2002-		0,6	BR10EG	3830		
800 XC SP M-10 F/O	S02NE8CS	800	2	2002-		0,6	BR10EG	3830		
800 XC SP M-10 F/O		800	2	2005-		0,6	BR10EG	3830		
800 XC SP STOCK	S02NP8CSA	800	2	2002-		0,6	BR10EG	3830		
800 XC SP STOCK	S02NP8CSB	800	2	2002-		0,6	BR10EG	3830		
800 XCR	099AB8AS	800	3	1999-		0,7	BR9ES	5722	Q208	BR9EIX 3981
800 XCR	S00SB8AS	800	3	2000-2000		0,7	BR9ES	5722	Q208	BR9EIX 3981
800 XCR	S01SB8AS	800	3	2001-		0,7	BR9ES	5722	Q208	BR9EIX 3981
800 XCR	S02SB8AS	800	3	2002-		0,7	BR9ES	5722	Q208	BR9EIX 3981
800 XCR	S03SB8AS	800	3	2003-		0,7	BR9ES	5722	Q208	BR9EIX 3981
900 RMK		900	2	2006-		0,6	BR10EG	3830		
900 RMK ALL OPTIONS	S05PL8/PM8/PN8	900	2	2005-		0,6	BR10EG	3830		
900 SWITCHBACK		900	2	2006-		0,6	BR10EG	3830		
900 SWITCHBACK	S05PS8DS	900	2	2005-		0,6	BR10EG	3830		
900 FUSION	S05MP8DS	900	2	2005-		0,6	BR10EG	3830		
900 FU		900	2	2006-		0,6	BR10EG	3830		
REDLINE										
REVOLT		800		2004-		0,6	BR8ES	5422		BR8EIX 5044
ROLL-O-FLEX										
292 S		292		-	Yamaha Engine	*				BR9EIX 3981
292 Y		292		-	Yamaha Engine	0,6	B8ES	2411	Q201	BR8EIX 5044
338 S		338		-	Yamaha Engine	*				BR9EIX 3981
338 Y		338		-	Yamaha Engine	0,6	B7HS	5110	Q204	BR7HIX 7067
396 Y		396		-	Yamaha Engine	0,6	B7HS	5110	Q204	BR7HIX 7067
433 S		433		-	Yamaha Engine	*				BR9EIX 3981
433 Y		433		-	Yamaha Engine	0,6	B7HS	5110	Q204	BR7HIX 7067
RUPP										
With CDI Systems				-	Tohatsu Engine / 12.7mm(1/2") Reach	*	BUHX	2522		
With CDI Systems				-	Tohatsu Engine / 19.0mm(3/4") Reach	*	BUE	2322		
TR-295		294		-	Tohatsu Engine	0,5	B8HS	5510	Q205	BR8HIX 7001
TR-295S		294		-	Tohatsu Engine	0,5	B9HS	5810		BR9HIX 5687
TR-340		336		-	Tohatsu Engine	0,5	B8HS	5510	Q205	BR8HIX 7001
TR-340S		336		-	Tohatsu Engine	0,5	B9HS	5810		BR9HIX 5687
TR-400S		339		-	Tohatsu Engine	0,5	B8HS	5510	Q205	BR8HIX 7001
TR-440		438		-	Tohatsu Engine	0,5	B8HS	5510	Q205	BR8HIX 7001
TR-440S		438		-	Tohatsu Engine	0,5	B9HS	5810		BR9HIX 5687
TR-650		644		-	Tohatsu Engine	0,5	B9HS	5810		BR9HIX 5687
TR-650S		644		-	Tohatsu Engine	0,5	B9HS	5810		BR9HIX 5687

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren

* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap





SACHS

SA 280, SA 280A		277		-		0,5	AB-7	3010			
SA2-290		291		-	12.7mm(1/2") Reach	0,5	B8HS	5510	Q205	BR8HIX	7001
SA2-290		291		-	19.0mm(3/4") Reach	0,5	B8ES	2411	Q201	BR8EIX	5044
SA 290		293		-		0,5	AB-7	3010			
SA 290C, SA 290R, SA 290SS		293		-		0,5	B8HS	5510	Q205	BR8HIX	7001
KM 914		300		-		0,5	B7HS	5110	Q204	BR7HIX	7067
SA 320		318		-		0,5	AB-7	3010			
SA 340C, SA 340R		334		-		0,5	B8HS	5510	Q205	BR8HIX	7001
SA 340		336		-		0,5	AB-7	3010			
SA 340SS		336		-		0,5	AB-8	7909			
SA2-340		338		-	12.7mm(1/2") Reach	0,5	B8HS	5510	Q205	BR8HIX	7001
SA2-340		338		-	19.0mm(3/4") Reach	0,5	B8ES	2411	Q201	BR8EIX	5044
SA2-340RX, SA2-340C		338		-		0,5	B9ES	2611	Q202	BR9EIX	3981
SA 370		368		-		0,5	AB-7	3010			
SA 400		396		-		0,5	AB-8	7909			

SCORPION

295		290		-	Cuyuna Engine	0,5	B8ES	2411	Q201	BR8EIX	5044
400		339		-	Cuyuna Engine	0,5	B8ES	2411	Q201	BR8EIX	5044
2F400-A		399		-	Cuyuna Engine	0,5	B8ES	2411	Q201	BR8EIX	5044
2F440-A		428		-	Cuyuna Engine	0,5	B8ES	2411	Q201	BR8EIX	5044
440		428		-	Cuyuna Engine	0,5	B8ES	2411	Q201	BR8EIX	5044
AF44L3		436		-	SPIRIT SUZUKI	0,5	BR9ES	5722	Q208	BR9EIX	3981

SKI-DOO / BOMBARDIER

Mini Z		120	1	1998-2003		0,6	BPR6ES	4852		BPR6EIX	6637
250		247		-	10-12HP	0,5	AB-6	2910			
250		247		-	14HP	0,5	AB-7	3010			
250 Deluxe, 250T		247		-		0,5	B7HS	5110	Q204	BR7HIX	7067
250 SS		247		-		0,5	B8HS	5510	Q205	BR8HIX	7001
247 Elan, Spirit		250		-		0,5	AB-7	3010			
Citation L/S		253		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
Tunda, -LT		253		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
Skandic Tundra LC		280		2003-2004		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Tundra F		280		2004-		0,5	BR9ES	5722	Q208	BR9EIX	3981
300		299		-	12.0HP	0,5	AB-6	2910			
300S		299		-		0,5	AB-7	3010			
300 MX-Z300 / Fan		300		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
TNT, RV340, Sonic 340		337		-		0,5				BR10EIX	6801
TNT 340 Free Air		339		-		0,5	B9ES	2611	Q202	BR9EIX	3981
TNT 340SM		339		-		0,5	B8HS	5510	Q205	BR8HIX	7001
354 Blizzard 6500		339		-		0,5				BR10EIX	6801
354 Super Sonic / LC		339		-		0,5				BR10EIX	6801
300 Touring 300 / Fan		368		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
Formula S		368		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
368 MX-Z380 / Fan		368		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
368 Touring 380 / Fan		368		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
377 Safari Saga		368		-		0,5	BR9ES	5722	Q208	BR9EIX	3981
377 Touring E / ELT		377		-		0,4	BR9ES	5722	Q208	BR9EIX	3981
380 Formula Deluxe 380		377		-		0,4	BR9ES	5722	Q208	BR9EIX	3981
380 Scandic 380		380		-		0,4	BR9ES	5722	Q208	BR9EIX	3981

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          										
SKI-DOO / BOMBARDIER										
Legend Fan, GT		380	2004-		0,5	BR9ES	5722	Q208	BR9EIX	3981
MXZ Fan		380	2004-		0,5	BR9ES	5722	Q208	BR9EIX	3981
400 MX-Z400 / Fan		400	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
440 MX-Z 440 / F		436	-		0,4	BR9ES	5722	Q208	BR9EIX	3981
444 Elite		436	-		0,5	B8ES	2411	Q201	BR8EIX	5044
444 LC Everest, Futura		436	-		0,5	B8ES	2411	Q201	BR8EIX	5044
TNT 440 Free Air		437	-	18mm Head	0,5	AB-7	3010			
TNT 440 Free Air		437	-	14mm Head	0,5	B9ES	2611	Q202	BR9EIX	3981
440 Skandic LC / LT440		437	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
447 Grand Luxe		437	-		0,5	BR8ES	5422	Q207	BR8EIX	5044
454 Blizzard 9500 / Plus		437	-		0,5				BR10EIX	6801
440		440	2004-		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
MXZ 440 X Racing		440	2005-2005		0,8	BR9ECS	3570		BR9ECSIX	5438
MXZ 440 X Racing		440	2007-2007		0,8	BR9ECS	3570		BR9ECSIX	5438
Skandic LT		440	2004-		0,5	BR9ES	5722	Q208	BR9EIX	3981
Touring LE		440	-		0,4	BR9ES	5722	Q208	BR9EIX	3981
447 Safari 1986		447	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
454 Ultra Sonic		463	-		0,5				BR10EIX	6801
Formula SLS		494	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
Skandic WT LC		494	-		0,5	BR8ES	5422	Q207	BR8EIX	5044
Summit 500		494	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
467 Formula MX		496	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
467 Formula LT		496	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
503 Alpine II		496	-		0,5	BR8ES	5422	Q207	BR8EIX	5044
Formula Deluxe / LC / Fan		497	-		0,4	BR9ES	5722	Q208	BR9EIX	3981
Scandic SWT / WT / LC		497	-		0,4	BR9ES	5722	Q208	BR9EIX	3981
Summit Fun / Touring Fan		497	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
503 Safari Cheyenne / Escapade		497	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
503 Sonic MX 1983		497	-		0,5	BR7ES	5122		BR7EIX	6664
500 Formula Z / Grand Touring		499	-		0,4	BR9ES	5722	Q208	BR9EIX	3981
MXZ 500 Trail / Fan		499	-		0,4	BR9ES	5722	Q208	BR9EIX	3981
Grand Touring LC		500	2002-2002		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
GSX		500	2004-2007		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
GSX Sport, 1+1		500	2004-		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
GTX		500	2005-2007		0,8	BR9ECS	3570		BR9ECSIX	5438
Legend LC		500	2002-2004		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Legend Sport,Sport GT		500	2004-		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
MXZ		500	2005-2007		0,8	BR9ECS	3570		BR9ECSIX	5438
MXZ LC		500	2002-2004		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
MKZ Trail 500 SS		500	2007-2008		0,8	BR9ECS	3570		BR9ECSIX	5438
MXZ 500 Adrenaline		500	2004-		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
MXZ 500 Trail		500	2004-		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Skandic / SWT / WT / WT LC		500	-		0,4	BR9ES	5722	Q208	BR9EIX	3981
Skandic LC		500	2002-2003		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
503 Formula SL		503	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
536 Formula Plus / LT		521	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
Expedition		550	2005-2006		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Expedition		550	2009-2012		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Expedition Sport 550 F XP		550	2013-2014		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Grand Touring 550 F Sport		550	2010-2012		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Grand Touring Sport 550 F XP		550	2013-2014		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
GSX		550	2005-2006		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

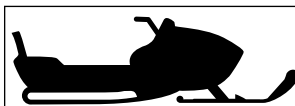* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
SKI-DOO / BOMBARDIER											
GTX		550	2005-2005		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
Legend Fan, GT		550	2004-		0,5	BR9ES	5722	Q208	BR9EIX	3981	
MXZ Fan		550	2004-		0,5	BR9ES	5722	Q208	BR9EIX	3981	
MXZ 550F TNT / Sport		550	2010-2012		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
MXZ Sport 550 F XP		550	2013-2014		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
Renegade 550 F / Sport 550 F XP		550	2010-2013		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
Skandic Sport /SUV/SWT/WT		550	2004-		0,5	BR9ES	5722	Q208	BR9EIX	3981	
Skandic WT 550 F XU		550	2012-2014		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
Summit Fan		550	2004-		0,5	BR9ES	5722	Q208	BR9EIX	3981	
Summit		550	2005-2005		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
Tundra STD / Sport / LT 550 F XP / LTS		550	2012-2013		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
583 Formula Deluxe		581	-		0,4	BR9ES	5722	Q208	BR9EIX	3981	
Grand Touring		581	-		0,5	BR9ES	5722	Q208	BR9EIX	3981	
Summit		583	-		0,5	BR9ES	5722	Q208	BR9EIX	3981	
Formula III		599	-		0,5	BR10ES	4832		BR10EIX	6801	
Formula III LT		599	-		0,5	BR10ES	4832		BR10EIX	6801	
Ace		600	2012-		0,8	MR7BI-8	90982				
Expedition		600	2005-2005		0,8	BR9ECS	3570		BR9ECSIX	5438	
Formula III		600	-		0,5	BR10ES	4832		BR10EIX	6801	
Formula Delux		600	-		0,5	BR9ES	5722	Q208	BR9EIX	3981	
Expedition		600	2006-		0,8	BR8ECS	3972		BR8EIX	5044	
Formula Z		600	-		0,5	BR9ES	5722	Q208	BR9EIX	3981	
GSX Sport, 1+1		600	2004-		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
GSX Limited, Limited 1+1, Sport		600	2004-		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
GSX		600	2004-2005		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
GTX		600	2005-2005		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
GSX SDI		600	2006-		0,8	BR8ECS	3972		BR8EIX	5044	
GSX LTD		600	2009-		0,8	PZFR6F	7550				
Grand Touring		600	2002-2003		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
Grand Touring / SE		600	-		0,5	BR9ES	5722	Q208	BR9EIX	3981	
Grand Touring Sport 600 XP		600	2012-2013		0,8	BR9ECS	3570		BR9ECSIX	5438	
Legend		600	2002-2004		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
Legend SE/SE GT/Sport/Sport GT		600	2004-		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
MXZ 600		600	2002-2005		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
MXZ 600 Adrenaline, Renegade, X		600	2004-		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
MXZ 600 Adrenaline, Renegade		600	2004-		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
MXZ 600 Adrenaline		600	2006-2006		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
MXZ 600 Adrenaline		600	2007-2008		0,8	BR9ECS	3570		BR9ECSIX	5438	
MXZ 600 Renegade		600	2006-2006		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
MXZ 600 SDI		600	2006-		0,8	BR8ECS	3972		BR8EIX	5044	
MXZ 600 50TH, X, Adrenaline, TNT		600	2009-		0,8	PZFR6F	7550				
MKZ 600 RS		600	2009-2009		0,8	BR9ECS	3570		BR9ECSIX	5438	
MXZ TNT / Sport 600 XP		600	2012-2012		0,8	BR9ECS	3570		BR9ECSIX	5438	
MXZ 600 Trail		600	-		0,5	BR9ES	5722	Q208	BR9EIX	3981	
MKZ 600 XP, XR, XU		600	2008-		0,8	PZFR6F	7550				
MXZ 600 Sport XP		600	2013-2013		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
MXZ X 600 RS XP		600	2013-2013		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
MXZ Sport 600 REV-XP		600	2014-2014		0,8	BR9ECS	3570		BR9ECSIX	5438	
MXZ X 600 RS		600	2009-2012		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
MXZ X 600 RS XS RS		600	2014-2014		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
Skandic		600	2002-2005		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	
Skandic SUV / WT LC		600	2004-		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014	

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren

* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



										
SKI-DOO / BOMBARDIER										
Skandic SUV		600	2006-2008		0,8	BR9ECS	3570		BR9ECSIX	5438
Skandic WT		600	2006-2009		0,8	BR9ECS	3570		BR9ECSIX	5438
Summit		600	2002-2005		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Summit		600	2006-		0,8	BR8ECS	3972		BR8EIX	5044
Summit 600 HO		600	2005-2005		0,8	BR9ECS	3570		BR9ECSIX	5438
Summit Adren, X		600	2004-		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Summit Everest, X		600	2009-		0,8	PZFR6F	7550			
Summit Sport 600		600	2012-2014		0,8	BR9ECS	3570		BR9ECSIX	5438
640 ER Alpine		635	-		0,5	B7HS	5110	Q204	BR7HIX	7067
670 MX-Z H.O.		669	-		0,4	BR9ES	5722	Q208	BR9EIX	3981
670 Formula SS / Z		670	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
Mach 1		670	-		0,5	BR10ES	4832		BR10EIX	6801
Summit / X		670	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
Mach 1		699	-		0,4	BR10ES	4832		BR10EIX	6801
Formula Z 600		699	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
MXZ 700 / Trail 700		699	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
700 Grand Touring		699	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
Grand Touring		700	2002-2003		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Legend		700	2002-2004		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Legend SE, SE GT, Sport, Sport GT		700	2004-		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
MXZ		700	2002-2003		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Summit		700	2002-2003		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Grand Touring SE		765	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
Mach Z		765	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
MX2600		765	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
MX2700		765	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
Summit 700		765	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
Skandic WT LC		765	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
Mach Z / ZLT		779	-		0,5	BR10ES	4832		BR10EIX	6801
Grand Touring SE		796	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
Mach Z800		796	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
Grand Touring SE		798	-		0,5	BR10ES	4832		BR10EIX	6801
Summit		800	-		0,5	BR9ES	5722	Q208	BR9EIX	3981
GSX Limited, Limited 1+1		800	2004-		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Grand Touring SE		800	2002-2003		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
GSX		800	2004-2004		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
GSX		800	2005-2008		0,8	BR9ECS	3570		BR9ECSIX	5438
GTX		800	2005-2007		0,8	BR9ECS	3570		BR9ECSIX	5438
Legend 800		800	2002-2004		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Mach Z		800	2003-2004		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
MXZ		800	2002-2004		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
MXZ		800	2005-2009		0,8	BR9ECS	3570		BR9ECSIX	5438
MXZ 800 Adrenaline, Renegade, X		800	2004-		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
MXZ 800 R Adrenaline / X-RS / X		800	2009-2010		0,8	BR9ECS	3570		BR9ECSIX	5438
MXZ 800 Renegade		800	2009-2009		0,8	BR9ECS	3570		BR9ECSIX	5438
Renegade 800		800	2010-2010		0,8	BR9ECS	3570		BR9ECSIX	5438
Summit		800	2002-2004		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Summit Adrenaline, HM, HM X, HM Xtreme, Sport, X		800	2004-		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Summit 800		800	2005-2012		0,8	BR9ECS	3570		BR9ECSIX	5438
Summit X R, R E-Tec		800	2012-		0,8	PFR7AB	93322			
Summit Sport 800 R PTEK XP		800	2013-2013		0,8	BR9ECS	3570		BR9ECSIX	5438

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          										
SKI-DOO / BOMBARDIER										
Mach Z		809	-		0,4	BR10ES	4832		BR10EIX	6801
Elite SE		1000	2004-		0,8	DCPR8E	4179		DCPR8EIX	6546
Expedition		1000	2006-		0,8	BR8ECS	3972		BR8EIX	5044
Legend 1000		1000	2003-2004		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Legend SE, SE GT, Sport, Sport GT		1000	2004-		0,8	DCPR8E	4179		DCPR8EIX	6546
Mach Z		1000	2005-2005		0,8	BR9ECS	3570		BR9ECSIX	5438
MXZ 1000		1000	2006-		0,8	BR8ECS	3972		BR8EIX	5044
Mach Z Adrenaline 2T		1000	2005-		0,5	BR9ECS-5	6669		BR9ECSIX-5	6014
Summit Highmark 2T		1000	2005-		0,5	BR8ECS	3972		BR8EIX	5044
SUZUKI										
Nomad		292	-		0,7	B7HS	5110	Q204	BR7HIX	7067
Nomad		336	-		0,7	B7HS	5110	Q204	BR7HIX	7067
F / C		340	-		0,8	BR9EYA	7548		BR9EIX	3981
SM10 / SM10D		360	-		0,7	B7HS	5110	Q204	BR7HIX	7067
370F/C		370	-		0,8	BR9EYA	7548		BR9EIX	3981
400 Wide Track		395	-		0,7	B7HS	5110	Q204	BR7HIX	7067
SM20		395	-		0,7	B7HS	5110	Q204	BR7HIX	7067
SM20 Hop Up Kit		395	-		0,7	B8ES	2411	Q201	BR8EIX	5044
XR400		395	-		0,7	B7HS	5110	Q204	BR7HIX	7067
440 L/C-ZRV		400	1998-		0,7	BR10ES	4832		BR10EIX	6801
440 L/C-ZRV		400	1999-		0,8				BR10EIX	6801
440 L/C-ZRV		400	2000-		0,8	BR9EYA	7548		BR9EIX	3981
440 XR		432	-		0,7	B7HS	5110	Q204	BR7HIX	7067
440 F/C		433	-		0,8	BR9EYA	7548		BR9EIX	3981
440 F/C-C		433	-		0,8	BR9ES	5722	Q208	BR9EIX	3981
440 L/C-LWS		433	-		0,8	BR9EYA	7548		BR9EIX	3981
SM440M		433	-		0,7				BR9EIX	3981
F / C		500	-		0,8	BR9ES	5722	Q208	BR9EIX	3981
L/C		500	2000-		0,8				BR10EIX	6801
L/C - L/C-EID		500	1999-		0,8	BR9EYA	7548		BR9EIX	3981
L/C		530	-		0,7	BR10ES	4832		BR10EIX	6801
550 L/C		530	-		0,8	BR9EYA	7548		BR9EIX	3981
L/C-EID		580	-		0,8	BR9EYA	7548		BR9EIX	3981
L/C - L/C-EID		600	-		0,8	BR9EYA	7548		BR9EIX	3981
L/C		650	-		0,7	BR10ES	4832		BR10EIX	6801
L/C		700	1999-		0,7	BR10ES	4832		BR10EIX	6801
L/C		700	-1995		0,8	BR9ES	5722	Q208	BR9EIX	3981
L/C		785	-		0,8	BR9EYA	7548		BR9EIX	3981
L/C		800	-		0,8	BR9EYA	7548		BR9EIX	3981
L/C		900	-		0,8	BR9EYA	7548		BR9EIX	3981
L/C		1000	-		0,8	BR9EYA	7548		BR9EIX	3981
THREE R INDUSTRIES										
TRAIL ROAMER		725	-		0,6	BKR5ES	2460		BKR5EIX	6341

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren












* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement

* Por favor, ajustar distancia entre electrodos

* regolare il gap



          											
TRAIL MANTA											
500 L/C		500		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
440 L/C		440		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
EC34PL		340		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
XENOA H ENGINES											
XENOA H LC		440		-		*	BUE	2322			
XENOA H FC		340		-		0,6	B8ES	2411	Q201	BR8EIX	5044
XENOA H LC		340		-		*	BUE	2322			
YAMAHA											
SE 80		80	1	-		0,7	BR8HS	4322	Q212	BR8HIX	7001
SV 80 Series		80	1	-		0,7	BR8HS	4322	Q212	BR8HIX	7001
SV 125 Series		125		-		0,7	BR8HS	4322	Q212	BR8HIX	7001
BR 250 Series		250		-		0,7	BR8HS	4322	Q212	BR8HIX	7001
ET 250 Series		250		-		0,7	B8HS	5510	Q205	BR8HIX	7001
ET 250A/B		250		-		0,6				BR8HIX	7001
CF 300		300		-		0,7	BR8HS	4322	Q212	BR8HIX	7001
EC 300		300		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
ET 300 Series		300		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
ET 300C		300		-		0,6				BR9EIX	3981
CS 340 / E / EC		340		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
EC / ET 340 Series		340		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
ET 340 B / C / EC		340		-		0,6				BR9EIX	3981
EX 340 Series		340		-		0,6				BR9EIX	3981
EX 570 Series		340		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
S 340		340		-		0,8	BR8ES	5422	Q207	BR8EIX	5044
ET 400 Series		400		-		0,8	BR8ES	5422	Q207	BR8EIX	5044
SS 440 Series		440		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
PZ 480 Series		480		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
VT 480 Series		480		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
Phazer SS		485		1997-1998		0,8	BR9ECS	3570		BR9ECSIX	5438
Venture Lite / Multi Purpose		499	2	2010-		0,7	CR9EKB	2305		CR9EIX	3521
Phazer		499	2	2012-		0,8	CR9EKB	2305		CR9EIX	3521
Phazer		499	2	2010-		0,7	CR9EKB	2305		CR9EIX	3521
Phazer		499	2	2010-		0,7	CR9EKB	2305		CR9EIX	3521
PZ 500 / C / DX / ML / MLD / ST		500		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
SX 500 / D		500		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
V-Max 500		500		1996-1999		0,8	BR9ECS	3570		BR9ECSIX	5438
V-Max SX		500		1999-1999		0,8	BR9ECS	3570		BR9ECSIX	5438
VT 500 Series		500		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
VX 500 Series		500		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
SR 540 Series		540		1990-1994		0,6				BR9EIX	3981
SR 540 Series		540		-1989		0,8	BR9ES	5722	Q208	BR9EIX	3981
VK 540 Series		540		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
VMX 540 Series		540		1990-1994		0,6				BR9EIX	3981
VMX 540 Series		540		-1989		0,8	BR9ES	5722	Q208	BR9EIX	3981
XL 540 Series		540		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
III		540		2005-		0,8	BR9ES	5722	Q208	BR9EIX	3981
MM 600/D		600		-		0,8	BR9ES	5722	Q208	BR9EIX	3981
Mountain Max		600		1999-1999		0,8	BR9ECS	3570		BR9ECSIX	5438

* Bitte Elektrodenabstand nach Angaben des Herstellers justieren

* Please adjust the groundelectrode gap

* Veuillez vérifier L' écartement


* Por favor, ajustar distancia entre electrodos

* regolare il gap





Cross Reference Guide

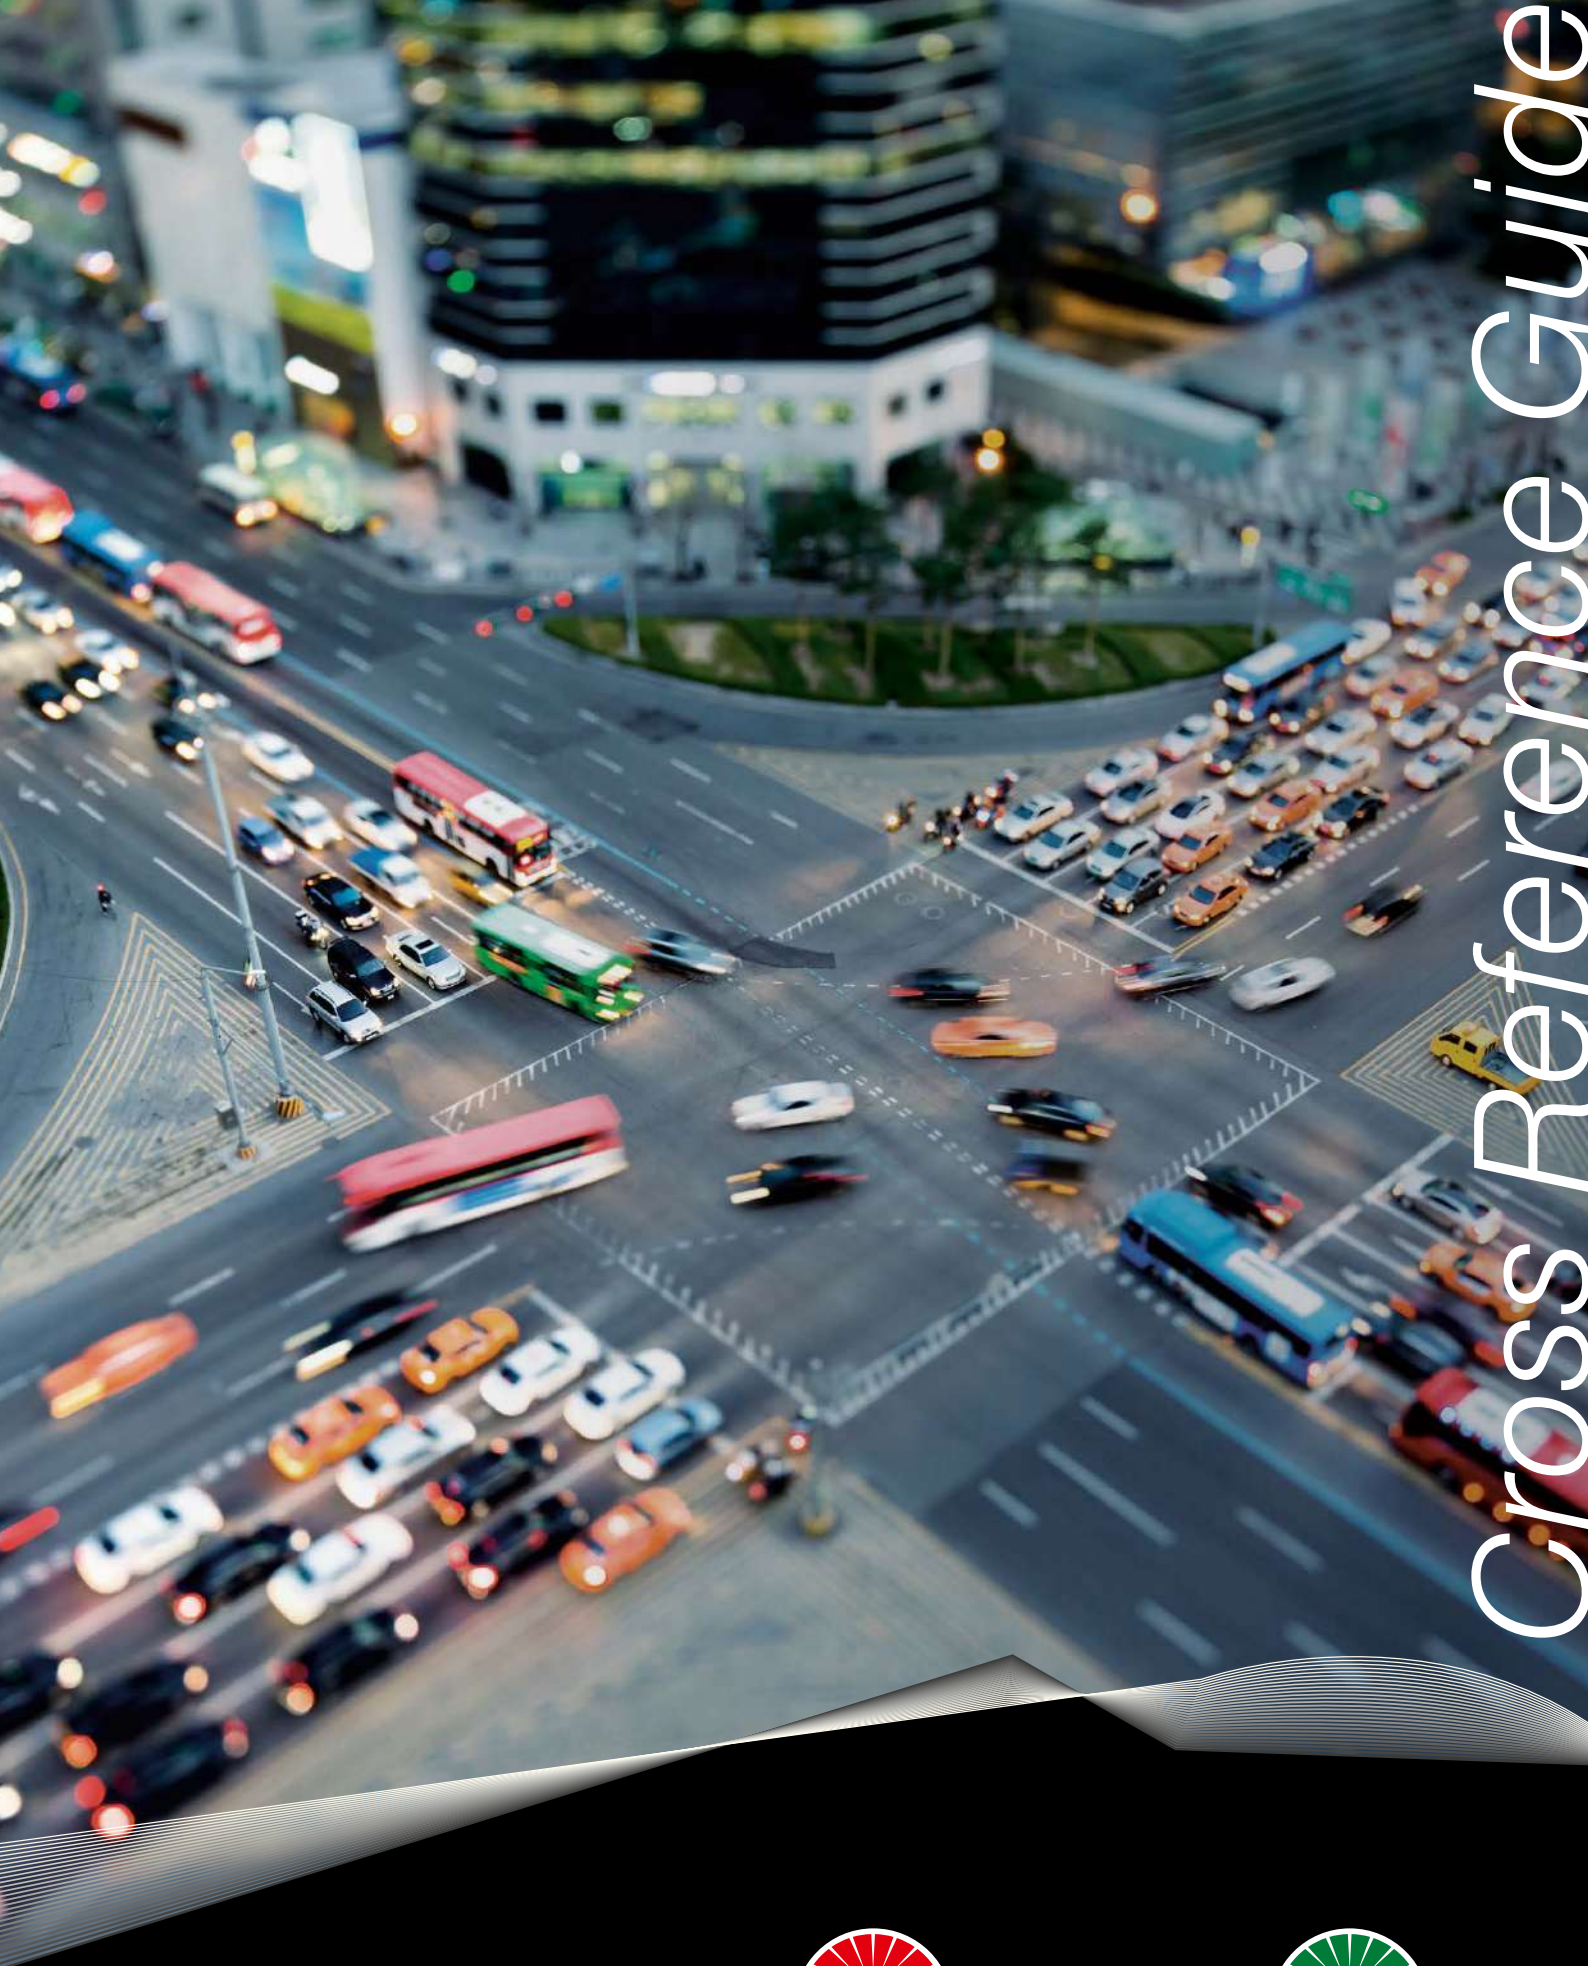

IGNITION
PARTS



VEHICLE
ELECTRONICS



ACDelco	→ NGK	Quick
41-601	BPR6ES	
41-812	TR6IX	
41 XL	B9ES	Q202
42 F	B6HS	Q203
42 FF	B6HS	Q203
42 FS	BP6HS	
42 XL	B8ES	Q201
42 XLS	BP6ES	
43 F	B6HS	Q203
43 FFS	BP6HS	
43 FS	BP6HS	
43 N	B7ES	
43 XL	B7ES	
43 XLS	BP6ES	
44	B6S	Q302
44 F	B5HS	
44 FF	B5HS	
44 FFS	BP5HS	
44 N	B6ES	
44 NS	BP5ES	
44 XL	B6ES	
44 XLO	BP5ES	
44 XLS	BP5ES	
45	B-4	
45 F	B5HS	
45 FF	B5HS	
45 FFS	BP5HS	
45 NS	BP5ES	
45 XL	B6ES	
45 XLS	BP5ES	
46	B-4	
46 F	B5HS	
46 FF	B5HS	
46 FFS	BP5HS	
46 N	B5ES	
46 XL	B5ES	
47 FF	B-4H	
47 S	BP-4	
47 XL	B4ES	
48	B-4	
414 XLS	BP6ES	
420 Z	B-4H	
422 Z	B5HS	
425 F	B6HS	Q203
425 Z	B6HS	Q203
426 FS	BP6HS	
430 Z	B7HS	Q204
438 XLS	BP8ES	
440 XLS	BP8ES	
445 Z	B8HS	Q205
B 43	B6S	Q302
B 44 FS	BP5HS	

ACDelco	→ NGK	Quick
B 45	B-4	
B 4021	B6S	Q302
B 4031	B-4	
C 41	B7S	
C 42 CFS	BP6HS	
C 42 CLTS	BP6EFS	
C 42 CXLS	BP6ES	
C 42 LTS	BP6EFS	
C 42 N	B7ES	
C 42 XLS	BP5ES	
C 43	B6S	Q302
C 43 CXLS	BP6ES	
C 43 L	B-6L	
C 43 N	B6ES	
C 44	B6S	Q302
C 44 N	B6ES	
C 44 NS	BP5ES	
C 44 XL	B6ES	
C 45	B-4	
C 46	B-4	
C 47	B-4	
C 47 W	B-4	
C 81	AB-8	
C 82	AB-7	
C 83	AB-7	
C 85	AB-6	
C 86	AB-6	
C 87	AB-6	
C 421	B6S	Q302
CFR 2 CLS	BKR6ES	
CR 42 CXLS	BPR6ES	
CR 42 N	BR7ES	
CR 43	BR6S	
CR 43 CXLS	BPR6ES	
CR 43 K	BR6S	
CR 43 N	BR6ES	
CR 44 N	BR6ES	
CR 44 NS	BPR5ES	
CS 45	BM6A	Q303
CSR 45	BMR6A	Q307
FR 2 LS	BKR6ES	
FR 2 LSK	BKR6ES	
FR 3 CLS	BKR5ES	
FR 3 CLS 6	BKR5ES-11	
FR 3 LS	BKR5ES	
FR 3 LS 6	BKR5ES-11	
FR 3 LSK	BKR5ES	
FR 5 LS	BKR5ES	
M 40 FF	B9HS	
M 40 FFX	B9HS-10	
M 41 FF	B8HS	Q205
M 41 K	B8S	





ACDelco	→ NGK	Quick
M 42 FF	B7HS	Q204
M 42 K	B7S	
M 43 FF	B6HS	Q203
M 44 B	B6S	Q302
M 44 C	B6S	Q302
M 44 L	B-6L	
M 45	B-4	
M 45 FF	B5HS	
M 47	B-4	
M 86	AB-6	
MB 42 K	B6S	Q302
MC 41	B8S	
MC 41 F	B8HS	Q205
MC 42	B8S	
MC 42 F	B7HS	Q204
MC 44	B7S	
MC 104 F	C6HSA	
MC 122 F	D8HA	
MC 124 FS	D6HA	
MR 42 K	BR6S	
MR 44 C	BR6S	
MR 45	B-4	
R 41 CF	BR7HS	Q211
R 41 CXL	BR9ES	Q208
R 41 CXLS	BPR7ES	
R 42 CF	BR6HS	Q209
R 42 CFS	BPR6HS	Q214
R 42 CXL	BR8ES	Q207
R 42 CXLS	BPR6ES	
R 42 FS	BPR6HS	Q214
R 42 XL	BR8ES	Q207
R 42 XLS	BPR6ES	
R 42 XLSM	ZGR5C	
R 43	BR6S	
R 43 C	BR6S	
R 43 CFS	BPR6HS	Q214
R 43 CXL	BR7ES	
R 43 CXLS	BPR6ES	
R 43 FS	BPR6HS	Q214
R 43 N	BR7ES	
R 43 XL	BR7ES	
R 43 XLS	BPR6ES	
R 44	BR6S	
R 44 CF	BR5HS	
R 44 CXL	BR6ES	
R 44 CXLS	BPR5ES	
R 44 F	BR5HS	
R 44 N	BR6ES	
R 44 NS	BPR5ES	
R 44 XL	BR6ES	
R 44 XLS	BPR5ES	
R 44 XLSE	ZGR5C	

ACDelco	→ NGK	Quick
R 44 XLSM	ZGR5C	
R 45	BR6S	
R 45 NS	BPR5ES	
R 45 XL	BR6ES	
R 45 XLS	BPR5ES	
R 46	BR6S	
R 46 S	BP-4	
R 46 XLS	BPR4ES	
R 47 S	BP-4	
R 426 FS	BPR6HS	Q214
S 40 F	B9HS	
S 40 FR	BR9HS	
S 40 XL	B10ES	
S 40 XLR	BR8ES	Q207
S 41 F	B8HS	Q205
S 41 FG	B7HCS	
S 41 FR	BR8HS	Q212
S 41 XL	B9ES	Q202
S 41 XLR	BR9ES	Q208
S 42	B7S	
S 42 F	B7HS	Q204
S 42 FR	BR7HS	Q211
S 42 XL	B8ES	Q201
S 42 XLR	BR8ES	Q207
S 43 XL	B7ES	
S 43 XLR	BR7ES	
S 44	B6S	Q302
S 44 F	B5HS	
S 44 XL	B6ES	
S 45 F	B5HS	
S 46	B-4	
S 81 F	AB-8	
S 82 F	AB-8	
S 83 F	AB-7	
S 85 F	AB-6	
S 102 F	C7HSA	
S 104 F	C6HSA	
S 121 F	D8HA	
S 121 XL	D8EA	Q216
S 122 F	D8HA	
S 123 XL	D7EA	
S 124 FS	D6HA	
S 404 XLG	B10EG	
S 408 XLG	B9EG	
SB 41	B7S	
SN 46	B-4	
SV 4 XL	BUE	
SV 41 XL	BUE	
TC 42	B8S	
TC 45	B6S	Q302
TC 81	AB-8	
TC 82	AB-8	





ACDelco	→ NGK	Quick
TC 83	AB-7	
TC 85	AB-6	
TC 86	AB-6	
APRILIA	→ NGK	Quick
297 542	DR8EA	
297 547	DR8EB	
297 830	BR10EG	
297 920	CR8E	Q226
297 921	CR8EIX	
297 942	DCPR9E	
297 945	R0045Q-10	
897 055	BR8ES	Q207
8 122 586	DR7EA	
8 176 075	BPR4HS	
8 206 870	BR7HS	Q211
8 206 871	BR8HS	Q212
8 206 873	BR8ES	Q207
8 206 915	BR9ES	Q208
8 224 684	CR7EB	
8 224 685	CR9EB	
8 520 007	CR7E	Q225
8 550 352	CR7E	Q225
8 560 146	CR7EKB	
8 570 084	CR8EB	
8 600 008	BR9ECM	
2 BEN 000181	CPR8E	
2 BEN 000276	CPR8E	
2 BEN 000319	ZMR7AP	
AUTOLITE / TUNER	→ NGK	Quick
53	BP6ES	
54	BP6ES	
55	BP5ES	
56	BP5ES	
63	BPR6ES	
64	BPR6ES	
65	BPR5ES	
66	BPR5ES	
67	BPR4ES	
77	BP-4	
86	BP-4	
87	BP-4	
215	B-6L	
216	B-6L	
235	BM6A	Q303
245	BMR6A	Q307
254	BM6A	Q303
255	BM6A	Q303
273	BP6HS	
274	BP6HS	

AUTOLITE / TUNER	→ NGK	Quick
275	BP5HS	
276	BP5HS	
283	BPR7HS	Q215
284	BPR6HS	Q214
292	B8S	
294	B6S	Q302
295	B-4	
297	B-4	
302	BR6S	
303	BR6S	
304	BR6S	
306	B-4	
312	B8S	
313	B7S	
314	B6S	Q302
315	B6S	Q302
316	B6S	Q302
317	B-4	
353	B8S	
354	B6S	Q302
355	B6S	Q302
356	B-4	
357	B-4	
363	BR6S	
372	AB-8	
373	AB-7	
374	AB-7	
375	AB-6	
376	AB-6	
377	AB-6	
378	AB-6	
386	AB-6	
393	B7ES	
394	B6ES	
395	B5ES	
396	B5ES	
397	B5ES	
398	B4ES	
402	BR8ES	Q207
403	BR6ES	
404	BR6ES	
411	B9HS	
413	B7HS	Q204
414	B6HS	Q203
415	B5HS	
416	B5HS	
417	B-4H	
424	B6HS	Q203
425	BR5HS	
426	BR5HS	
436	B-6L	
494	B-6L	





AUTOLITE / TUNER	→ NGK	Quick
495	B-6L	
515	BP5HS	
516	BP5HS	
517	BP-4H	
535	B5HS	
536	B-4H	
915	ZGR5C	
925	ZGR5C	
935	BPR5ES	
945	BPR5ES	
996	B-6L	
2272	AB-7	
2413	R7376-10	
2414	B10EG	
2415	B9EG	
2416	B8EG	
2585	BPR5ES	
2592	B10ES	
2593	B9ES	Q202
2594	B9ES	Q202
2611	B10ES	
2612	B9ES	Q202
2613	B9ES	Q202
2614	B8ES	Q201
2615	B7ES	
2616	B6ES	
2634	B9HS-10	
2635	B8HS	Q205
2636	B7HS	Q204
2652	B9HS-10	
2653	B7HS	Q204
2654	B7HS	Q204
2655	B6HS	Q203
2656	B5HS	
2675	B-6L	
2676	B-6L	
2695	AB-8	
2696	AB-7	
2697	AB-6	
2715	D8HA	
2716	D6HA	
2735	D6HA	
2755	D8EA	Q216
2772	AB-8	
2775	AB-6	
2794	C8HSA	
2795	C7HSA	
2796	C6HSA	
2892	BUHX	
2932	BUE	
2974	BPM7A	Q305
3012	B8S	

AUTOLITE / TUNER	→ NGK	Quick
3013	B7S	
3014	B6S	Q302
3017	B-4	
3035	AB-6	
3116	AB-6	
3203	BPR6ES	
3204	BPR6ES	
3205	BPR5ES	
3206	BPR5ES	
3207	BPR5ES	
3325	B-6L	
3364	BPR6HS	Q214
3382	BR6S	
3383	BR6S	
3384	BR6S	
3386	BR6S	
3388	BR6S	
3423	B8S	
3426	BR6S	
3462	BR7ES	
3463	BR6ES	
3464	BR6ES	
3485	BR5HS	
3486	BR5HS	
3507	B-6L	
3684	BR7HS	Q211
3686	BR6HS	Q209
3702	BR9ES	Q208
3703	BR9ES	Q208
3704	BR8ES	Q207
3705	BR6ES	
3706	BR6ES	
3885	ZGR5C	
3896	ZGR5C	
3924	BKR6ES	
3926	BKR5ES	
3954	D8EA	Q216
3964	DR8ES-L	Q218
4043	BPR6ES-11	
4052	B9ES	Q202
4053	B9ES	Q202
4054	B8ES	Q201
4055	B7ES	
4056	B6ES	
4062	BR9ES	Q208
4063	BR9ES	Q208
4092	B7HS	Q204
4093	B7HS	Q204
4113	BP6HS	
4114	BP6HS	
4123	BPR6HS	Q214
4132	D8EA	Q216





AUTOLITE / TUNER	→ NGK	Quick
4143	DR8ES-L	Q218
4152	DP9EA-9	
4153	DP8EA-9	
4162	DPR7EA-9	Q220
4163	DR8ES-L	Q218
4164	D7EA	
4173	D8HA	
4193	C7HSA	
4203	CR7HS	
4251	BP8ES	
4253	BP6ES	
4263	BPR6ES	
4265	BPR5ES	

BERU	→ NGK	Quick
12-5 DU	D7EA	
14-2 AS1	B9HCS	
14-3 A1	B8HS	Q205
14-3 AS1	BR8HIX	
14-3 AU	B8HS	Q205
14-3 CS1	BR8EIX	
14-3 DP2	BR8EIX	
14-4 A1	B8HS	Q205
14-4 A2	B7HS	Q204
14-4 AS1	BR8HIX	
14-4 AU	B7HS	Q204
14-4 B2	BP7HS	
14-4 C1	B8ES	Q201
14-4 C2	B7ES	
14-4 CS1	BR8EIX	
14-5 A	B7HS	Q204
14-5 AU	B7HS	Q204
14-5 B	BP7HS	
14-5 BU	BP7HS	
14-5 C	B7ES	
14-5 E	B7S	
14-6 B	BP6HS	
14-6 BU	BP6HS	
14-6 C	B6ES	
14-6 D	BP6ES	
14-6 D1	BP6ES	
14-6 DP0	BP6ES	
14-6 DU	BP6ES	
14-7 A	B6HS	Q203
14-7 AU	B6HS	Q203
14-7 B	BP6HS	
14-7 BU	BP6HS	
14-7 C	B6ES	
14-7 CU	B6ES	
14-7 D	BP6ES	
14-7 DU	BP6ES	

BERU	→ NGK	Quick
14-7 E	B6S	Q302
14-8 A	B5HS	
14-8 AU	B5HS	
14-8 B	BP5HS	
14-8 BU	BP5HS	
14-8 C	B5ES	
14-8 C1	B6ES	
14-8 D	BP5ES	
14-8 DU	BP5ES	
14-8 E	B-4	
14-8 LUR	ZGR5A	
14-9 C	B5ES	
14-9 D	BP5ES	
14-9 DU	BP5ES	
14-10 A	B-4H	
14-10 B	BP4HS	
14-10 C	B4ES	
14-10 E	B-4	
14-10 F	BP-4	
14 F-5 DU	BCP7ES	
14 F-6 DSR	BKR6ES	
14 F-6 DU0R	BKR6ES	
14 F-7 DU0R	BKR6ES	
14 FGH-6 DTUR	BKUR6ET	
14 FGR-7 CTU	BCPR7ET	
14 FR-5 DTU	BCPR7ET	
14 FR-6 DU	BKR6ES	
14 FR-6 DUX	BKR6ES-11	
14 FR-6 LDUW	BKR6EKC	
14 FR-7 DU	BKR6ES	
14 FR-7 DUX	BKR6ES-11	
14 FR-8 DU	BKR5ES	
14 FR-8 DUX	BKR5ES-11	
14 K-6 D	BP6EFS	
14 K-6 DU	BP6EFS	
14 K-6 DU0	BP6EFS	
14 K-7 D	BP6EFS	
14 K-7 DU	BP6EFS	
14 K-7 DU0	BP6EFS	
14 KR-8 MPX	PTR5A-13	
14 KR-8 MUV	PTR5A-13	
14 R-5 DU	BPR7ES	
14 R-6 B	BPR6HS	Q214
14 R-6 BU	BPR6HS	Q214
14 R-6 D	BPR6ES	
14 R-6 DU	BPR6ES	
14 R-6 DUX	BPR6ES-11	
14 R-7 B	BPR6HS	Q214
14 R-7 BU	BPR6HS	Q214
14 R-7 CU	BR6ES	
14 R-7 D	BPR6ES	
14 R-7 DU	BPR6ES	





BERU	→ NGK	Quick
14 R-7 DUX	BPR6ES-11	
14 R-8 DU	BPR5ES	
14 R-8 DUX	BPR5ES-11	
14 R-9 DU	BPR5ES	
14 R-9 EU0	BR4-LM	
14 R-11 F	BP-4	
14 S-5 F	BPM7A	Q305
14 S-7 F	BPM6A	Q304
14 S-8 F	BPM6A	Q304
14 X-AU	B6HS	Q203
14 Z-2 C1	BR9EIX	
14 Z-3 A1	B9HS	
14 Z-3 AU	B9HS	
14 Z-3 C1	B9ES	Q202
14 Z-3 CU	B9ES	Q202
14 Z-4 AU	B8HS	Q205
14 Z-6 A2	B6HS	Q203
14 Z-7 AU	B7HS	Q204
18-4 A1	AB-7	
18-4 A2	AB-7	
18-5 A	AB-7	
18-5 AS	AB-7	
18-5 AU	AB-7	
18-7 A	AB-6	
18-7 AU	AB-7	
18-8 A	AB-6	
18-10 A	AB-6	
18-10 AU	AB-6	
95/14	B-4H	
95/14/3	B4ES	
95/14/5	B-4	
95/14/5A	BP-4	
95/14A	BP4HS	
95/18	AB-6	
Z 1	BP5ES	
Z 3	ZGR5A	
Z 8	BPR5ES	
Z 9	BPR5ES-11	
Z 10	BP6HS	
Z 11	BP6ES	
Z 13	BKR6ES	
Z 15	BKR6ES	
Z 16	BKR6ES-11	
Z 17	BP6EFS	
Z 18	BP6EFS	
Z 19	BPR6HS	Q214
Z 20	BPR6ES	
Z 21	BPR6ES-11	
Z 22	BP6ES	
Z 23	BKR6ES	
Z 24	BKR6ES	
Z 25	BP6EFS	

BERU	→ NGK	Quick
Z 27	BPR6ES	
Z 28	BPR6ES-11	
Z 29	BCP7ES	
Z 35	D7EA	
Z 37	B9HS	
Z 38	B9ES	Q202
Z 39	B8HS	Q205
Z 40	B7HS	Q204
Z 41	BP7HS	
Z 45	BCPR7ET	
Z 47	BPR7ES	
Z 48	BP6HS	
Z 55	BP6EFS	
Z 56	BP6EFS	
Z 57	B6HS	Q203
Z 58	B6ES	
Z 59	BR6ES	
Z 60	BCPR7ET	
Z 68	B5HS	
Z 72	BKR5ES	
Z 73	BKR5ES-11	
Z 76	BP5ES	
Z 82	BPR5ES	
Z 84	BR4-LM	
Z 85	B6HS	Q203
Z 86	AB-7	
Z 87	AB-7	
Z 88	AB-6	
Z 89	BKUR6ET	
Z 97	PTR5A-13	
Z 99	BKR6ES-11	
Z 104	BP6ES	
Z 105	BKR6ES	
Z 107	BP-4	
Z 112	B-4	
Z 118	BP5HS	
Z 132	BPM6A	Q304
Z 177	PTR5A-13	
Z 245	BKR6EKC	
Z 265	BPM7A	Q305
125/14/3	B5ES	
125/14/3A	BP5ES	
145/14	B5HS	
145/14/3	B5ES	
145/14/3A	BP5ES	
145/14/5	B-4	
145/14/5AMX	BPM6A	Q304
145/18	AB-6	
145/1A	BP5HS	
160/14/3	B6ES	
175/14	B6HS	Q203
175/14/3	B6ES	





BERU	→ NGK	Quick
175/14/3A	BP6ES	
175/14/5	B6S	Q302
175/14/5AMX	BPM6A	Q304
175/14A	BP6HS	
175/18	AB-6	
190/14 Z	B6HS	Q203
200/14/3	B6ES	
200/14/3A	BP6ES	
200/14/3K	BP6EFS	
200/14A	BP6HS	
215/14/3A	BP6ES	
225/14	B7HS	Q204
225/14/3	B7ES	
225/14/5	B7S	
225/14/5AMX	BPM7A	Q305
225/14A	BP7HS	
225/18	AB-7	
225/18S	AB-7	
240/14	B7HS	Q204
240/14/3	B7ES	
240/14 A	BP7HS	
240/14 S	BR8HIX	
240/18	AB-7	
260/14	B8HS	Q205
260/14/3	B8ES	Q201
260/14 S	BR8HIX	
260/18	AB-8	
265/14/3P	BR8EIX	
280/14	B8HS	Q205
280/14/3S	BR8EIX	
280/14/3Z	B9ES	Q202
280/14Z	B9HS	
310/14/3Z	BR9EIX	
310/14S	B9HCS	
D 175/14	B6HS	Q203
D 175/14/3	B6ES	
D 200/14/3A	BP6ES	
D 215/14/3	B7ES	
RS 16	BPR6HIX	
RS 18	BPR7HIX	
RS 33	BPR5EIX	
RS 35	BPR6EIX	
RS 37	BPR7EIX	
RS 39	BPR7EIX	
0 001 245 700	D7EA	
0 001 325 701	BP5ES	
0 001 330 702	BP5ES	
0 001 330 718	ZGR5A	
0 001 335 702	BP6ES	
0 001 335 707	B6ES	
0 001 335 729	BKR6ES	
0 001 340 103	BKUR6ET	

BERU	→ NGK	Quick
0 001 340 702	BP6ES	
0 001 340 723	BKR6ES	
0 001 340 806	BKR6ES	
0 001 340 903	BP6ES	
0 001 345 720	BCP7ES	
0 001 355 700	B9ES	Q202
0 001 400 701	B6HS	Q203
0 001 430 700	BP5HS	
0 001 430 701	B5HS	
0 001 435 700	BP6HS	
0 001 435 705	B6HS	Q203
0 001 440 700	BP6HS	
0 001 445 700	BP7HS	
0 001 445 702	B7HS	Q204
0 001 450 702	B8HS	Q205
0 001 455 702	B9HS	
0 001 529 302	B-4	
0 001 635 700	BP6EFS	
0 001 635 709	BP6EFS	
0 001 640 700	BP6EFS	
0 001 640 704	BP6EFS	
0 001 640 705	BP6EFS	
0 001 820 700	AB-6	
0 001 835 700	AB-7	
0 001 845 700	AB-7	
0 002 325 700	BPR5ES	
0 002 330 701	BPR5ES	
0 002 330 702	BPR5ES-11	
0 002 330 703	BKR5ES	
0 002 330 704	BKR5ES-11	
0 002 335 100	BCPR7ET	
0 002 335 701	BPR6ES	
0 002 335 704	BR6ES	
0 002 335 706	BPR6ES-11	
0 002 335 707	BKR6ES	
0 002 335 708	BKR6ES-11	
0 002 340 504	BKR6EKC	
0 002 340 701	BPR6ES	
0 002 340 702	BKR6ES	
0 002 340 703	BPR6ES-11	
0 002 340 704	BKR6ES-11	
0 002 345 701	BPR7ES	
0 002 345 704	BCPR7ET	
0 002 435 701	BPR6HS	Q214
0 002 515 400	BP-4	
0 002 630 701	PTR5A-13	
0 002 640 900	PTR5A-13	
0 004 525 701	BR4-LM	
0 004 535 402	BPM6A	Q304
0 004 545 401	BPM7A	Q305





BETA	→ NGK	Quick
361100000	BPR7ES	
BMW	→ NGK	Quick
11 12 7 675 485	KR9CI	
12 12 1 342 836	BKR7EKC	
12 12 2 343 144	D8EA	Q216
12 12 7 650 676	BKR7EKC	
12 12 7 650 676.3	BKR7EKC	
12 12 7 653 439	CR8EB	
12 12 7 653 771	BKR7EKC	
12 12 7 664 404	DR8EB	
12 12 7 671 301	DCPR8EKC	
12 12 7 671 302	BKR7EKC	
12 12 7 677 560	DCPR8EKC	
12 12 7 681 415	BKR7EKC	
12 12 7 699 116	KR9CI	
12 12 7 710 636	CR9EKB	
12 12 7 710 681	MAR9B-JDS	
12 12 7 719 772	LMAR9D-J	
12 12 7 722 278	MAR9B-JDS	
12 12 7 726 112	MAR8B-JDS	
12 12 7 728 634	DCPR8EKC	
12 12 7 728 635	KR9CI	
12 12 7 728 657	LMAR8AI-8	
12 12 8 532 942	LMAR8D-J	
BOMBARDIER	→ NGK	Quick
415 129 484	PFR7AB	
512 059 533	BR9ECS-5	
512 060 294	PZFR6F	
BOSCH	→ NGK	Quick
877 1207	R2349-10	
F 5 DC	BCP7ES	
F 6 DCOR	BKR6ES	
F 6 DSR	BKR6EIX	
F 7 DCOR	BKR6ES	
F 7 DER	BKR6ES	
F 8 DCOR	BKR5ES	
FR 5 DTC	BCPR7ET	
FR 5 LDC	BKR7EKC	
FR 6 DC	BKR6ES	
FR 6 DC+	BKR6ES	
FR 6 DC 2	BKR6ES	
FR 6 DCX	BKR6ES-11	
FR 6 DDC	BKR7EKC	
FR 6 KTC	BKUR6ET	
FR 7 DC	BKR6ES	
FR 7 DC+	BKR6ES	
FR 7 DC 0	BKR6ES	

BOSCH	→ NGK	Quick
FR 7 DC 2	BKR6ES	
FR 7 DC 4	BKR6ES	
FR 7 DCX	BKR6ES-11	
FR 7 DCX+	BKR6ES-11	
FR 7 DPP 10	BKR6EIX	
FR 7 LC 2	BKR6ES	
FR 8 DC	BKR5ES	
FR 8 DC+	BKR5ES	
FR 8 DC 0	BKR5ES	
FR 8 DCX	BKR5ES-11	
FR 8 DCX+	BKR5ES-11	
FR 8 DE	BKR5ES	
FR 8 DS	BKR5EIX	
FR 8 DX	BKR5ES-11	
FR 9 DC	BKR5ES	
H 6 DC	BP6EFS	
H 6 DC 0	BP6EFS	
H 7 DC	BP6EFS	
H 7 DC 0	BP6EFS	
HR 7 MPP+	PTR5A-13	
HR 7 MPP 302	PTR5A-13	
HR 7 MPP 302 X	PTR5A-13	
M 4 AC	AB-7	
M 5 AC	AB-7	
M 7 AC	AB-7	
M 8 AC	AB-6	
M 8 AC0	AB-6	
M 10 AC	AB-6	
M 10 AC0	AB-6	
U 3 CC	C7E	
U 4 AC	C6HSA	
UR 2 AS	CR8HS	
UR 2 CC	CR8E	Q226
UR 3 AC	CR7HSA	
UR 3 AS	CR7HS	
UR 3 CC	CR7E	Q225
UR 4 AS	CR6HS	Q223
UR 6 AC	CR6HS	Q223
VR 8 SE	LZKAR7A	
VR 8 SEW	LZKAR7A	
W 2 A	B9HS	
W 2 AC	B9HS	
W 2 AS	BR9HIX	
W 2 C	B10ES	
W 2 C0	B10ES	
W 2 CC	B10ES	
W 2 CS	BR10EIX	
W 3 A	B8HS	Q205
W 3 A 0	B8HS	Q205
W 3 AC	B8HS	Q205
W 3 AP	B8HS	Q205
W 3 AS	BR8HIX	





BOSCH	→ NGK	Quick
W 3 C	B9ES	Q202
W 3 C0	B9ES	Q202
W 3 CC	B9ES	Q202
W 3 CP	B9ES	Q202
W 3 CS	BR9EIX	
W 3 D	BP8ES	
W 3 DP	BPR8EIX	
W 3 DP0	BPR8EIX	
W 3 DP 2	BP8ES	
W 4 A	B8HS	Q205
W 4 A 1	B8HS	Q205
W 4 A 2	B8HS	Q205
W 4 A 5	B8HS	Q205
W 4 AC	B8HS	Q205
W 4 AP	B8HS	Q205
W 4 AS	BR8HIX	
W 4 C	B8ES	Q201
W 4 C 1	B8ES	Q201
W 4 C 2	B7ES	
W 4 C3	B7HS	Q204
W 4 CC	B8ES	Q201
W 4 CP	BR8EIX	
W 4 CPX	B8ES	Q201
W 4 CS	BR8EIX	
W 4 DP	BPR7EIX	
W 4 DP0	BPR8EIX	
W 4 E2	B7S	
W 5 A	B7HS	Q204
W 5 AC	B7HS	Q204
W 5 AP	B7HS	Q204
W 5 AS	BR7HIX	
W 5 B	BP7HS	
W 5 BC	BP7HS	
W 5 BP	BP7HS	
W 5 C	B7ES	
W 5 CC	B7ES	
W 5 CP	B7ES	
W 5 CS	BR7EIX	
W 5 E	B7S	
W 5 EC	B7S	
W 5 EP	B7S	
W 6 AC	B6HS	Q203
W 6 B	BP6HS	
W 6 BC	BP6HS	
W 6 BP	BP6HS	
W 6 D	BP6ES	
W 6 D1	BP6ES	
W 6 DC	BP6ES	
W 6 DP	BPR6EIX	
W 6 DPX	BPR6EIX-11	
W 7 A	B6HS	Q203
W 7 A0	B6HS	Q203

BOSCH	→ NGK	Quick
W 7 A00	B6HS	Q203
W 7 AP	B6HS	Q203
W 7 B	BP6HS	
W 7 BC	BP6HS	
W 7 BP	BP6HS	
W 7 C	B6ES	
W 7 CC	B6ES	
W 7 CC0	B6ES	
W 7 CP	B6ES	
W 7 D0	BP6ES	
W 7 DC	BP6ES	
W 7 DCR	BPR6ES	
W 7 DP	BP6ES	
W 7 E	B6S	Q302
W 7 EC	B6S	Q302
W 7 EP	B6S	Q302
W 8 A	B5HS	
W 8 A0	B5HS	
W 8 AC	B5HS	
W 8 AP	B5HS	
W 8 B	BP5HS	
W 8 BC	BP5HS	
W 8 BP	BP5HS	
W 8 C	B5ES	
W 8 C0	B5ES	
W 8 CC	B5ES	
W 8 CCX	B5ES	
W 8 CP	B5ES	
W 8 D	BP5ES	
W 8 DC	BP5ES	
W 8 DC0	BP5ES	
W 8 DCX	BP5ES-11	
W 8 DP	BP5ES	
W 8 DPX	BP5ES-11	
W 8 DX	BP5ES-11	
W 8 E	B6S	Q302
W 8 EC	B6S	Q302
W 8 LCR	ZGR5A	
W 8 LPR	ZGR5A	
W 9 A	B-4H	
W 9 A0	B-4H	
W 9 AC	B5HS	
W 9 AC0	B5HS	
W 9 C	B4ES	
W 9 CC	B4ES	
W 9 D	BP5ES	
W 9 DC	BP5ES	
W 9 DC0	BP5ES	
W 9 DCX	BP5ES-11	
W 9 DP	BP5ES	
W 9 DPX	BP5ES-11	
W 9 E	B-4	





BOSCH	→ NGK	Quick
W 9 EC	B-4	
W 9 LC	ZGR5A	
W 10 A	B-4H	
W 10 AC	B-4H	
W 10 C	B4ES	
W 10 CC	B4ES	
W 10 E	B-4	
W 10 EC	B-4	
W 10 F	BP-4	
W 10 FC	BP-4	
W 12 A	B-4H	
W 45 T1	B-4H	
W 45 T3	B-4	
W 06 CS	BR10EIX	
W 07 AS	BR10HIX	
W 07 CS	BR10EIX	
W 08 AS	BR9HIX	
W 08 CS	BR10EIX	
W 95 T1	B-4H	
W 95 T2	B4ES	
W 95 T3	B-4	
W 95 T6	BP-4	
W 95 TR6	BP-4	
W 125 T1	B-4H	
W 125 T2	B4ES	
W 125 T3	B-4	
W 125 T4	B-4H	
W 125 T30	BP5ES	
W 125 TR3	BR6S	
W 125 TR30	BPR5ES	
W 145 M1	B5HS	
W 145 M2	B5ES	
W 145 T1	B5HS	
W 145 T2	B5ES	
W 145 T3	B6S	Q302
W 145 T11	B5HS	
W 145 T30	BP5ES	
W 145 T35	BP5HS	
W 145 TR3	BR6S	
W 145 TR30	BPR5ES	
W 160 T2	B6ES	
W 160 T30	BP5ES	
W 175 T1	B6HS	Q203
W 175 T2	B6ES	
W 175 T3	B6S	Q302
W 175 T7	BP6HS	
W 175 T30	BP6ES	
W 175 T35	BP6HS	
W 175 TR1	BR6HS	Q209
W 175 TR2	BR6ES	
W 175 TR30	BPR6ES	
W 175 TR35	BPR6HS	Q214

BOSCH	→ NGK	Quick
W 175 Z1	B6HS	Q203
W 190 M11S	BR6HIX	
W 200 T27	BP6ES	
W 200 T30	BP6ES	
W 200 T35	BP6HS	
W 200 TR30	BPR6ES	
W 215 P21	BPR7EIX	
W 215 T30	BP6ES	
W 220 T30	BP6ES	
W 225 S1S	BR7HIX	
W 225 S2S	BR7EIX	
W 225 T1	B7HS	Q204
W 225 T2	B7ES	
W 225 T3	B7S	
W 225 T7	BPR7HS	Q215
W 225 T30	BP8ES	
W 225 T35	BP7HS	
W 225 TR1	BR7HS	Q211
W 225 TR2	BR7ES	
W 225 TR30	BPR7ES	
W 235 T28	BP8ES	
W 240 M1	B8HS	Q205
W 240 MZ1	B8HS	Q205
W 240 T1	B8HS	Q205
W 240 T2	B8ES	Q201
W 240 T3	B7S	
W 240 T28	B8ES	Q201
W 250 T1	B8HS	Q205
W 250 T2	B8ES	Q201
W 250 TR2	BR8ES	Q207
W 260 M1	B8HS	Q205
W 260 MZ1	B8HS	Q205
W 260 MZ2	B9ES	Q202
W 260 S1S	BR8HIX	
W 260 S2S	BR8EIX	
W 260 T1	B8HS	Q205
W 260 T2	B8ES	Q201
W 260 T20	B8ES	Q201
W 260 T30	BP8ES	
W 265 P21	BPR9EIX	
W 275 T1	B8HS	Q205
W 275 T2	B9ES	Q202
W 280 MZ1	B8HS	Q205
W 280 MZ2	B9ES	Q202
W 280 P21	BP8ES	
W 280 S1S	BR9HIX	
W 280 S2S	BR9EIX	
W 280 T30	BP8ES	
W 300 MZ2	B10ES	
W 300 T1	B9HS	
W 300 T2	B10ES	
W 310 S1S	BR9HIX	





BOSCH	→ NGK	Quick
W 310 S2S	BR10EIX	
W 330 T1	B9HS	
W 340 S1S	BR9HIX	
W 340 S2S	BR10EIX	
W 370 S1S	BR10HIX	
W 370 S2S	BR10EIX	
W 400 S1S	BR10HIX	
W 400 S2S	BR10EIX	
WA 175 T30	BP6EFS	
WA 200 T30	BP6EFS	
WEC	BUE	
WET 2	BUE	
WG 250 P21	BPR9EIX	
WG 250 T28	BPR8EIX	
WG 250 T30	BP8ES	
WG 265 T2SP	BPR9EIX	
WKA 145 T3	BM6A	Q303
WKA 145 T6	BPM6A	Q304
WKA 175 T3	BM6A	Q303
WKA 175 T6	BPM6A	Q304
WKA 225 T6	BPM7A	Q305
WR 2 CC	BR10ES	
WR 3 CC	BR9ES	Q208
WR 3 CS	BR9EIX	
WR 4 AC	BR8HS	Q212
WR 4 CC	BR8ES	Q207
WR 5 A	BR7HS	Q211
WR 5 AC	BR7HS	Q211
WR 5 C	BR7ES	
WR 5 CC	BR7ES	
WR 5 DC	BPR7ES	
WR 5 DC+	BPR7ES	
WR 5 DS	BPR7EIX	
WR 6 BC	BPR6HS	Q214
WR 6 DC	BPR6ES	
WR 6 DC+	BPR6ES	
WR 6 DCX	BPR6ES-11	
WR 6 DS	BPR6EIX	
WR 7 A	BR6HS	Q209
WR 7 AC	BR6HS	Q209
WR 7 BC	BPR6HS	Q214
WR 7 BC+	BPR6HS	Q214
WR 7 C	BR6ES	
WR 7 CC	BR6ES	
WR 7 DC	BPR6ES	
WR 7 DC+	BPR6ES	
WR 7 DC2	BPR6ES	
WR 7 DCX	BPR6ES-11	
WR 7 DCX+	BPR6ES-11	
WR 7 DS	BPR6EIX	
WR 7 EC	BR6S	
WR 8 AC	BR5HS	

BOSCH	→ NGK	Quick
WR 8 BC	BPR5HS	
WR 8 BC+	BPR5HS	
WR 8 DC	BPR5ES	
WR 8 DC+	BPR5ES	
WR 8 DC0	BPR5ES	
WR 8 DC4	BPR5ES	
WR 8 DCX	BPR5ES-11	
WR 8 DCX+	BPR5ES-11	
WR 8 DS	BPR5EIX	
WR 8 E	BR6S	
WR 8 EC	BR6S	
WR 8 EP	BR6S	
WR 8 HP	ZGR5C	
WR 8 LC+	ZGR5A	
WR 9 A0	BR5HS	
WR 9 DC	BPR5ES	
WR 9 DC+	BPR5ES	
WR 9 DCX	BPR5ES-11	
WR 9 DCX+	BPR5ES-11	
WR 9 DS	BPR5EIX	
WR 9 E	BR6S	
WR 9 E0	BR6S	
WR 9 EC	BR6S	
WR 9 EC0	BR6S	
WR 9 H	ZGR5C	
WR 9 HC	ZGR5C	
WR 9 HP	ZGR5C	
WR 9 LC	ZGR5A	
WR 9 LS	ZGR5A	
WR 10 E	BR6S	
WR 10 F	BP-4	
WR 10 FC	BP-4	
WR 10 FCY	BP-4	
WR 10 FY	BP-4	
WR 11 E 0	BR4-LM	
WS 5 F	BPM7A	Q305
WS 6 E	BM6A	Q303
WS 6 F	BPM6A	Q304
WS 7 E	BM6A	Q303
WS 7 F	BPM6A	Q304
WS 8 E	BM6A	Q303
WS 8 F	BPM6A	Q304
WSR 6 E	BMR6A	Q307
WSR 9 E	BMR4A	Q306
WSR 9 EC	BMR4A	Q306
X 3 CP0	D9EA	
X 4 CS	D8EA	Q216
X 5 CC	D8EA	Q216
X 5 DC	DP7EA-9	
XR 2 AS	DR8HS	
XR 2 CS	DR8ES	Q217
XR 4 AS	DR8HS	





BOSCH	→ NGK	Quick
XR 4 CS	DR8ES	Q217
XR 4 DC	DPR8EA-9	Q221
XR 5 DC	DPR7EA-9	Q220
XR 6 CC	DR7EA	
XR 7 LDC	DPR7EA-9	Q220
YR 5 DDE	KR9CI	
YR 5 LDE	DCPR8EKC	
YR 6 LDE	DCPR8EKC	
+1	BPR6ES	
+3	BPR5ES	
+6	BKR5ES	
+8	BKR6ES	
+10	BPR6HS	Q214
+11	BKR6ES-11	
+12	BPR6ES	
+13	BKR6ES	
+15	BPR7ES	
+16	BPR5ES	
+17	PTR5A-13	
+19	BKR5ES-11	
+20	BPR5HS	
+21	BPR6ES-11	
+22	BPR5ES-11	
+27	BPR5ES-11	
+34	ZGR5A	
0 241 050 002	C6HSA	
0 241 056 501	C7E	
0 241 145 003	DP7EA-9	
0 241 145 500	DP7EA-9	
0 241 145 504	DP7EA-9	
0 241 145 507	D8EA	Q216
0 241 150 502	D8EA	Q216
0 241 209 003	B-4H	
0 241 219 536	BP-4	
0 241 219 540	B-4H	
0 241 219 541	B4ES	
0 241 219 543	B-4H	
0 241 219 554	B-4	
0 241 225 013	BP5ES	
0 241 225 545	BP5ES	
0 241 225 547	B4ES	
0 241 225 548	B-4	
0 241 225 549	B5HS	
0 241 225 550	BP5ES	
0 241 225 556	BP5ES	
0 241 225 582	BP5ES-11	
0 241 225 585	ZGR5A	
0 241 225 593	BP5ES	
0 241 229 059	ZGR5A	
0 241 229 061	BP5ES	
0 241 229 062	BP5ES	
0 241 229 560	BM6A	Q303

BOSCH	→ NGK	Quick
0 241 229 561	BPM6A	Q304
0 241 229 574	BP5ES	
0 241 229 578	BP5HS	
0 241 229 579	B5ES	
0 241 229 580	B6S	Q302
0 241 229 588	BP5ES	
0 241 229 596	BP5ES-11	
0 241 229 604	B5HS	
0 241 229 612	B5HS	
0 241 229 641	BP5HS	
0 241 229 684	BKR5ES	
0 241 229 714	BP5HS	
0 241 229 715	BP5ES	
0 241 229 926	BP5ES	
0 241 235 089	B6ES	
0 241 235 098	B6ES	
0 241 235 099	BPR6ES	
0 241 235 563	BP6ES	
0 241 235 564	BP6HS	
0 241 235 566	BM6A	Q303
0 241 235 567	BPM6A	Q304
0 241 235 574	B6ES	
0 241 235 585	BP6HS-10	
0 241 235 594	B6S	Q302
0 241 235 602	BP6ES	
0 241 235 635	BP6EFS	
0 241 235 636	BP6EFS	
0 241 235 668	BP6EFS	
0 241 235 681	BP6EFS	
0 241 235 736	BKR6ES	
0 241 235 753	BP6EFS	
0 241 235 754	BP6HS	
0 241 235 755	BP6ES	
0 241 240 524	BP6EFS	
0 241 240 530	BP6ES	
0 241 240 532	BP6HS	
0 241 240 539	BP6ES	
0 241 240 563	BP6EFS	
0 241 240 578	BP6EFS	
0 241 240 585	BKR6EIX	
0 241 240 587	BKR6ES	
0 241 240 600	BM6A	Q303
0 241 240 601	BPM6A	Q304
0 241 240 603	B6HS	Q203
0 241 240 611	BP6ES	
0 241 243 501	BPR6EIX	
0 241 245 553	BP7HS	
0 241 245 555	BPM7A	Q305
0 241 245 574	BR7HIX	
0 241 245 575	BR7EIX	
0 241 245 580	B7HS	Q204
0 241 245 581	B7ES	





BOSCH	→ NGK	Quick
0 241 245 592	B7S	
0 241 245 602	B7HS	Q204
0 241 245 603	B7ES	
0 241 245 619	BP7HS	
0 241 245 642	BCP7ES	
0 241 245 646	BP7HS-10	
0 241 245 655	BCP7ES	
0 241 245 656	BP7HS	
0 241 247 500	BPR7EIX	
0 241 248 531	B8HS	Q205
0 241 248 534	B8ES	Q201
0 241 248 538	B8ES	Q201
0 241 248 540	B8HS	Q205
0 241 250 502	BPR8EIX	
0 241 250 512	BPR8EIX	
0 241 252 521	BR8HIX	
0 241 252 522	BR8EIX	
0 241 256 512	B8HS	Q205
0 241 256 513	B9ES	Q202
0 241 256 514	BR8HIX	
0 241 256 515	BR9EIX	
0 241 256 517	BPR8EIX	
0 241 256 519	B8HS	Q205
0 241 256 522	B9ES	Q202
0 241 260 507	B9HS	
0 241 260 508	B10ES	
0 241 262 505	BR9HIX	
0 241 262 506	BR10EIX	
0 241 268 505	BR9HIX	
0 241 268 506	BR10EIX	
0 241 274 504	BR10HIX	
0 241 274 505	BR10EIX	
0 241 280 503	BR10EIX	
0 241 319 512	AB-6	
0 241 319 513	AB-6	
0 241 329 525	AB-6	
0 241 329 526	AB-6	
0 241 335 524	AB-7	
0 241 335 526	AB-7	
0 241 345 512	AB-7	
0 241 350 505	AB-7	
0 242 040 500	CR6HS	Q223
0 242 050 500	CR6HS	Q223
0 242 055 500	CR7HS	
0 242 055 501	CR7HSA	
0 242 055 502	CR7E	Q225
0 242 055 505	CR7HSA	
0 242 060 500	CR8HS	
0 242 060 501	CR8E	Q226
0 242 129 503	LZKAR7A	
0 242 129 508	LZKAR7A	
0 242 135 500	DPR7EA-9	Q220

BOSCH	→ NGK	Quick
0 242 140 500	DR7EA	
0 242 140 504	DCPR8EKC	
0 242 145 500	DPR7EA-9	Q220
0 242 145 501	DPR7EA-9	Q220
0 242 145 503	DCPR8EKC	
0 242 145 504	KR9CI	
0 242 145 516	DPR7EA-9	Q220
0 242 150 500	DR8HS	
0 242 150 501	DR8ES	Q217
0 242 150 505	DPR8EA-9	Q221
0 242 160 501	DR8ES	Q217
0 242 215 502	BR4-LM	
0 242 219 512	BP-4	
0 242 219 513	BP-4	
0 242 219 520	BP-4	
0 242 225 522	BR6S	
0 242 225 524	BPR5ES	
0 242 225 528	ZGR5C	
0 242 225 536	BR6S	
0 242 225 538	BPR5EIX	
0 242 225 539	ZGR5A	
0 242 225 548	BPR5ES-11	
0 242 225 550	BPR5ES	
0 242 225 553	BPR5ES	
0 242 225 554	BPR5ES-11	
0 242 225 582	BKR5ES	
0 242 225 599	BPR5ES	
0 242 225 612	BMR4A	Q306
0 242 225 624	BPR5ES-11	
0 242 225 859	BPR5ES	
0 242 225 861	BPR5ES	
0 242 229 524	BR6S	
0 242 229 530	BKR5ES-11	
0 242 229 531	BPR5ES	
0 242 229 534	BR5HS	
0 242 229 537	BPR5EIX	
0 242 229 538	BPR5ES	
0 242 229 543	BKR5ES-11	
0 242 229 555	BPR5ES	
0 242 229 557	BPR5ES-11	
0 242 229 566	BPR5ES-11	
0 242 229 568	BKR5ES	
0 242 229 570	BPR5ES	
0 242 229 587	BKR5ES	
0 242 229 589	BPR5HS	
0 242 229 594	BKR5ES	
0 242 229 598	BKR5EIX	
0 242 229 607	BPR5ES	
0 242 229 610	BPR5HS	
0 242 229 656	BPR5ES	
0 242 229 657	BPR5HS	
0 242 229 659	BKR5ES	





BOSCH	→ NGK	Quick
0 242 229 660	BKR5ES-11	
0 242 229 673	BKR5ES	
0 242 229 687	BPR5ES-11	
0 242 229 779	ZGR5A	
0 242 229 880	BPR5ES	
0 242 229 881	BPR5HS	
0 242 229 883	BKR5ES	
0 242 229 884	BKR5ES-11	
0 242 229 885	BPR5ES-11	
0 242 229 888	BKR5ES	
0 242 229 982	BPR5ES	
0 242 235 511	BPR6ES	
0 242 235 522	BPR6HS	Q214
0 242 235 525	BPR6EIX	
0 242 235 529	BPR6ES	
0 242 235 530	BPR6ES-11	
0 242 235 532	BR6ES	
0 242 235 533	BR6HS	Q209
0 242 235 535	BPR6HS	Q214
0 242 235 537	BPR6ES	
0 242 235 541	BPR6EIX	
0 242 235 544	BKR6ES-11	
0 242 235 546	BR6ES	
0 242 235 547	BKR6ES-11	
0 242 235 551	BKR6ES	
0 242 235 554	BR6S	
0 242 235 556	BKR6ES	
0 242 235 579	BKR6ES	
0 242 235 587	BKR6ES	
0 242 235 588	BKR6ES	
0 242 235 597	BKR6ES	
0 242 235 616	BKR6ES	
0 242 235 624	BKR6ES	
0 242 235 630	BPR6ES	
0 242 235 662	PTR5A-13	
0 242 235 663	BPR6ES	
0 242 235 665	BPR6HS	Q214
0 242 235 666	BKR6ES	
0 242 235 667	BKR6ES-11	
0 242 235 699	BKR6EIX	
0 242 235 707	BPR6ES-11	
0 242 235 767	PTR5A-13	
0 242 235 909	BPR6ES	
0 242 235 911	BPR6HS	Q214
0 242 235 912	BKR6ES	
0 242 235 913	BKR6ES-11	
0 242 235 915	BPR6ES-11	
0 242 235 916	PTR5A-13	
0 242 235 925	BKR6ES	
0 242 235 930	BPR6ES	
0 242 240 511	BPR6ES	
0 242 240 516	BPR6EIX	

BOSCH	→ NGK	Quick
0 242 240 521	BPR6ES	
0 242 240 526	BKR6ES	
0 242 240 530	BKR6ES	
0 242 240 531	BPR6ES-11	
0 242 240 532	BPR6ES-11	
0 242 240 533	BKR6ES-11	
0 242 240 539	BKR6ES-11	
0 242 240 561	BPR6HS	Q214
0 242 240 564	BKR7EKC	
0 242 240 565	BKR7EKC	
0 242 240 572	BKUR6ET	
0 242 240 579	BPR6ES	
0 242 240 582	BMR6A	Q307
0 242 240 592	BPR6ES	
0 242 240 593	BKR6ES	
0 242 240 605	BKR6ES	
0 242 240 849	BPR6ES	
0 242 240 850	BKR6ES	
0 242 240 851	BKR6ES	
0 242 245 015	BPR7EIX	
0 242 245 018	BKR7EKC	
0 242 245 514	BPR7EIX	
0 242 245 517	BR7HS	Q211
0 242 245 519	BPR7ES	
0 242 245 521	BR7ES	
0 242 245 537	BPR7ES	
0 242 245 539	BCPR7ET	
0 242 245 552	BPR7ES	
0 242 245 557	BR7ES	
0 242 245 812	BPR7ES	
0 242 250 503	BR8ES	Q207
0 242 250 506	BR8HS	Q212
0 242 250 517	BR8EIX	
0 242 255 502	BR9ES	Q208
0 242 255 504	BR9EIX	
0 242 260 001	BR10ES	
F 000 KE0 P34	BPR6ES	
F 000 KE0 P40	BKR6ES-11	
F 000 KE0 P41	BKR5ES-11	
BRISK	→ NGK	Quick
B 12 YC	DP9EA-9	
B 14 YC	DP8EA-9	
B 15 YC	DP7EA-9	
D 12 YC	BCP7ES	
D 14 Y	BCP7ES	
D 14 YC	BCP7ES	
DR 12 YC	BKR7E	
DR 14 YC	BKR7E	
DR 14 ZC	ZFR7F-11	
DR 15 YC	BKR6ES	





BRISK	→ NGK	Quick
DR 15 Z	BKR6ES	
DR 15 Z 1	BKR6ES-11	
DR 17 YC	BKR5ES	
G 15 Y	BP6EFS	
G 15 YC	BP6EFS	
JR 17	BR4-LM	
JR 19	BR2-LM	Q310
K 17 C	B6S	Q302
K 19	B-4	
L 08 JW	BR10EIX	
L 08 W	BR10EIX	
L 10 JW	BR8EIX	
L 12 W	BR9EIX	
L 12 Y	BP8ES	
L 12 YC	BP8ES	
L 14	B8ES	Q201
L 14 C	B8ES	Q201
L 15	B7ES	
L 15 C	B7ES	
L 15 W	BR7EIX	
L 15 Y	BP6ES	
L 15 YC	BP6ES	
L 17	B6ES	
L 17 C	B6ES	
L 17 W	BR7EIX	
L 17 Y	BP5ES	
L 17 YC	BP5ES	
L 19 C	B5ES	
LR 12 YC	BPR8ES	Q213
LR 12 ZC	BPR8ES	Q213
LR 14 YC	BPR7ES	
LR 14 ZC	BPR7ES	
LR 15 YC	BPR6ES	
LR 15 Z	BPR6ES	
LR 15 Z 1	BPR6ES-11	
LR 17 YC	BPR5ES	
N 08 W	BR10HIX	
N 12 W	BR9HIX	
N 12 Y	BP8HS	
N 12 YC	BP8HS	
N 14	B8HS	Q205
N 14 C	B8HS	Q205
N 14 Y	BP7HS	
N 14 YC	BP7HS	
N 15	B7HS	Q204
N 15 C	B7HS	Q204
N 15 W	BR8HIX	
N 15 Y	BP6HS	
N 15 YC	BP6HS	
N 17	B6HS	Q203
N 17 C	B6HS	Q203
N 17 W	BR7HIX	

BRISK	→ NGK	Quick
N 17 Y	BP5HS	
N 17 YC	BP5HS	
N 19	B5HS	
N 19 C	B5HS	
NR 12 YC	BPR8HS	
NR 15 YC	BPR6HS	Q214
P 15 Y	BPM7A	Q305
P 17	BM6A	Q303
P 17 Y	BPM6A	Q304
CHAMPION	→ NGK	Quick
A 4 HC	DP9EA-9	
A 5 YC	DP9EA-9	
A 6	D8EA	Q216
A 6 G	DR8EIX	
A 6 GC	DR8EIX	
A 6 HC	DP8EA-9	
A 6 Y	DP8EA-9	
A 6 YC	DP8EA-9	
A 8	D7EA	
A 8 Y	DP7EA-9	
A 8 YC	DP7EA-9	
A 10	D7EA	
A 59 C	D9EA	
A 59 G	DR9EIX	
A 59 GC	DCPR9EIX	
A 61	D9EA	
A 61 G	DR9EIX	
BN 7 Y	BP6EFS	
BN 9 Y	BP6EFS	
BN 89 Y	BP6EFS	
C 6 VPYC	BKR7EIX-11	
C 6 YCC	BCP7ES	
C 7 Y	BCP7ES	
C 7 YC	BCP7ES	
C 7 YCC	BCP7ES	
C 7 YCX	BCP7ES	
C 55	R7436-10	
C 55 R	R7436-10	
C 57 A	R7436-10	
C 57 JC4	R7436-10	
CJ 6 Y	BPM7A	Q305
CJ 7 Y	BPM7A	Q305
CJ 8	BM6A	Q303
CJ 8 Y	BPM6A	Q304
CJ 11	BM6A	Q303
CJ 86	BM6A	Q303
D 6	AB-8	
D 9	AB-6	
D 9 J	AB-6	
D 10	AB-6	





CHAMPION	→ NGK	Quick
D 14	AB-6	
D 16	AB-6	
D 16 J	AB-6	
D 21	AB-6	
D 23	AB-6	
EON 1	BKR6ES	
EON 2	BKR5ES	
EON 5	BPR6ES	
EON 6	BPR5ES	
FN 507 Y	BCP7ES	
G 1	C9E	
G 2	C8E	
G 54 V	R0045Q-10	
G 55	C9E	
G 56 R	R0373A-10	
G 58	C9E	
G 59 C	C7E	
G 61	C8E	
G 63	C8E	
G 63 R	CR8EIX	
H 03	B6S	Q302
H 8	B-6L	
H 8 C	B-6L	
H 8 J	B-6L	
H 10	B-6L	
H 10 C	B-6L	
H 10 J	B-6L	
J 4	B7S	
J 4 C	B7S	
J 4 J	B7S	
J 5	B7S	
J 6	B6S	Q302
J 6 C	B6S	Q302
J 6 J	B6S	Q302
J 7	B6S	Q302
J 7 J	B6S	Q302
J 8	B6S	Q302
J 8 C	B6S	Q302
J 8 J	B6S	Q302
J 11	B-4	
J 11 C	B-4	
J 11 J	B-4	
J 18 Y	BP-4	
J 18 YC	BP-4	
K 3 G	AB-8	
K 5 G	AB-8	
K 7	AB-8	
K 8	AB-8	
K 8 G	AB-8	
K 9	AB-7	
K 13	AB-6	
K 15 J	AB-6	

CHAMPION	→ NGK	Quick
L 2 G	BR9HIX	
L 3 G	BR8HIX	
L 4 G	BR7HIX	
L 4 J	B7HS	Q204
L 5	B7HS	Q204
L 6 G	BR7HIX	
L 7 J	B6HS	Q203
L 9 G	BR6HIX	
L 9 J	B6HS	Q203
L 10	B6HS	Q203
L 12 Y	BP5HS	
L 14	B-4H	
L 15 Y	BP4HS	
L 55 G	BR10HIX	
L 61 Y	BP8HS	
L 64 Y	BP7HS	
L 66 Y	BP6HS	
L 77 J	B7HS	Q204
L 77 JC	B7HS	Q204
L 78	B7HS	Q204
L 78 C	B7HS	Q204
L 78 YC	BP7HS-10	
L 81	B7HS	Q204
L 81 Y	BP7HS	
L 82	B6HS	Q203
L 82 C	B6HS	Q203
L 82 Y	BP6HS	
L 82 YC	BP6HS	
L 82 YCC	BP6HS	
L 85	B6HS	Q203
L 85 Y	BP6HS	
L 86	B6HS	Q203
L 86 C	B6HS	Q203
L 86 CC	B6HS	Q203
L 87 Y	BP6HS	
L 87 YC	BP6HS	
L 87 YCC	BP6HS	
L 90	B5HS	
L 90 C	B5HS	
L 92 Y	BP5HS	
L 92 YC	BP5HS	
L 95 Y	BP4HS	
L 288	B5HS	
N 1	B10ES	
N 1 C	B10ES	
N 2	B9ES	Q202
N 2 C	B9ES	Q202
N 2 G	BR9EIX	
N 3	B8ES	Q201
N 3 C	B8ES	Q201
N 3 G	BR8EIX	
N 4	B7ES	





CHAMPION	→ NGK	Quick
N 4 C	B7ES	
N 4 G	BR7EIX	
N 5	B6ES	
N 5 C	B6ES	
N 6	B6ES	
N 6 GY	BPR8EIX	
N 6 Y	BP8ES	
N 6 YC	BP8ES	
N 6 YCC	BP8ES	
N 7	B7ES	
N 7 GY	BPR7EIX	
N 8	B6ES	
N 8 GY	BPR6EIX	
N 8 L	ZGR5C	
N 8 Y	BP6ES	
N 9 Y	BP6ES	
N 9 YC	BP6ES	
N 9 YCC	BP6ES	
N 9 YCE	BP5ES	
N 9 YCX	BP6ES	
N 10 PY	BPR6EIX	
N 10 Y	BP6ES	
N 10 YC	BP5ES	
N 11 Y	BP5ES	
N 11 YC	BP5ES	
N 11 YC4	BP5ES-11	
N 11 YCC	BP5ES	
N 12 Y	BP5ES	
N 12 YC	BP5ES	
N 12 YCC	BP5ES	
N 13 L	ZGR5C	
N 13 Y	BP5ES	
N 14 LY	ZGR5C	
N 14 Y	BP5ES	
N 19 V	BUE	
N 21	B4ES	
N 54 R	B10EG	
N 55 G	B105EGV	
N 57	B10ES	
N 57 G	B105EGV	
N 57 R	B10EG	
N 59 G	B95EGV	
N 60	B9ES	Q202
N 60 R	B8EG	
N 62 R	B8EG	
N 64 Y	BP8ES	
N 66 Y	BP6ES	
N 79 Y	BP6ES	
N 80	B10EG	
N 80 G	BR10EIX	
N 82	B10EG	
N 82 G	B105EGV	

CHAMPION	→ NGK	Quick
N 84	B9EG	
N 84 G	B95EGV	
N 86	B9EG	
N 86 G	BR9EIX	
N 87	B8EG	
N 87 G	BR8EIX	
N 89 GY	BP6ES	
N 89 Y	BP5ES	
N 281 YC	BP6ES	
N 288	B5ES	
OE 001	BP6ES	
OE 002	BKR6ES	
OE 004	BPR6ES	
OE 005	BKR6ES	
OE 006	BPR6ES	
OE 007	BP6HS	
OE 008	BPR7ES	
OE 009	BP6EFS	
OE 013	BKR5ES	
OE 015	BP5ES	
OE 016	BKR6ES	
OE 017	BCP7ES	
OE 018	BPR7ES	
OE 022	BP6ES	
OE 030	BKR6EKC	
OE 031	PTR5A-13	
OE 034	BKR6ES	
OE 036	BP6EFS	
OE 037	B6HS	Q203
OE 038	BP6HS	
OE 039	BKR6ES-11	
OE 040	B9ES	Q202
OE 042	BPR5ES	
OE 045	BPR5ES	
OE 048	BPR6ES-11	
OE 049	BPR5ES-11	
OE 051	BPR5ES	
OE 052	DCPR9EIX	
OE 055	BP5ES	
OE 058	BCP7ES	
OE 059	BP5HS	
OE 063	BKR6ES-11	
OE 064	BPR6HS	Q214
OE 065	BP5ES	
OE 068	B8ES	Q201
OE 070	BP6HS	
OE 071	BPR6HS	Q214
OE 074	B6ES	
OE 075	BCP7ES	
OE 078	BR8EIX	
OE 079	B7ES	
OE 084	BP8ES	





CHAMPION	→ NGK	Quick
OE 086	BR6HS	Q209
OE 087	BP8ES	
OE 091	BR9ES	Q208
OE 092	CR9E	Q227
OE 096	B6HS	Q203
OE 098	BR7ES	
OE 103	DCPR9EIX	
OE 104	BP6HS	
OE 106	BP5ES	
OE 108	BR8ES	Q207
OE 111	BPR6ES	
OE 112	DR8EIX	
OE 116	BPR8ES	Q213
OE 119	BKR6ES	
OE 122	PMR7A	
OE 125	BR9EIX	
OE 129	BKR7EIX-11	
OE 132	DP8EA-9	
OE 141	BKR6EIX	
OE 156	ZGR5C	
OE 162	BR6ES	
OE 166	C7E	
OE 172	B9EG	
OE 174	PTR5A-13	
OE 199	DCPR8E	
ON 3	BR8ES	Q207
ON 11 Y	BP5ES	
ON 12 Y	BP5ES	
P 7	D8HA	
P 7 G	DR8HS	
P 7 Y	D8HA	
P 8 Y	D6HA	
P 10 Y	D6HA	
PA 5 HC	D7EA	
PA 7 HC	D7EA	
PG 2 PHP	PMR8A	
PG 4 PHP	PMR7A	
PG 7 C	C7E	
PL 7 YC4	BP6HS-10	
PL 9 YC	BP6HS	
PN 5 C	B8ES	Q201
PRL 5 SC	BR6HSA	Q210
PRZ 9 HC	CR7HSA	
PZ 7 HC	C7HSA	
PZ 9 HC	C6HSA	
Q 504 V	R2349-10	
QC 10 WEP	IZFR6F11	
QC 12 YC	BKR5ES	
QJ 17 LM	BR4-LM	
QJ 19 LM	BR2-LM	Q310
QL 7 J5	BR6HS	Q209
QL 77 CC	BR8HS	Q212

CHAMPION	→ NGK	Quick
QL 78 C	BR7HS	Q211
QL 78 YC	BPR7HS	Q215
QL 82 C	BR6HS	Q209
QL 82 YC	BPR6HS	Q214
QL 86	BR6HS	Q209
QL 86 C	BR6HS	Q209
QL 87 YC	BPR6HS	Q214
QN 2	BR9ES	Q208
QN 2 C	BR9ES	Q208
QN 2 G	BR9EIX	
QN 3	BR8ES	Q207
QN 3 C	BR8ES	Q207
QN 84	BR9EG	
QN 86	BR8EG	
R 6	D8EA	Q216
R 6 G	DR8EIX	
R 6 J	D8EA	Q216
R 8	D7EA	
R 10	D6EA	
RA 2 HC	DPR7EA-9	Q220
RA 4 HCC	DCPR8E	
RA 4 HXC	DCPR9EIX	
RA 6	DR8ES-L	Q218
RA 6 Y	DPR7EA-9	Q220
RA 6 YC	DPR7EA-9	Q220
RA 7 YC	DCPR8E	
RA 8 GHC	DCPR6E	
RA 8 HC	DCPR7E	
RA 8 Y	DPR7EA-9	Q220
RA 8 YC	DPR7EA-9	Q220
RA 59 GC	DCPR9EIX	
RA 59 PP	DCPR9EIX	
RAX 92 C	DR9EA	Q219
RAX 92 DC	JR9C	
RAX 92 YC	DPR7EA-9	Q220
RAX 94 C	DR8EA	
RAX 94 YC	DPR7EA-9	Q220
RAX 96 C	DR7EA	
RAX 96 YC	DPR7EA-9	Q220
RC 6 VPYC	BKR7EIX-11	
RC 7 GYC	BKR7EIX-11	
RC 7 GYG	BKR6EIX	
RC 7 YC3	BKR7E	
RC 8 BYC	BKR6EKC	
RC 8 YCC	BKR6ES	
RC 8 YCL	BKR6ES	
RC 9 YC	BKR6ES	
RC 9 YC4	BKR6ES-11	
RC 9 YCC	BKR6ES	
RC 10 PYC	BKR6EIX	
RC 10 YC4	BKR6ES-11	
RC 10 YCC	BKR6ES	





CHAMPION	→ NGK	Quick
RC 12 YC	BKR5ES	
RC 14 YC	BKR5ES	
RC 87 YC	BKR6ES	
RCJ 8	BMR6A	Q307
RD 9	AB-6	
RD 14	AB-6	
RD 16	AB-6	
RD 16 J	AB-6	
RE 7 PYC5	PTR5A-13	
RE 7 YCC	PTR5A-13	
RE 10 PMC5	PTR5A-13	
RE 10 YC4	BKR5ES-11	
RES 9 YCC4	PTR5A-13	
RG 2 PHP	CR8EIX	
RG 4 HC	CR9E	Q227
RG 4 PHP	PMR7A	
RG 6 YC	CR8EB	
RG 6 YCA	CPR8E	
RG 6 YCH	CPR8E	
RG 92 C	CR9E	Q227
RG 92 DC	CR9EK	Q230
RG 94 C	CR8E	Q226
RGU 92 C	CR9EH-9	Q229
RGU 94 C	CR8EH-9	Q228
RH 10 C	B-6L	
RJ 6	BR6S	
RJ 6 C	BR6S	
RJ 6 J	BR6S	
RJ 7	BR6S	
RJ 8	BR6S	
RJ 8 C	BR6S	
RJ 8 J	BR6S	
RJ 11	BR6S	
RJ 12	BR6S	
RJ 17 LM	BR4-LM	
RJ 18 Y	BP-4	
RJ 18 YC	BP-4	
RJ 19 LMC	BR2-LM	Q310
RJ 20 Y	BP-4	
RL 4 J	BR7HS	Q211
RL 7 J	BR6HS	Q209
RL 12 Y	BPR6HS	Q214
RL 19	BR5HS	
RL 77 J	BR7HS	Q211
RL 78	BR7HS	Q211
RL 78 C	BR7HS	Q211
RL 82	BR6HS	Q209
RL 82 C	BR6HS	Q209
RL 82 Y	BPR6HS	Q214
RL 82 YC	BPR6HS	Q214
RL 82 YCC	BPR6HS	Q214
RL 85	BR6HS	Q209

CHAMPION	→ NGK	Quick
RL 86	BR6HS	Q209
RL 86 C	BR6HS	Q209
RL 87 Y	BPR6HS	Q214
RL 87 YC	BPR6HS	Q214
RL 90	BR5HS	
RL 95 YC	BPR5HS	
RN 1 C	BR10ES	
RN 2	BR9ES	Q208
RN 2 C	BR9ES	Q208
RN 2 G	BR9EIX	
RN 3	BR8ES	Q207
RN 3 C	BR8ES	Q207
RN 3 G	BR8EIX	
RN 4	BR7ES	
RN 4 C	BR7ES	
RN 5	BR6ES	
RN 5 C	BR6ES	
RN 6	BR6ES	
RN 6 Y	BPR8ES	Q213
RN 6 YC	BPR8ES	Q213
RN 7 GY	BPR7EIX	
RN 7 Y	BPR7ES	
RN 7 YC	BPR7ES	
RN 7 YCC	BPR7ES	
RN 8 L	ZGR5C	
RN 9 GY	BPR6EIX	
RN 9 Y	BPR6ES	
RN 9 YC	BPR6ES	
RN 9 YC4	BPR6ES-11	
RN 9 YCC	BPR6ES	
RN 10 GY	BPR6EIX	
RN 10 Y	BPR6ES	
RN 10 Y4	BPR6ES-11	
RN 10 YC	BPR6ES	
RN 11 Y	BPR5ES	
RN 11 YC	BPR5ES	
RN 11 YC4	BPR5ES-11	
RN 11 YCC	BPR5ES	
RN 12 GY	BPR5EIX	
RN 12 Y	BPR5ES	
RN 12 YC	BPR5ES	
RN 12 YC4	BPR5ES-11	
RN 12 YCC	BPR5ES	
RN 13 L	ZGR5C	
RN 13 LYC	ZGR5C	
RN 14 LY	ZGR5C	
RN 14 Y	BPR5ES	
RN 16 Y	BPR4ES	
RN 57 YC	BR10EG	
RP 7	DR8HS	
RZ 94 C	CR8HSA	
RZ 96 C	CR7HSA	





CHAMPION	→ NGK	Quick
S 9 YC	BP6EFS	
S 9 YCC	BP6EFS	
S 279 YC	BP6EFS	
S 281 YC	BP6EFS	
UD 16	AB-6	
UJ 2 J	B8S	
UJ 4 J	B7S	
UJ 6	B6S	Q302
UJ 8	B6S	Q302
UJ 81 C	B7S	
UJ 81 J	B7S	
UK 10	AB-6	
UL 4 J	B7HS	Q204
UL 18 V	BUHX	
UL 81 C	B7HS	Q204
UL 81 J	B7HS	Q204
UL 82 Y	BP7HS	
UN 19 V	BUE	
UN 79 Y	BP6ES	
Z 6	C8HSA	
Z 7 G	CR7HIX	
Z 8	C7HSA	
Z 9 Y	C7HSA	
Z 10	C6HSA	
Z 10 G	CR7HIX	
Z 12	C6HSA	
DAYTONA	→ NGK	Quick
61 479	BR8EIX	
61 480	BR9EIX	
61 481	CR8EIX	
61 482	B8HCS	
61 483	CR8EHIX-9	
61 484	CR9EHIX-9	
61 485	CR6HIX	
61 486	CR7HIX	
61 487	CR8HIX	
61 488	DR8EIX	
61 489	DR9EIX	
61 490	BPR6HIX	
61 491	BPR7HIX	
61 492	BPR8HIX	
61 493	DPR7EIX-9	
61 494	DPR8EIX-9	
DENSO	→ NGK	Quick
IAE 01-32	R7282-105	
IK 16	BKR5EIX-11	
IK 20	BKR6EIX-11	
IK 27 C 11	FR9BI-11	
IQ 01-31	R7436-10	
IQ 02-31	R7436-10	

DENSO	→ NGK	Quick
IT 20	TR6IX	
IU 01-31	R0373A-10	
IU 22	CR7EIX	
IU 24	CR8EIX	
IU 27	B8HCS	
IU 27 D	CR9EIA-9	
IUF 22	CR7HIX	
IUF 24	CR8HIX	
IUH 24	CR8EHIX-9	
IUH 27	CR9EHIX-9	
IUH 27 D	IMR9A-9H	
IW 01-27	R7376-9	
IW 01-31	R7376-10	
IW 06-27	R7376-9	
IW 06-31	R7376-10	
IW 16	BPR5EIX-11	
IW 20	BPR6EIX-11	
IW 22	BPR7EIX	
IW 24	BR8EIX	
IW 27	BR9EIX	
IW 31	BR10EIX	
IWF 20	BPR6HIX	
IWF 22	BR7HIX	
IWF 24	BR8HIX	
IWF 27	BR9HIX	
IWM 01-32	R7282-105	
IWM 24	BR8ECMIX	
IWM 27	BR9ECMIX	
IWM 31	BR10ECMIX	
IX 22	DR7EIX	
IX 22 B	DPR7EIX-9	
IX 24	DR8EIX	
IX 24 B	DPR8EIX-9	
IX 27	DR9EIX	
IX 27 B	DPR9EIX-9	
IXU 01-27	R2525-9	
IXU 22	DCPR7EIX	
IY 24	ER8EHIX	
IY 27	ER9EHIX	
J 16 CR-U	ZGR5A	
K 16 PR-P 11	BKR5EIX	
K 16 PR-TP 11	BKR5EIX-11	
K 16 PRZ-U 11	BKR5EIX-11	
K 16 RZ-U 11	BKR5EIX-11	
K 20 PBR	BKUR6ET	
K 20 PR-TP 11	BKR6EIX-11	
K 20 PRZ-U 11	BKR6EIX-11	
K 20 RZ	BKR6EIX	
K 20 RZ-U 11	BKR6EIX-11	
K 20 TNR	BKR6EKC	
K 22 PR-TP 11	BKR7EIX-11	
K 22 PR-U	BKR7E	





DENSO	→ NGK	Quick
K 22 PR-U 11	BKR7E-11	
K 22 PRUR	BKR7E	
K 22 PRZ-U	BKR7EIX	
K 22 PRZ-U 11	BKR7EIX-11	
K 22 TNR	BKR7EKC	
KJ 22 CR 11	ZFR7F-11	
KJ 22 CR-L 11	ZFR7F-11	
L 14 U	AB-6	
M 17	AB-6	
M 22	AB-7	
M 24 S	AB-8	
MW 17	AB-6	
MW 22	AB-7	
PKJ 20 CR 8	PZFR6F	
PT 16 VR 13	PTR5A-13	
Q 22 PR-P 11	BKR7EIX-11	
Q 22 PRZ-U 11	BKR7EIX-11	
Q 22 P-U	BCP7ES	
Q 22 P-U 11	BKR7E-11	
QJ 22 CR 11	ZFR7F-11	
RU 01-31	R0045Q-10	
SF 10	BUHX	
T 20 EP-U	BP6EFS	
T 20 EX-U	BP6EFS	
TR 20	B6HS	Q203
TR 22	B7HS	Q204
TR 24	B8HS	Q205
U 20 EPR-9	CPR6EA-9	
U 20 ESR-N	CR6E	
U 20 FS	C6HSA	
U 20 FSL	C6HSA	
U 20 FSRL	CR6HS	Q223
U 20 FSR-U	CR6HSA	
U 20 FS-U	C6HSA	
U 21 FB	C6HSA	
U 22 EPR-U	CPR7EA-9	
U 22 ESN	C7E	
U 22 ESRN	CR7E	Q225
U 22 ETR	CR7EK	
U 22 FER 9	CR7EH-9	
U 22 FS	C7HSA	
U 22 FSG-U	CR7HIX	
U 22 FSL	C7HSA	
U 22 FSRL	CR7HS	
U 22 FSR-U	CR7HSA	
U 22 FS-U	C7HSA	
U 22 FSZ-U	CR7HIX	
U 24 ESN	C8E	
U 24 ESRN	CR8E	Q226
U 24 ESRNB	CR8EB	
U 24 ESRNZ-U	CR8EIX	
U 24 ETR	CR8EK	

DENSO	→ NGK	Quick
U 24 FB	C8HSA	
U 24 FE 9	C8EH-9	
U 24 FER 9	CR8EH-9	Q228
U 24 FER 9 S	CR8EH-9S	
U 24 FERZ-U 9	CR8EHIX-9	
U 24 FS	C8HSA	
U 24 FSL	C8HSA	
U 24 FSR-U	CR8HS	
U 24 FS-U	C8HSA	
U 27 ESN	C9E	
U 27 ESRNZ-U	CR9EIX	
U 27 ESRN	CR9E	Q227
U 27 ESRNB	CR9EB	
U 27 ESRNZ-U	CR9EIX	
U 27 ETR	CR9EK	Q230
U 27 FER 9	CR9EH-9	Q229
U 27 FERZ-U 9	CR9EHIX-9	
U 27 FEZ-U 9	CR9EHIX-9	
U 31 ESRN	CR10E	
U 31 ETR	CR10EK	
VK 16 PRZ 11	IFR5L11	
VK 20 PRZ 11	IFR6L11	
VK 24 PRZ 11	IFR8H11	
VK 27 PRZ 11	IFR9H11	
VKJ 20 RZ-M 11	IZFR6F11	
VNH 27 Z	IMR9B-9H	
VUH 24 D	IMR8C-9H	
VUH 27 D	IMR9C-9H	
VUH 27 ES	IMR9C-9HES	
VUH 27 Z	IMR9A-9H	
VX 22 BC	IJR7A9	
VX 22 BZ	IJR7A9	
W 9 EPR	BPR2ES	
W 9 EXR-U	BPR2ES	
W 9 LMRUS	BR2-LM	Q310
W 9 P	BP-4	
W 9 PR-U	BP-4	
W 9 P-U	BP-4	
W 14	B-4	
W 14 E	B4ES	
W 14 EPR	BPR4ES	
W 14 EPR-U	BPR4ES	
W 14 EXR-U	BPR4EY	
W 14 F	B-4H	
W 14 FP	BP-4H	
W 14 FPL	BP4HS	
W 14 FPLUL	BP4HA	
W 14 FPRL	BPR4HS	
W 14 FPR-UL	BPR4HS	
W 14 FP-U	BP-4H	
W 14 FP-UL	BP4HS	
W 14 F-U	B-4H	





DENSO	→ NGK	Quick
W 14 LMR-US	BR4-LM	
W 14 MR-U	BMR4A	Q306
W 14 PR-U	BP-4	
W 14 P-U	BP-4	
W 14 U	B-4	
W 14 U 10	B-4	
W 14 US	B-4	
W 16 EP	BP5ES	
W 16 E-P 11	BP5ES-11	
W 16 EPG-U	BPR5EIX	
W 16 EPR	BPR5ES	
W 16 EPR 11	BPR5ES-11	
W 16 EPR-U	BPR5ES	
W 16 EPR-U 11	BPR5ES-11	
W 16 EP-U	BP5ES	
W 16 EP-U 10	BP5ES-11	
W 16 EPZ-U	BPR5EIX	
W 16 ES	B5ES	
W 16 ES-U	B5ES	
W 16 ETRS	BPR5EIX-11	
W 16 EXRZ-U	BPR5EIX	
W 16 EXZ-U	BPR5EIX	
W 16 FP	BP5HS	
W 16 FPR	BPR5HS	
W 16 FPR-U	BPR5HS	
W 16 FP-U	BP5HS	
W 16 FS	B5HS	
W 16 FSR	BR5HS	
W 16 FS-U	B5HS	
W 16 LS	B-6L	
W 17	B6S	Q302
W 17 ES	BR6ES	
W 17 FP	BP6HS	
W 20 EP	B6ES	
W 20 EPG-U	BPR6EIX	
W 20 EPR	BPR6ES	
W 20 EPR 11	BPR6ES-11	
W 20 EPR-U	BPR6ES	
W 20 EPR-U 10	BPR6ES-11	
W 20 EPR-U 11	BPR6ES-11	
W 20 EPRZ-U	BPR6EIX	
W 20 EPRZ-U 11	BPR6EIX-11	
W 20 EP-U	BP6ES	
W 20 EPZ-U	BPR6EIX	
W 20 ES	B6ES	
W 20 ESL	BR6ES	
W 20 ESR	BR6ES	
W 20 ESRL	BR6ES	
W 20 ES-U	B6ES	
W 20 EXR-U 13	BPR6EIX-11	
W 20 EXRZ-U	BPR6EIX	
W 20 EXZ-U	BPR6EIX	

DENSO	→ NGK	Quick
W 20 FP	BP6HS	
W 20 FPL	BP6HSA	
W 20 FPR	BPR6HS	Q214
W 20 FPRL	BPR6HSA	
W 20 FPR-U	BPR6HS	Q214
W 20 FPR-U 10	BPR6HS-10	
W 20 FPRU-L 10	BPR6HS-10	
W 20 FP-U	BP6HS	
W 20 FP-U 10	BP6HS-10	
W 20 FRL	BR6HSA	Q210
W 20 FS	B6HS	Q203
W 20 FSG-U	BR6HIX	
W 20 FSR	BR6HS	Q209
W 20 FSR-U	BR6HS	Q209
W 20 FS-U	B6HS	Q203
W 20 FSZ-U	BR6HIX	
W 20 M	BM6A	Q303
W 20 MP-U	BPM6A	Q304
W 20 MR-U	BMR6A	Q307
W 20 M-U	BM6A	Q303
W 20 MUS	BM6A	Q303
W 20 S	B6S	Q302
W 20 SR-U	BR6S	
W 20 S-U	B6S	Q302
W 22	B7S	
W 22 EPG-U	BPR7EIX	
W 22 EPR	BPR7ES	
W 22 EPR-U	BPR7ES	
W 22 EPRZ-U	BPR7EIX	
W 22 EPZ-U	BPR7EIX	
W 22 ES	B7ES	
W 22 ESG-U	BR7EIX	
W 22 ESL	BR7ES	
W 22 ESR	BR7ES	
W 22 ESRL	BR7ES	
W 22 ESR-U	BR7ES	
W 22 ES-U	B7ES	
W 22 ESZ-U	BR7EIX	
W 22 EXR-U	BPR7EIX	
W 22 FP	BP7HS	
W 22 FPR	BPR7HS	Q215
W 22 FPR-U	BPR7HS	Q215
W 22 FPRZ-U	BPR7HIX	
W 22 FP-U	BP7HS	
W 22 FP-U 10	BP7HS-10	
W 22 FPUS	BP7HS	
W 22 FS	B7HS	Q204
W 22 FSG-U	BR7HIX	
W 22 FSR	BR7HS	Q211
W 22 FSR-U	BR7HS	Q211
W 22 FS-U	B7HS	Q204
W 22 FSZ-U	BR7HIX	





DENSO	→ NGK	Quick
W 22 MP-U	BPM7A	Q305
W 22 MPUS	BPM7A	Q305
W 22 S	B7S	
W 22 S-U	B7S	
W 24	B8S	
W 24 EMRC	BR8ECM	
W 24 EP	BP8ES	
W 24 E-P 11	BP8ES	
W 24 EPR	BPR8ES	Q213
W 24 EPR-U	BPR8ES	Q213
W 24 EPRZ-U	BPR8EIX	
W 24 EP-U	BP8ES	
W 24 ES	B8ES	Q201
W 24 ESG-U	BR8EIX	
W 24 ESR	BR8ES	Q207
W 24 ESRV	BR8EG	
W 24 ESRZ-U	BR8EIX	
W 24 ES-U	B8ES	Q201
W 24 ES-U 11	B8ES	Q201
W 24 ESV	B8EG	
W 24 ESZ-U	BR8EIX	
W 24 FP	BP8HS	
W 24 FPL	BPR8HSA	
W 24 FPR	BPR8HS	
W 24 FPRL	BPR8HSA	
W 24 FP-U	BP8HS	
W 24 FRL	BR8HSA	
W 24 FS	B8HS	Q205
W 24 FSG-U	BR8HIX	
W 24 FSR	BR8HS	Q212
W 24 FSR-U 10	BR8HS-10	
W 24 FS-U	B8HS	Q205
W 24 FSZ-U	BR8HIX	
W 24 S	B8S	
W 24 S-U	B8S	
W 25 EN	B8EG	
W 25 EPT	BR8EIX	
W 25 FC	B8HCS	
W 25 FN	BR8HIX	
W 27 EMRC	BR9ECM	
W 27 EMRZ-U	BR9ECMIX	
W 27 EN	B9EG	
W 27 EPT	BR9EIX	
W 27 ES	B9ES	Q202
W 27 ESG-U	BR9EIX	
W 27 ESR	BR9ES	Q208
W 27 ESR-U	BR9ES	Q208
W 27 ESRV	BR9EG	
W 27 ESRZ-U	BR9EIX	
W 27 ES-U	B9ES	Q202
W 27 ESV	B9EG	
W 27 ESZ-U	BR9EIX	

DENSO	→ NGK	Quick
W 27 FC	B9HCS	
W 27 FN	BR9HIX	
W 27 FS	B9HS	
W 27 FSG-U	BR9HIX	
W 27 FSR	BR9HS	
W 27 FS-U	B9HS	
W 27 FS-U 10	B9HS-10	
W 27 FSZ-U	BR9HIX	
W 29 ESG-U	B95EGV	
W 29 ESRV	BR10EG	
W 29 ESV	B10EG	
W 29 ESZ-U	B95EGV	
W 31 EMRZ-U	BR10ECMIX	
W 31 EN	B10EG	
W 31 EPT	R7376-10	
W 31 ES	B10ES	
W 31 ESG-U	BR10EIX	
W 31 ESR-U	BR10ES	
W 31 ESRZ-U	BR10EIX	
W 31 ES-U	B10ES	
W 31 ESZ-U	BR10EIX	
W 31 FS	B10HS	
W 31 FSG-U	BR10HIX	
W 31 FSZ-U	BR10HIX	
W 34 ESZ-U	BR10EIX	
X 20 EPR-U 9	DPR6EA-9	
X 20 ES-U	D6EA	
X 20 FS-U	D6HA	
X 22 EPR-U 9	DPR7EA-9	Q220
X 22 EPRZ-U 9	DPR7EIX-9	
X 22 EP-U	DP7EA-9	
X 22 EP-U 9	DP7EA-9	
X 22 EPZ-U 9	DPR7EIX-9	
X 22 ESG-U	DR7EIX	
X 22 ESR-U	DR7ES	
X 22 ES-U	D7EA	
X 22 ESZ-U	DR7EIX	
X 24 EPR-U 9	DPR7EA-9	Q220
X 24 EPRZ-U 9	DPR8EIX-9	
X 24 EP-U	DP8EA-9	
X 24 EP-U 9	DP8EA-9	
X 24 EPZ-U 9	DPR8EIX-9	
X 24 ESG-U	DR8EIX	
X 24 ESR-U	DR8ES-L	Q218
X 24 ESRZ-U	DR8EIX	
X 24 ESRZ-U 9	DR8EIX	
X 24 ES-U	D8EA	Q216
X 24 ESZ-U	DR8EIX	
X 24 ESZ-U 9	DR8EIX	
X 24 FSR-U	DR8HS	
X 24 FS-U	D8HA	
X 24 GPR-U	DPR8Z	





DENSO	→ NGK	Quick
X 27 EPR-U 9	DPR7EA-9	Q220
X 27 EPRZ-U 9	DPR9EIX-9	
X 27 EP-U 9	DP9EA-9	
X 27 EPZ-U 9	DPR9EIX-9	
X 27 ESR-U	DR8ES	Q217
X 27 ESRZ-U	DR9EIX	
X 27 ESRZ-U 9	DR9EIX	
X 27 ES-U	D9EA	
X 27 ESZ-U	DR9EIX	
X 27 ESZ-U 9	DR9EIX	
X 27 ETR	JR9B	Q224
X 27 GPR-U	DPR9Z	
X 29 ESZ-U	DR9EIX	
X 31 ES-U	D10EA	
XE 20 HR-U 9	LZKAR7A	
XU 20 EPR-U	DCPR6E	
XU 22 EPR	DCPR7E	
XU 22 EPRP	DCPR7EIX	
XU 22 EPR-U	DCPR7E	
XU 22 EPRZ-U	DCPR7EIX	
XU 22 PR 9	DCPR7EA-9	
XU 24 EPRP	DCPR8EIX	
XU 24 EPR-U	DCPR8E	
XU 24 EPRZ-U	DCPR8EIX	
XU 24 EP-U	DCPR8E	
XU 24 EPZ-U	DCPR8EIX	
XU 27 EPR-U	DCPR9E	
XU 27 EPRZ-U	DCPR9EIX	
Y 27 FER	ER9EH	
Y 27 FERC	ER9EH	
Z 20 ES-U	D6EA	
D 2	BPR6ES	
D 3	BPR6HS	Q214
D 4	BP6ES	
D 5	BP6EFS	
D 6	BPR5ES	
D 8	BP5ES	
D 13	BPR6ES-11	
D 15	ZGR5A	
D 18	BP6HS	
D 19	BPR7ES	
D 54	B5ES	
D 55	B6ES	
D 56	B7ES	
D 57	B5HS	
D 58	B6HS	Q203
D 71	BP5HS	
D 74	BP7HS	
D 100	BPR5ES-11	
D 103	BKR5EIX	
D 105	BKUR6ET	
D 112	BKR6EKC	

DENSO	→ NGK	Quick
D 116	BKR7E-11	
D 136	BR7ES	
D 140	BPR4ES	
D 148	BKR7E	
D 149	BKR5EIX-11	
D 167	LZKAR7A	
I 03	BKR5EIX-11	
I 04	BKR6EIX-11	
I 05	BPR5EIX-11	
I 06	BPR6EIX-11	
I 07	BPR7EIX	
I 08	DCPR7EIX	
I 16	BR8EIX	
I 17	BR9EIX	
I 19	BR10EIX	
I 26	TR6IX	
I 36	FR9BI-11	
I 61	CR7EIX	
I 62	CR8EIX	
I 63	B8HCS	
I 68	CR8EHIX-9	
I 69	CR9EHIX-9	
I 71	DR7EIX	
I 72	DR8EIX	
I 73	DR9EIX	
I 75	DPR7EIX-9	
I 76	DPR8EIX-9	
I 77	DPR9EIX-9	
I 78	BPR6HIX	
I 79	BR7HIX	
I 80	BR8HIX	
I 81	BR9HIX	
I 83	CR7HIX	
I 84	CR8HIX	
I 88	IMR9A-9H	
I 90	CR9EIA-9	
I 91	BR8ECMIX	
I 92	BR9ECMIX	
I 93	BR10ECMIX	
I 100	ER8EHIX	
I 101	ER9EHIX	
P 16	PTR5A-13	
P 52	PZFR6F	
R 31	R2525-9	
R 47	R7282-105	
V 14	IJR7A9	
V 26	IMR8C-9H	
V 27	IMR9C-9H	
V 31	IMR9B-9H	
V 33	IZFR6F11	
V 42	IMR9C-9HES	
3013	BPR4EY	





DENSO	→ NGK	Quick
3018	BP5ES	
3025	B5ES	
3034	B5HS	
3043	BP6ES	
3049	BPR6ES-11	
3051	B6ES	
3068	BP6HS	
3070	BPR6HS	Q214
3073	B6HS	Q203
3074	BR6HIX	
3075	B6S	Q302
3088	BPR7ES	
3093	B7ES	
3095	BR7EIX	
3098	BR7ES	
3161	BKR5EIX-11	
3163	BKR6EIX-11	
3165	BKR7E	
3179	DCPR7E	
3192	BKR7E-11	
3201	BPR5ES-11	
3231	BPR5EIX	
3242	DCPR7EIX	
3255	BCP7ES	
3256	ZGR5A	
3262	BKR6EIX-11	
3281	BPR7EIX	
3285	BPR5EIX-11	
3290	BKR7EIX	
3291	BPR6EIX	
3293	BKR5EIX	
3304	BKR6EKC	
3312	DCPR8E	
3313	DCPR9E	
3314	DCPR9EIX	
3323	BPR6EIX-11	
3344	BPR6ES	
3345	BPR5ES	
3348	ZFR7F-11	
3427	LZKAR7A	
4019	BP5HS	
4021	BP7HS	
4025	B7HS	Q204
4026	BR7HIX	
4027	B7S	
4028	BP8ES	
4030	B8ES	Q201
4032	BR8EIX	
4048	BR9EIX	
4057	B95EGV	
4093	DP8EA-9	
4097	DPR8EIX-9	

DENSO	→ NGK	Quick
4136	BPR8ES	Q213
4167	DR8EIX	
4172	DR9EIX	
4189	CR8EIX	
4201	CR7EK	
5031	BP6EFS	
5060	BKUR6ET	
5068	PTR5A-13	
5303	BKR5EIX-11	
5304	BKR6EIX-11	
5305	BPR5EIX-11	
5306	BPR6EIX-11	
5307	BPR7EIX	
5308	DCPR7EIX	
5316	BR8EIX	
5317	BR9EIX	
5326	TR6IX	
5361	CR7EIX	
5362	CR8EIX	
5372	DR8EIX	
5376	DPR8EIX-9	
5378	BPR6HIX	
5379	BR7HIX	
5615	IFR6L11	
5616	IFR8H11	
5630	IFR9H11	
6054	B6HS	Q203
DUCATI	→ NGK	Quick
670-403-51A	DCPR8E	
670-403-51B	DCPR8E	
670-403-81	MAR10A-J	
670-403-81A	MAR10A-J	
670-404-51A	MAR9A-J	
ENKER	→ NGK	Quick
F 45 CP	BP4HS	
F 50 C	B5HS	
F 55 CP	BP5HS	
F 65 CP	BP6HS	
F 75 C	B6HS	Q203
F 80 C	B7HS	Q204
F 85 CP	BP7HS	
F 100 C	B8HS	Q205
FA 70	B-6L	
FE 30 C	B4ES	
FE 45 CP	BP5ES	
FE 50 C	B5ES	
FE 55 CP	BP5ES	
FE 65 CP	BP6ES	





ENKER	→ NGK	Quick
FE 70 C	B6ES	
FE 75 C	B7ES	
FE 80 C	B8ES	Q201
FE 95 CP	BP8ES	
FE 100 C	B9ES	Q202
FET 75 CP	BP6EFS	
FS 30	B-4	
FS 70	B6S	Q302
FS 75 C	B7S	
FS 80	B8S	
FSC 50 C	BM6A	Q303
FSC 50 P	BPM6A	Q304
FSC 70 P	BPM6A	Q304
FSC 75 CP	BPM7A	Q305
M 60	AB-6	
M 75	AB-7	
M 80	AB-8	
SFE 55 CP	BKR5ES	
SFE 65 CP	BKR6ES	
SFE 65 CPR	BPR5ES	
T 70	C6HSA	
T 90	C7HSA	
EVINRUDE	→ NGK	Quick
204 470 091	BR7ES	
278 000 608	BR7ES	
278 000 609	BR8ES	Q207
MCBR 8 EG	BR8EG	
MCBR 8 HS	BR8HS	Q212
MCBR 9 EG	BR9EG	
MCBR 9 ES	BR9ES	Q208
MCBR 10 EG	BR10EG	
EYQUEM	→ NGK	Quick
50 AM	B-6L	
50 M	B5HS	
70 M	B6HS	Q203
75 LM	B6ES	
75 M	B6HS	Q203
100 M	B8HS	Q205
200	B-4H	
406	BP6HS	
450 L	B5ES	
500 AM	B-6L	
500 C	B6S	Q302
500 CM	B6S	Q302
500 CT	BM6A	Q303
500 M	B5HS	
550 LS	BP5ES	
550 S	BP4HS	
580 LS	BP5ES	
580 S	BP4HS	

EYQUEM	→ NGK	Quick
600 L	B6ES	
600 LS	BP6ES	
600 S	BP5HS	
700	B6HS	Q203
700 CM	B6S	Q302
700 CTS	BPM6A	Q304
705 L	B6ES	
705 S	BP6HS	
707 LS	BP6ES	
750	BP6HS	
750 L	B6ES	
750 LJS	BP6EFS	
750 LS	BP6ES	
753 LJS	BP6EFS	
755	B6HS	Q203
755 CM	B6S	Q302
755 L	B6ES	
755 LJS	BP6EFS	
755 LS	BP6ES	
755 M	B6HS	Q203
755 S	BP6HS	
775 SX	BP6HS	
775 X	B6HS	Q203
800 L	B6ES	
800 LJS	BP6EFS	
800 LS	BP6ES	
802 L	B6ES	
803 LJS	BP6EFS	
805 L	B6ES	
805 LP	BR8EIX	
850	B7HS	Q204
1000	B8HS	Q205
1000 CM	B7S	
1000 L	B8ES	Q201
1000 M	B8HS	Q205
1100	B9HS	
1100 L	B8ES	Q201
1150 L	B9ES	Q202
C 32	B5HS	
C 32 LS	BP5ES	
C 32 S	BP5HS	
C 42 LJS 3	BP6EFS	
C 42 S	BP6HS	
C 52 LS	BP5ES	
C 62	B7HS	Q204
C 62 LJS	BP6EFS	
C 62 LS	BP6ES	
C 62 S	BP7HS	
C 92 LS	BP8ES	
D 775	D6HA	
D 800 L	D7EA	
D 900 L	D8EA	Q216





EYQUEM	→ NGK	Quick
D 1000	D8HA	
D 1000 L	D9EA	
D 1050 L	D9EA	
FC 72 LS	BCP7ES	
FC 82 LS	BCPR7E	
FC 82 LS 1	BCP7ES	
FC 82 LS 2	BCP7ES	
K 200 M	AB-6	
K 300 M	AB-6	
K 500 M	AB-6	
K 600 M	AB-6	
K 750 M	AB-7	
R 850	BR7HS	Q211
R 1000	BR8HS	Q212
R 1000 L	BR8ES	Q207
RC 42 S	BPR6HS	Q214
RC 52 LZE	ZGR5A	
RC 62 HJSDP	PTR5A-13	
RC 62 LS	BPR6ES	
RC 62 LS 5	BPR6ES-11	
RC 62 S	BPR7HS	Q215
RC 82 LS	BPR7ES	
RFC 42 LS	BKR5ES	
RFC 52 LS	BKR5ES	
RFC 52 LS 5	BKR5ES-11	
RFC 58 LS	BKR6ES	
RFC 58 LS 5	BKR6ES-11	
RFC 58 LZ 2	BKR6EKC	
RFC 58 LZ 3 EX	BKUR6ET	
RFC 62 LS 3	BKR6ES-11	
RFC 62 LS 5	BKR6ES-11	
T 850	C7HSA	
HARLEY-DAVIDSON	→ NGK	Quick
3	B-6L	
4	B-6L	
4 R	B-6L	
4 R 5	BPR7HS-10	
5	B6S	Q302
5 RL	ZGR5C	
6 R 12	DCPR8E	
8	BR10EIX	
10 R 12 A	DCPR8E	
45	BP7HS	
HONDA	→ NGK	Quick
30717002 / 0	DR9EA	Q219
12290-RSH-0030	IFR6G-11K	
31901-NN2-0030	BR6ES	
31901-NX4-7020-M1	R7376-10	
31901-NX4-9010	R7376-10	
31908-KRN-A41	R0451B-8	

HONDA	→ NGK	Quick
31908-KRN-A410-M1	R0451B-8	
31908-KTW-901	LMAR8A-9	
31908-KTW-9010-M1	LMAR8A-9	
31908-KTW-9011-M1	LMAR8A-9	
31908-MGC-003	LMAR8A-9S	
31908-MGC-0031	LMAR8A-9S	
31908-MGC-A0000	LMAR8A-9S	
31909-MEN-A31	SILMAR9A9S	
31909-MEN-A310-M1	SILMAR9A9S	
31909-MGC-0031	LMAR8A-9S	
31910-MEN-A31	SILMAR10A9S	
31911-HW1-671	IMR9D-9H	
31911-HW1-6710-M1	IMR9D-9H	
31911-KRN-731	R0409B-8	
31911-KRN-7310-M1	R0409B-8	
31911-KSK-731	BR9EG-N-8	
31911-KSK-7310-M1	BR9EG-N-8	
31911-MBT-F21	IJR8B9	
31911-MBT-F210-M1	IJR8B9	
31911-MBW-E11	IMR8C-9H	
31911-MBW-E111-M1	IMR8C-9H	
31911-MBW-E112-M1	IMR8C-9H	
31911-MEE-J01	IMR8C-9HES	
31911-MEE-J010-M1	IMR8C-9HES	
31911-MEE-J011-M1	IMR8C-9HES	
31912-MBW-E11	IMR9C-9H	
31912-MBW-E110	IMR9C-9H	
31912-MBW-E111-M1	IMR9C-9H	
31912-MBW-E112-M1	IMR9C-9H	
31912-MCW-0030	IMR9B-9H	
31912-MEE-0000	IMR9C-9H	
31912-MEE-J01	IMR8C-9HES	
31912-MEL-0030	IMR9C-9HES	
31912-MEL-A	IMR9C-9HES	
31912-MFL-0030	IMR9E-9HES	
31912-MGH-641	IMR8E-9HES	
31916-KPH-901	CPR6EA-9	
31916-KPH-9010-M1	CPR6EA-9	
31916-KRM-841	CPR8EA-9	
31916-KRM-8410-M1	CPR8EA-9	
31916-KRM-8413-M1	CPR8EA-9	
31916-MEH-0030	SIMR8A9	
31916-ZY3-0030	IZFR6F11	
31916-ZY3-0032	IZFR6F11	
31916-ZY3-004	IZFR6F11	
31917-KPH-901	CPR7EA-9	
31918-MEB-671	IFR8H11	
31918-MEB-6710-M1	IFR8H11	
31918-MEB-672	IFR9H11	
31919-MEB-671	IFR9H11	
31919-MEB-6710-M1	IFR9H11	
31919-MEB-672	IFR8H11	





HONDA	→ NGK	Quick
3191W-Z0M-5400	BPR4ES	
3191W-Z0M-5500	BPR5ES	
3191W-Z0M-5600	BPR6ES	
31921-MBW-E12	IMR8C-9H	
31922-MBW-E12	IMR9C-9H	
31922-MEL-003	IMR9C-9HES	
31922-MFL-003	IMR9E-9HES	
31922-MOW-004	IMR9B-9H	
31926-KRM-841	CPR9EA-9	
31940-NX5-7520-M1	R7282-105	
31940-NX5-9410	R7282-105	
31988-GEV-761	ER8EH-N	
31988-GEV-7611-M1	ER8EH-N	
89819-99010	BPR5ES	
89839-99010	BPR6ES	
94701-00408	CR9EIA-9	
98049-59716	ER9EH	
98049-59726	ER9EH	
98056-56713	C6HSA	
98056-56713-00	C6HSA	
98056-56713-01	C6HSA	
98056-56716	CR6HS	Q223
98056-56717-00	CR6HSA	
98056-56718	CR6HSA	
98056-5671R-00	CR6HSA	
98056-56723	C6HSA	
98056-56726	CR6HSA	
98056-57713	C7HSA	
98056-57713-00	C7HSA	
98056-57713-0A	C7HSA	
98056-57716	CR7HS	
98056-57718	CR7HSA	
98056-5771R-00	CR7HSA	
98056-57726	CR7HSA	
98056-57918	CR7HSA-9	
98056-58713	C8HSA	
98056-58716	CR8HS	
98056-58718	CR8HSA	
98059-56916	CR6EH-9	
98059-57817-00	CR7E	Q225
98059-57910	CR7EH-9	
98059-57916	CR7EH-9	
98059-57916-00	CR7E	Q225
98059-57926	CR7EH-9	
98059-58816	CR8E	Q226
98059-58816-H0	CR8E	Q226
98059-58817-00	CR8E	Q226
98059-58910	C8EH-9	
98059-58916	CR8EH-9	Q228
98059-58916-00	CR8E	Q226
98059-5891F	CR8EHIX-9	
98059-58920	C8EH-9	

HONDA	→ NGK	Quick
98059-58926	CR8EH-9	Q228
98059-5892D	IMR8C-9H	
98059-589J6	CR8EH-9S	
98059-589K6	CR8EH-9S	
98059-59816	CR9E	Q227
98059-59816-H0	CR9E	Q227
98059-59916	CR9EH-9	Q229
98059-5991F	CR9EHIX-9	
98059-5991U	IMR9A-9H	
98059-5992U	IMR9C-9H	
98059-599U	CR9EHI-9	
98061-58616	DPR8Z	
98061-59616	DPR9Z	
98066-56710	D6HA	
98066-56717	D6HA	
98066-58710	D8HA	
98066-58714	D8HA	
98066-58716	DR8HS	
98066-58717	D8HA	
98069-38716	DR8ES-L	Q218
98069-38719	DR8ES-L	Q218
98069-56717	D6EA	
98069-56916	DPR6EA-9	
98069-5697Q	DCPR6E	
98069-5697Q-HE	DCPR6EIX	
98069-57716	DR7ES	
98069-57717	D7EA	
98069-57717-00	D7EA	
98069-57717-02	D7EA	
98069-57719	DR7ES	
98069-5771P	DR7EA	
98069-5771P-00	DR7EA	
98069-5771R	DR8EA	
98069-57726	DR7EA	
98069-57911	DP7EA-9	
98069-57912	DPR7EIX-9	
98069-57916	DPR7EA-9	Q220
98069-57916-00	DPR7EA-9	Q220
98069-5791U	IJR7A9	
98069-57922	DPR7EIX-9	
98069-5792U	IJR7A9	
98069-5797Q	DCPR7E	
98069-58716	DR8ES	Q217
98069-58717	D8EA	Q216
98069-58717-01	D8EA	Q216
98069-58719	DR8ES	Q217
98069-5871P	DR8EA	
98069-5871P-00	DR8EA	
98069-58726	DR8EA	
98069-58911	DP8EA-9	
98069-58912	DPR8EIX-9	
98069-58916	DPR8EA-9	Q221





HONDA	→ NGK	Quick
98069-58916-03	DPR8EA-9	Q221
98069-5891F	DPR8EIX-9	
98069-58922	DPR8EIX-9	
98069-58926	DPR7EA-9	Q220
98069-59717	D9EA	
98069-59911	DP9EA-9	
98069-59912	DPR9EIX-9	
98069-59916	DPR9EA-9	Q222
98069-5991F	DPR9EIX-9	
98069-59926	DPR7EA-9	Q220
98069-60717	D10EA	
98073-54710	B-4	
98073-54744	BMR4A	Q306
98073-54754	BMR4A	Q306
98073-56740	BM6A	Q303
98073-56741	BPM6A	Q304
98073-56744	BMR6A	Q307
98073-56750	BM6A	Q303
98076-54710	B-4H	
98076-54711	BP4HS	
98076-54717	BPR4HS	
98076-54719	BP4HS	
98076-54747	BPR4HS	
98076-54770	B-4H	
98076-54780	B-4H	
98076-55711	BP5HS	
98076-55716	BR5HS	
98076-55717	BPR5HS	
98076-55719	BP5HS	
98076-55747	BPR5HS	
98076-56710	B6HS	Q203
98076-56711	B6HS	Q203
98076-56711-00	BP6HSA	
98076-56713	BP6HSA	
98076-56715	BPR6HSA	
98076-56716	BR6HS	Q209
98076-56717	BPR6HS	Q214
98076-56719	BP6HS	
98076-56719-02	BP6HS	
98076-5671G	BR6HSA	Q210
98076-5671G-00	BR6HSA	Q210
98076-56721	BP6HS	
98076-56725	BPR6HSA	
98076-56729	BPR6HS	Q214
98076-5672G	BR6HSA	Q210
98076-56740	B6HS	Q203
98076-56741	B6HS	Q203
98076-56747	BPR6HS	Q214
98076-56756	BPR6HS	Q214
98076-56917	BPR6HS-10	
98076-56927	BPR6HS-10	
98076-57710	B7HS	Q204

HONDA	→ NGK	Quick
98076-57711	BP7HS	
98076-57716	BR7HS	Q211
98076-57717	BPR7HS	Q215
98076-57719	BP7HS	
98076-57719-01	BP7HS	
98076-57740	B7HS	Q204
98076-58710	B8HS	Q205
98076-58711	BP8HS	
98076-58713	BPR8HSA	
98076-58715	BPR8HSA	
98076-58716	BR8HS	Q212
98076-58717	BPR8HS	
98076-58719	BP8HS	
98076-5871G	BR8HSA	
98076-5871G-00	BR8HSA	
98076-5871G-01	BR8HSA	
98076-5872G	BR8HSA	
98076-58740	B8HS	Q205
98076-58747	BPR8HS	
98076-59710	B9HS	
98076-59716	BR9HS	
98076-59740	B9HS	
98079-52876	BPR2ES	
98079-54817	BPR4ES	
98079-54846	BPR4ES	
98079-55144	BP5ES-11	
98079-55145	BPR5ES-11	
98079-5515U	IFR5L11	
98079-5517U	IFR5L11	
98079-55810	B5ES	
98079-55811	BP5ES	
98079-55817	BPR5ES	
98079-55840	B5ES	
98079-55841	BP5ES	
98079-55841-03	BP5ES	
98079-55844	BPR5EIX	
98079-55846	BPR5ES	
98079-5585V	ZGR5A	
98079-55876	BPR5ES	
98079-55876-H0	BPR5ES	
98079-5587V	ZGR5A	
98079-56115	BPR6ES-11	
98079-56145	BPR6ES-11	
98079-56155	BPR6ES-11	
98079-5615U	IFR6L11	
98079-5617U	IFR6L11	
98079-5617V	IFR6G-11K	
98079-56810	B6ES	
98079-56811	BP6ES	
98079-56817	BR6ES	
98079-56840	B6ES	
98079-56841	BP6ES	





HONDA	→ NGK	Quick
98079-56844	BPR6EIX	
98079-56846	BPR6ES	
98079-56847	BR6ES	
98079-56849	BR6ES	
98079-56854	BP6ES	
98079-56855	BPR6ES	
98079-56871-H0	BP6ES	
98079-56876-H0	BPR6ES	
98079-5714E	BKR7E-11	
98079-5714F	BKR7EIX-11	
98079-5714G	ZFR7F-11	
98079-5715E	BKR7E-11	
98079-5715F	BKR7EIX-11	
98079-5715G	ZFR7F-11	
98079-57176	BR6ES	
98079-57614	BR7EIX	
98079-57810	B7ES	
98079-57816	BR7ES	
98079-57840	B7ES	
98079-57846	BPR7ES	
98079-57847	BR7ES	
98079-57848	BR7ES	
98079-57849	BR7ES	
98079-57855	BPR7ES	
98079-5785C	BKR7E	
98079-57874	BR7EIX	
98079-57876	BR7ES	
98079-57877	BR7ES	
98079-57946	BPR7EIX	
98079-58644	BR8EIX	
98079-58646	BR8EIX	
98079-58648	B8EG	
98079-58649	BR8EG	
98079-58678	B8EG	
98079-58679	BR8EG	
98079-58810	B8ES	Q201
98079-58810-01	B8ES	Q201
98079-58816	BR8ES	Q207
98079-58819	BR8ECS	
98079-58840	B8ES	Q201
98079-58841	BP8ES	
98079-58845	BR8ECM	
98079-58846	BR8ES	Q207
98079-58847	BPR8ES	Q213
98079-58857	BR8ES	Q207
98079-58870	B8ES	Q201
98079-58875	BR8ECM	
98079-58876	BR8ES	Q207
98079-5915U	FR9BI-11	
98079-5917U	FR9BI-11	
98079-59644	BR9EIX	
98079-59646	BR9EIX	

HONDA	→ NGK	Quick
98079-59648	B9EG	
98079-59649	BR9EG	
98079-59659	BR9EG	
98079-59678	B9EG	
98079-59679	BR9EG	
98079-59810	B9ES	Q202
98079-59811	B9ES	Q202
98079-59816	BR9ES	Q208
98079-59819	BR9ECS	
98079-59840	B9ES	Q202
98079-59845	BR9ECM	
98079-59847	BR9ES	Q208
98079-59855	BR9ECM	
98079-59870	B9ES	Q202
98079-59875	BR9ECM	
98079-59876	BR9ES	Q208
98079-60616	BR10EIX	
98079-60646	BR10EIX	
98079-60648	B10EG	
98079-60649	BR10EG	
98079-60676	BR10EIX	
98079-60678	B10EG	
98079-60679	BR10EG	
98079-60817	BR10ES	
98079-60819	BR10ECS	
98179-56841	BP6ES	
9859-5998H	IMR9A-9H	
9861-5515K	BKR5EIX-11	
9861-5615K	BKR6EIX-11	
9868-5615K	BKR6EIX-11	
9869-5798B	IJR7A9	
H9859-5998H	IMR9A-9H	
H9861-5515K	BKR5EIX-11	
H9861-5615K	BKR6EIX-11	
H9868-5615K	BKR6EIX-11	
H9869-5798B	IJR7A9	
HUSQVARNA	→ NGK	Quick
8528 522	LMAR8C-9	
ISOLATOR	→ NGK	Quick
6 B	BP6HS	
7 A	B6HS	Q203
7 B	BP6HS	
7 D	BP6ES	
A 7 D	BP6EFS	
FM 14145 / 2	BP5ES	
FM 14175 / 2	BP6ES	
FM 14200 / 2	BP6ES	
M 14145	B5HS	
M 14175	B6HS	Q203





ISOLATOR	→ NGK	Quick
M 14175 / 2	B6ES	
M 14225	B7HS	Q204
M 14240	B8HS	Q205
M 14260	B9HS	
M 1495	B-4H	
M 18225	AB-7	
M 18240	AB-7	
PM 14225	BP7HS	
ZM 14-260	B8HS	Q205

ITALJET	→ NGK	Quick
94 004	BR7HS	Q211
94 015	DR8EA	
94 025	BR8HS	Q212
94 029	BR9ES	Q208
94 032	CR7E	Q225

KAWASAKI	→ NGK	Quick
92070-001	B7HS	Q204
92070-007	B6HS	Q203
92070-014	B6ES	
92070-015	B7ES	
92070-019	B6ES	
92070-036	B9HS	
92070-037	B8ES	Q201
92070-053	B8ES	Q201
92070-054	B9ES	Q202
92070-0001	CR8EB	
92070-0007	IZFR6F11	
92070-0010	R6918B-9	
92070-0014	CR9EIA-9	
92070-0015	BR8ECMIX	
92070-0016	BR9ECMIX	
92070-0019	CR8E	Q226
92070-0020	CPR8EB-9	
92070-0022	CPR7EA-9	
92070-0029	CPR8EA-9	
92070-0036	ILZKAR7B11	
92070-0534	B8ES	Q201
92070-1002	B7ES	
92070-1011	D8EA	Q216
92070-1014	BP8ES	
92070-1014 B	BP8ES	
92070-1019	DR8ES	Q217
92070-1021	BR8ES	Q207
92070-1024	BP6ES	
92070-1025	BPR6ES	
92070-1027	BPR7ES	
92070-1034	D9EA	
92070-1044	BPR8ES	Q213

KAWASAKI	→ NGK	Quick
92070-1063	BR9EG	
92070-1064	BR8EG	
92070-1065	DPR8EA-9	Q221
92070-1066	DP8EA-9	
92070-1067	DP9EA-9	
92070-1068	DPR9EA-9	Q222
92070-1107	C7HSA	
92070-1109	BR9ES	Q208
92070-1113	DR7ES	
92070-1114	C6HSA	
92070-1114 C	C6HSA	
92070-1116	DR8ES-L	Q218
92070-1124	DP7EA-9	
92070-1125	DPR7EA-9	Q220
92070-1133	BR10EG	
92070-1138	DPR6EA-9	
92070-1140 C	BP8ES	
92070-1141 C	BP7HS	
92070-1142	C9E	
92070-1143	CR9E	Q227
92070-1145	CR9EK	Q230
92070-1153	CR6HSA	
92070-1154	CR7HSA	
92070-1155	CR8HSA	
92070-1157	BR9ES	Q208
92070-1158	CR8EK	
92070-1165	DR7EA	
92070-1167	BP5ES	
92070-1168	C8E	
92070-1168 B	C8E	
92070-1169	CR8E	Q226
92070-1169 B	CR8E	Q226
92070-1173	BR10ES	
92070-1189	DR9EA	Q219
92070-1199	DR8EA	
92070-1202 B	BP7HS	
92070-1209	CR7E	Q225
92070-1210	B9ES	Q202
92070-1218	C8HSA	
92070-1221	B10EG	
92070-1222	B8EG	
92070-1223	B9EG	
92070-1224	B9EG	
92070-1227	BR9EIX	
92070-1228	BR9EIX	
92070-1230	BR8EIX	
92070-1231	BR8EIX	
92070-1241	R6252K-105	
92070-1254	CR9EKPA	
92070-1263	BP8HS	
92070-1264	CR9EK	Q230
92070-1266	CR9E	Q227





KAWASAKI	→ NGK	Quick
92070-1270	BR8EIX	
92070-1271	BR9EIX	
92070-2051	BM6A	Q303
92070-2052	BP4HS	
92070-2060	BMR6A	Q307
92070-2061	BPR4HS	
92070-2062	BR6S	
92070-2072	BMR4A	Q306
92070-2077	BPR5ES	
92070-2078	BR8ES	Q207
92070-2090	B-4H	
92070-2098	BR4-LM	
92070-2100	BMR2A	
92070-2102	BPM7A	Q305
92070-2103	BMR2A-10	
92070-2109	BPM6A	Q304
92070-2110	BPR2ES	
92070-2112	BPR4ES	
92070-2116	B6HS	Q203
92070-2117	BR6HS	Q209
92070-3701	BR7ES	
92070-3702	BR8ES	Q207
92070-3707	PMR9B	
92070-7004 D	BPR4ES	
9270-2077 C	BPR5ES	
J 4520 IU 0131	R0373A-10	
J 4520 IU 22	CR7EIX	
J 4520 IU 24	CR8EIX	
J 4520 IU 27	B8HCS	
J 4520 IUF 22	CR7HIX	
J 4520 IUF 24	CR8HIX	
J 4520 IUH 24	CR8EHIX-9	
J 4520 IUH 27	CR9EHIX-9	
J 4520 IW 0127	R7376-9	
J 4520 IW 0131	R7376-10	
J 4520 IW 16	BPR5EIX-11	
J 4520 IW 20	BPR6EIX-11	
J 4520 IW 22	BPR7EIX	
J 4520 IW 24	BR8EIX	
J 4520 IW 27	BR9EIX	
J 4520 IW 31	BR10EIX	
J 4520 IWF 22	BR7HIX	
J 4520 IWF 24	BR8HIX	
J 4520 IWF 27	BR9HIX	
J 4520 IX 22 B	DPR7EIX-9	
J 4520 IX 24	DR8EIX	
J 4520 IX 24 B	DPR8EIX-9	
J 4520 IX 27	DR9EIX	
J 4520 IX 27 B	DPR9EIX-9	
J 4520 IXU 0127	R2525-9	
J 4520 IXU 22	DCPR7EIX	
J 4520 TR 24	BR8HS	Q212

KAWASAKI	→ NGK	Quick
J 4520 U20 FSRU	CR6HSA	
J 4520 U22 ESRN	CR7E	Q225
J 4520 U22 FSL	C7HSA	
J 4520 U22 FSRU	CR7HSA	
J 4520 U24 ESRN	CR8E	Q226
J 4520 U27 ESRN	CR9E	Q227
J 4520 U27 ETR	CR9EK	Q230
J 4520 W20 EPRU	BPR6ES	
J 4520 W20 EPU	BP6ES	
J 4520 W20 FPRU	BPR6HS	Q214
J 4520 W22 FPRU	BPR7HS	Q215
J 4520 W24 ESRU	BR8ES	Q207
J 4520 W27 ESRU	BR9ES	Q208
J 4520 W27 ESU	B9ES	Q202
J 4520 W31 ESRU	BR10ES	
J 4520 X20 EPRU 9	DPR6EA-9	
J 4520 X20 FSU	D6HA	
J 4520 X22 EPRU 9	DPR7EA-9	Q220
J 4520 X24 EPRU 9	DPR7EA-9	Q220
J 4520 X24 EPU 9	DP8EA-9	
J 4520 X24 ESRU	DR8EA	
J 4520 X24 ESU	D8EA	Q216
J 4520 X27 EPRU 9	DPR7EA-9	Q220
KIORITZ	→ NGK	Quick
159010-00130	B6S	Q302
159010-00131	B7S	
159010-01110	BR6S	
159010-01820	B-4	
159010-03520	B5HS	
159010-04120	B6HS	Q203
159010-10050	B-4H	
159026-12330	BPM6A	Q304
A 425213-0010	BM6A	Q303
A 425306-0310	BMR6A	Q307
A 425306-0311	BMR6A	Q307
A 425307-0010	BPM6A	Q304
A 425308-0010	BM6A	Q303
A 425309-0010	BPM7A	Q305
A 425312-0010	BPM7A	Q305
KOHLER	→ NGK	Quick
12 132 02-S	BKR5ES	
20 132 02-S	BKR5ES	
25 132 12-S	BKR5EIX	
25 132 14-S	BKR5ES	
66 132 01-S	BKR5ES	





KTM	→ NGK	Quick
452 39 093 000	LR8B	
470 39 093 000	BR10ECMIX	
503 39 093 100	BR9EIX	
515 39 093 000	BR9ECMIX	
543 31 093 210	BR10EG	
543 31 093 310	BR8EG	
543 31 093 410	BR8ECM	
590 39 093 000	CR8EK	
590 39 093 100	DCPR8E	
601 39 093 000	LKAR8BI9	
610 39 093 000	DCPR8E	
611 39 093 000	KR8DI	
612 39 093 200	LKAR9BI9	
750 39 093 000	LKAR8AI-9	
770 39 093 000	CR9EKB	
772 39 093 000	LMAR9AI-8	
778 39 093 000	LMAR9AI-10	
780 39 093 000	LKAR8A-9	
KUBOTA	→ NGK	Quick
07909-22250	BM6A	Q303
07909-23150	BM6A	Q303
10202-67716	AB-6	
12392-67711	BP5ES	
12647-67710	BPR6HS	Q214
12647-67711	BPR6HS	Q214
12863-67711	BP5ES	
12866-67711	BP5ES	
12992-67711	BPR5ES	
13078-67716	BP6ES	
13211-67711	B-4	
13211-67716	B-4	
13281-67711	B-4H	
13281-67716	B-4H	
13373-67741	BMR4A	Q306
13374-67741	BPR4HS	
13375-67740	BP5ES	
13401-67716	B6S	Q302
13403-67711	B6S	Q302
13412-67710	B7S	
13412-67716	B7S	
13451-67710	B6HS	Q203
13451-67716	B6HS	Q203
13581-67710	B7HS	Q204
13581-67716	B7HS	Q204
13582-67711	B6HS	Q203
13641-67711	B-4H	
13711-67711	B-4	
13901-67716	BP6HS	
13902-67711	BP6HS	
13979-67711	BP4HS	

LODGE	→ NGK	Quick
2 H	B7HS	Q204
2 H 12	D8HA	
2 HA	B6S	Q302
2 HAN	B8S	
2 HL	B7ES	
2 HL 10	C7HSA	
2 HLE	B7ES	
2 HLN	B7ES	
2 HN	B7HS	Q204
2 HNY	BP7HS	
2 HV	AB-8	
2 XL	BP6ES	
3 HAN	B8S	
3 HLN	B8ES	Q201
3 HN	B8HS	Q205
3 HNY	BP8ES	
4 HLN	BP8ES	
5 HLN	BP8ES	
15 HLN	BP6ES	
25 HL	BPR7ES	
25 XL	BP6ES	
BAN	B-4	
BBANY	BP-4	
BBL	AB-6	
BBNY	BP-4H	
BL 14	B4ES	
BLN	B4ES	
BLNY	BP5ES	
BN	B-4H	
BNY	BP-4H	
C 14	B5HS	
CAN	B6S	Q302
CANB	BPM6A	Q304
CANC	BM6A	Q303
CC 14	B6HS	Q203
CL 10	C6HSA	
CL 14	B5ES	
CLN	B6ES	
CLN 14 P	B5ES	
CLNH	B5ES	
CLNY	BP5ES	
CN	B5HS	
CNY	BP5HS	
CV	AB-6	
H	B6HS	Q203
H 12	D6HA	
H 14	B7HS	Q204
H 18	AB-7	
HA	B7S	
HAM	B7S	
HAN	B7S	
HB 12	D6HA	





LODGE	→ NGK	Quick
HBAN	B6S	Q302
HBL 12	D8EA	Q216
HBLN	B5ES	
HBN	B5HS	
HBSN	B-6L	
HBV	AB-6	
HF 2 HL	B8ES	Q201
HH 14	B9HS	
HL	B6ES	
HL 12	D9EA	
HL 14	B6ES	
HLE	B6ES	
HLN	B6ES	
HLNP	B6ES	
HLNY	BP6ES	
HN	B6HS	Q203
HN 14	B7HS	Q204
HNY	BP6HS	
HV	AB-7	
MAGNETI MARELLI	→ NGK	Quick
061 830 085 304	BPR7ES	
061 830 176 304	BP6HS	
061 830 210 304	BP6ES	
061 830 211 304	BPR6ES	
061 830 215 304	BP6EFS	
061 830 257 304	BPR6HS	Q214
061 830 258 304	BP5HS	
061 850 023 304	PTR5A-13	
062 000 611 304	B6HS	Q203
062 000 654 304	BP6HS	
062 000 739 304	BP6ES	
062 000 740 304	BPR6ES	
062 000 754 304	BP6HS	
8 LDCR	PTR5A-13	
AW 5 C	BM6A	Q303
CM 3 N	AB-6	
CM 4 N	AB-6	
CM 5 N	AB-6	
CM 6 N	AB-7	
CU 7 N	C7HSA	
CW 2 L	B4ES	
CW 2 N	B-4H	
CW 3 C	B-4	
CW 3 CJ	B-4	
CW 3 CP	BP-4	
CW 3 L	B4ES	
CW 3 N	B-4H	
CW 4 A	B5ES	
CW 4 C	B-4	
CW 4 CJ	B-4	

MAGNETI MARELLI	→ NGK	Quick
CW 4 CP	BP-4	
CW 4 L	B4ES	
CW 4 N	B-4H	
CW 4 NJ	B-4H	
CW 5 C	B-4	
CW 5 L	B5ES	
CW 5 LJ	B5ES	
CW 5 LP	BP5ES	
CW 5 LS	B5ES	
CW 5 LSZ	B5ES	
CW 5 N	B5HS	
CW 5 NJ	B5HS	
CW 5 NP	BP5HS	
CW 5 NR	BR5HS	
CW 5 NS	B5HS	
CW 5 NSZ	B5HS	
CW 6 C	B6S	Q302
CW 6 CE	BM6A	Q303
CW 6 CJ	B6S	Q302
CW 6 L	B5ES	
CW 6 LJ	B5ES	
CW 6 LP	BP5ES	
CW 6 LS	B5ES	
CW 6 LSZ	B5ES	
CW 6 N	B6HS	Q203
CW 6 NE	BM6A	Q303
CW 6 NJ	B6HS	Q203
CW 6 NP	BP6HS	
CW 6 NPR	BPR6HS	Q214
CW 6 NR	BR6HS	Q209
CW 7 C	B6S	Q302
CW 7 L	B6ES	
CW 7 LJ	B6ES	
CW 7 LP	BP6ES	
CW 7 LPH	BP6ES	
CW 7 LPR	BPR6ES	
CW 7 LR	BR6ES	
CW 7 N	B6HS	Q203
CW 7 NJ	B6HS	Q203
CW 7 NP	BP6HS	
CW 7 NPR	BPR6HS	Q214
CW 7 NR	BR6HS	Q209
CW 8 CJ	B7S	
CW 8 L	B7ES	
CW 8 LJ	B7ES	
CW 8 LPR	BPR7ES	
CW 8 N	B7HS	Q204
CW 8 NP	BP7HS	
CW 8 NR	BR7HS	Q211
CW 9 L	B8ES	Q201
CW 9 LJ	B8ES	Q201
CW 9 LP	BP8ES	





MAGNETI MARELLI	→ NGK	Quick
CW 9 N	B8HS	Q205
CW 10 L	B8EG	
CW 11 L	B9EG	
CW 12 L	B9EG	
CW 13 L	B10EG	
CW 14 L	B10EG	
CW 25 N	B-4H	
CW 55 N	B5HS	
CW 67 L	B6ES	
CW 67 LP	BP6ES	
CW 67 N	BP6HS	
CW 67 NJ	B6HS	Q203
CW 67 NR	BR6HS	Q209
CW 67 P	BP5ES	
CW 75 LP	BP6ES	
CW 78 L	B6ES	
CW 78 LP	BP6ES	
CW 78 LPR	BPR6ES	
CW 78 LPS	BP6ES	
CW 101 L	B85EGV	
CW 112 L	B9EG	
CW 225 A	B6HS	Q203
CW 250 A	B7HS	Q204
CW 260 N	B7HS	Q204
CWC 6 NJ	B6HS	Q203
CWC 7 NJ	B6HS	Q203
CWC 9 NJ	B7HS	Q204
CWC 12 NJ	B8HS	Q205
CWC 67 NJ	B6HS	Q203
CWF 11 L	BR8EIX	
CWP 5 N	BR6HIX	
CWP 6 N	BR6HIX	
CWP 7 N	BR6HIX	
CWP 8 L	BR7EIX	
CWP 8 N	BR7HIX	
CWP 9 L	BR8EIX	
CWP 9 N	BR8HIX	
CWP 10 L	BR9EIX	
CWP 10 N	BR9HIX	
CWP 11 L	BR10EIX	
CX 6 N	D6HA	
CX 8 L	D8EA	Q216
CX 8 N	D8HA	
DW 4 CJR	BR6S	
F 6 NC	BP5HS	
F 6 NCR	BPR5HS	
F 7 LC	BP6ES	
F 7 LCR	BPR6ES	
F 7 NC	BP6HS	
F 7 NCR	BPR6HS	Q214
F 8 LCR	BPR7ES	
FC 6 N	B5HS	

MAGNETI MARELLI	→ NGK	Quick
FC 7 N	B6HS	Q203
FC 9 L	BP8ES	
T 7 LC	BP6EFS	
TW 7 LP	BP6EFS	
TW 78 LP	BP6EFS	
MARCHAL / VALEO	→ NGK	Quick
11 720	B8HS	Q205
12 086	B8HS	Q205
17 C	AB-7	
19 C	AB-7	
19 E	AB-7	
19 L	AB-7	
2 / 32 H	B8ES	Q201
2 / 33 H	B7ES	
20 C	AB-6	
20 E	AB-6	
20 L	AB-6	
21 C	AB-6	
21 E	AB-6	
21 L	AB-6	
34 / 5 HS	BP6ES	
34 C	B7S	
34 CM	B7S	
34 HS	B7ES	
34 HSM	B7ES	
34 S	B7HS	Q204
35	B6HS	Q203
35 / 1	BP6HS	
35 / 1 B	BP6HS	
35 / 1 D	BP6HS	
35 / 36 D	B6HS	Q203
35 / 36 P	B6HS	Q203
35 / 36 R	B6HS	Q203
35 B	B6HS	Q203
35 C	B6S	Q302
35 CM	B6S	Q302
35 HA	BP6ES	
35 HS	B6ES	
35 M	B6HS	Q203
35 P	B6HS	Q203
36	B5HS	
36 B	B5HS	
36 C	B-4	
36 CM	B-4	
36 D	B5HS	
36 HS	B5ES	
36 M	B5HS	
36 P	B5HS	
37 S	B5HS	
41 306	AB-8	





MARCHAL / VALEO	→ NGK	Quick
4 N	B7HS	Q204
5 H	B7ES	
5 N	BP6HS	
5 NCYCLO	BP6HS	
67 HP	BR8EIX	
6 N	BP5HS	
70 H	BP6ES	
76 H	BP5ES	
7 H	BP6ES	
84 H	BP5ES	
88 N	B5HS	
8 H	BP6ES	
9 H	BP5ES	
C 64 H	BP6EFS	
C 68 H	BP6EFS	
C 7 H	BP6EFS	
F 70 H	BCP7ES	
F 80 H	BCP7ES	
GT 34	BP7HS	
GT 34 / 2 H	BP6ES	
GT 34 / 5	BP6HS	
GT 34 / 5 D	BP6HS	
GT 34 / 5 H	BP6ES	
GT 34 / 5 HA	BP6ES	
GT 34 / 5 HD	BP6ES	
GT 34 D	BP7HS	
GT 34 HD	BP6ES	
GT 35	BP5HS	
GT 35 D	BP5HS	
GT 35 H	BP5ES	
GT 35 HD	BP5ES	
H 32 RG	B9EG	
H 33 RG	B8EG	
H 34 F	B8ES	Q201
HA 32 / 2	B8ES	Q201
HA 32 RS	B9EG	
HF 34	B7ES	
HF 34 F	B8ES	Q201
RR 31 HS	B10EG	
RR 32 HS	BR9EIX	
RR 33 HSS	BR8EIX	
SCGT 34 / 5H	BP6EFS	
SCGT 35 H	BP6EFS	
V 36 A	B5HS	
V 6 NSOLEX	B5HS	
MBK	→ NGK	Quick
9079Q-04155 00	B6HS	Q203
9079Q-04156 00	B7HS	Q204
9079Q-04157 00	B8HS	Q205
9079Q-04158 00	B7ES	

MBK	→ NGK	Quick
9079Q-04159 00	B8ES	Q201
9079Q-04160 00	B9ES	Q202
9079Q-04161 00	BPR6HS	Q214
9079Q-04162 00	BPR7HS	Q215
9079Q-04163 00	BR7HS	Q211
9079Q-04164 00	BR9ES	Q208
9079Q-04913 00	B9HS	
9079Q-05072 00	BR8HS	Q212
9079Q-05790 00	BR8ES	Q207
9079Q-05791 00	BR9HS	
9079Q-05792 00	CR7E	Q225
9079Q-05793 00	CR8E	Q226
9079Q-30501 00	CPR9EA-9	
MOTORCRAFT	→ NGK	Quick
1 Y 00	BPR5ES	
1 Y 01	BPR6ES	
1 Y 03	BPR5ES-11	
1 Y 0 B	BKR7E-11	
1 Y 0 F	DCPR7E	
A 1	B8S	
A 1 CU	B8S	
A 1 X	B8S	
A 2	B7S	
A 21 X	B8S	
A 22 NX	BPM7A	Q305
A 2 X	B7S	
A 3	B6S	Q302
A 3 CU	B6S	Q302
A 3 NX	BM6A	Q303
A 3 X	B6S	Q302
A 4	B6S	Q302
A 5	B6S	Q302
A 5 CU	B6S	Q302
A 5 X	B6S	Q302
A 7	B-4	
A 7 N	BM6A	Q303
A 7 NU	BM6A	Q303
A 7 NX	BM6A	Q303
A 7 U	B-4	
A 7 X	B-4	
A 82	BP-4	
A 9	B-4	
A 901	B8S	
A 9 X	B-4	
AE 1 C	B7HS	Q204
AE 1 X	B7HS	Q204
AE 2	B7HS	Q204
AE 22	BP6HS	
AE 22 C	BP6HS	
AE 2 C	B7HS	Q204





MOTORCRAFT	→ NGK	Quick
AE 2 X	B7HS	Q204
AE 3	B6HS	Q203
AE 32	BP6HS	
AE 32 C	BP6HS	
AE 3 C	B6HS	Q203
AE 3 X	B6HS	Q203
AE 4	B5HS	
AE 42	BP5HS	
AE 4 X	B5HS	
AE 52	BP5HS	
AE 6	B5HS	
AE 62	BP5HS	
AE 7	B-4H	
AE 8	B-4H	
AE 901	B9HS	
AE 901 X	B9HS-10	
AE 92	BP-4H	
AER 32	BPR6HS	Q214
AER 4	BR5HS	
AER 4 X	BR5HS	
AG 1	B8ES	Q201
AG 1 C	B8ES	Q201
AG 1 X	B8ES	Q201
AG 2	B7ES	
AG 22	BP6ES	
AG 22 C	BP6ES	
AG 22 CU	BP6ES	
AG 252	BP6ES	
AG 252 C	BP6ES	
AG 2 C	B7ES	
AG 2 CU	B7ES	
AG 2 X	B7ES	
AG 3	B6ES	
AG 32 A	BP6ES	
AG 32 C	BP6ES	
AG 32 CU	BP6ES	
AG 3 C	B6ES	
AG 3 X	B6ES	
AG 4	B5ES	
AG 403	R7376-10	
AG 403 C	R7376-10	
AG 42	BP5ES	
AG 42 CU	BP5ES	
AG 44	ZGR5C	
AG 5	B5ES	
AG 501	B10ES	
AG 501 X	BR10EIX	
AG 52	BP5ES	
AG 54	ZGR5C	
AG 5 CU	B5ES	
AG 603	BR9EIX	
AG 603 C	BR9EIX	

MOTORCRAFT	→ NGK	Quick
AG 7	B5ES	
AG 701	B9ES	Q202
AG 701 C	B9ES	Q202
AG 701 CU	B9ES	Q202
AG 701 X	BR9EIX	
AG 9	B4ES	
AG 901	B9ES	Q202
AG 901 C	B9ES	Q202
AG 901 CU	B9ES	Q202
AG 901 X	BR8EIX	
AG 902	BP8ES	
AG 903	B8EG	
AG 9 U	B4ES	
AGF 22 C	BP6EFS	
AGF 32 CU	BP6EFS	
AGKO	BUE	
AGN 42	BP5ES	
AGP 12 C	BCP7ES	
AGP 701 C	R7436-10	
AGPR 12 P	BKR7EIX-11	
AGPR 22 C	BKR6ES	
AGPR 22 C 1	BKR6ES-11	
AGPR 22 CD	BKR6ES	
AGPR 22 CD 1	BKR6ES-11	
AGPR 22 P	BKR6EIX-11	
AGPR 32 C	BKR6ES	
AGPR 32 CD 1	BKR6ES-11	
AGPS 12 P 1	BKR7EIX-11	
AGPS 22 C	BKR6ES	
AGPS 22 C 1	BKR6ES-11	
AGPS 22 P	BKR6EIX-11	
AGPS 22 P 1	BKR6EIX-11	
AGPS 32 C	BKR6ES	
AGPS 32 C 1	BKR6ES-11	
AGR 12 C	BPR7ES	
AGR 1 X	BR8ES	Q207
AGR 21	BR6ES	
AGR 22	BPR6ES	
AGR 22 C	BPR6ES	
AGR 22 CU	BPR6ES	
AGR 2 C	BR7ES	
AGR 31	BR6ES	
AGR 32	BPR6ES	
AGR 32 C	BPR6ES	
AGR 32 CU	BPR6ES	
AGR 3 X	BR6ES	
AGR 42	BPR5ES	
AGR 42 C	BPR5ES	
AGR 42 CU	BPR5ES	
AGR 52	BPR5ES	
AGR 701 X	BR9EIX	
AGR 82	BPR4ES	





MOTORCRAFT	→ NGK	Quick
AGR 901 X	BR8EIX	
AGS 22 C	BPR6ES	
AGS 32 C	BPR5ES	
AGS 32 C 11	BPR5ES-11	
AGS 42 CC	BPR4ES	
AGSP 32	BKR6ES-11	
AGSP 32 C	BKR6ES-11	
AGSP 52	BKR5ES	
AL 5	B-6L	
AL 5 X	B-6L	
AL 7	B-6L	
AL 7 U	B-6L	
AL 7 X	B-6L	
AR 21 X	BR6S	
AR 31	BR6S	
AR 41	BR6S	
AR 51	BR6S	
AR 7 N	BMR6A	Q307
AR 82	BP-4	
AT 1	B8S	
AT 2	B7S	
AT 3	B6S	Q302
AT 4	B6S	Q302
AT 4 A	B6S	Q302
AT 6	B6S	Q302
AT 8	B-4	
ATL 3	B-6L	
ATL 4	B-6L	
AV 1 X	B8HS	Q205
AV 22 CU	BP6HS	
AV 2 CU	B7HS	Q204
AV 2 X	B7HS	Q204
AV 3 CU	B6HS	Q203
AV 4	B5HS	
AV 42	BP5HS	
AV 52	BP5HS	
AV 6	B-4H	
AV 6 CU	B-4H	
AV 701 CU 10	B9HS-10	
AV 82	BP-4H	
AV 901 CU	B9HS	
AV 901 X 4	B9HS-10	
AVZKO	BUHX	
AWSF 22 E	TR6IX	
AYFS 22 C	PTR5A-13	
AYFS 22 FPM 1	PTR5A-13	
AYFS 22 PP	PTR5A-13	
AYFS 22 PP 1	PTR5A-13	
AYRF 22 P	PTR5A-13	
AYRF 22 PP	PTR5A-13	
AZ 2	B7S	
AZ 3	B6S	Q302

MOTORCRAFT	→ NGK	Quick
AZ 9	B-4	
AZ 901	B8S	
AZFS 22 C	PTR5A-13	
AZFS 22 PP	PTR5A-13	
AZFS 32 FE	PTR5A-13	
B 2	AB-8	
B 2 W	AB-8	
B 3 W	AB-7	
B 3 X	AB-7	
B 4	AB-7	
B 4 X	AB-7	
B 6	AB-6	
B 6 W	AB-6	
B 8	AB-6	
B 8 X	AB-6	
B 9	AB-6	
BR 8	AB-6	
BT 10	AB-6	
BT 2	AB-8	
BT 3	AB-7	
BT 4	AB-7	
BT 6	AB-6	
BT 8	AB-6	
BT 9	AB-6	
BZ 8	AB-6	
HE 2	D8HA	
HE 3	D6HA	
HG 2	D8EA	Q216
HG 22	D8EA	Q216
HG 2 CU	D8EA	Q216
HGR 2 C	DR8ES-L	Q218
HV 2	D8HA	
HV 22	D6HA	
HV 3	D6HA	
PE 3	C6HSA	
PV 2	C7HSA	
PV 3	C6HSA	
MV AGUSTA	→ NGK	Quick
800 99561	CR9EKB	
8000 B7884	CR9EIB-9	
PIAGGIO	→ NGK	Quick
638 852	CR7EB	
638 853	CR8EB	
639 687	CR8EKB	
641 387	ER9EH-6N	
828 209	CR9EB	
829 981	CR7EKB	
847 085	B8ES	Q201
861 612	BR8ES	Q207





PIAGGIO	→ NGK	Quick
896 472	PMR9B	
AP 0297 542	DR8EA	
AP 0297 547	DR8EB	
AP 0297 830	BR10EG	
AP 0297 942	DCPR9E	
AP 2BEN 000088	BPR7HS	Q215
AP 2BEN 000276	CPR8E	
AP 2BEN 000319	ZMR7AP	
AP 8176 075	BPR4HS	
AP 8206 870	BR7HS	Q211
AP 8206 871	BR8HS	Q212
AP 8206 915	BR9ES	Q208
AP 8520 007	CR7E	Q225
AP 8600 008	BR9ECM	

POLARIS	→ NGK	Quick
3 022 332	GR9A-EG	

PSA	→ NGK	Quick
5962.05	BP6EFS	
5962.09	BP6EFS	
5962.13	BP6ES	
5962.14	BP6EFS	
5962.15	BP6EFS	
5962.16	BP6ES	
5962.22	BPR6EIX	
5962.2A	BPR6ES	
5962.2T	BKR6EKC	
5962.2X	BKR6ES	
5962.71	BKR6ES	
5962.72	BP6EFS	
5962.80	BP6HS	
5962.82	BP6ES	
5962.87	BP6EFS	
5962.88	BP8ES	
5962.90	BP6HS	
5962.A2	BP6ES	
5962.A3	BP6HS	
5962.C5	BKR6ES	
5962.C6	BKR6ES	
5962.H2	BKR6ES	
5962.H8	BKR5ES	
5962.H9	BKR5ES	
5962.J9	BKR6ES	
5962.K4	BKR6ES	
5962.K6	BKR6ES	
5962.R9	BKR6ES	
5962.S2	BKR6ES	
5962.S4	BKR5ES	
5962.S7	BP5ES	
5962.T8	BKR6ES	

PSA	→ NGK	Quick
5962.TO	BKR6ES	
5962.V6	BKR5ES	
5962.V7	BKR6ES	
5962.W1	BKR5ES	
7267.52	BR6HSA	Q210
7343.71	BR8HS	Q212
7355.92	BPR6HS	Q214
7369.54	BR7HS	Q211
7369.75	BR7ES	
7370.27	BPR5HS	
7381.55	BR8ES	Q207
7423.80	CR7E	Q225
7443.61	CPR8E	
7461.74	CR7EB	
7540.50	BR9ES	Q208
7567.56	DPR7EA-9	Q220
7567.57	B6HS	Q203
7567.58	BP5HS	
7567.59	B7HS	Q204
7567.60	B8HS	Q205
7567.61	BP6HS	
7567.62	B9ES	Q202
7567.63	B9HS	
7567.66	B8ES	Q201
7567.67	CPR8EB-9	
7567.68	BR9HS	
7567.70	B6ES	
7581.44	CR7HSA	
7598.74	CR7EKB	
7604.64	BPR7ES	
7616.05	CR9EB	
7664.20	CR7EKA	
7682.28	CR8EKB	
7696.18	CR8EB	
11 737 027 00	BPR5HS	
95 496 692	BP6HS	
95 605 398	B6HS	Q203
95 611 941	BP6EFS	
95 619 043	BP6ES	
96 064 890	BKR5ES	
AM 212 207 A	B6HS	Q203
ZC 986 209 0U	BP5ES	
ZCT 000 011	BP6HS	

SPLITFIRE	→ NGK	Quick
SF 406 B	BR9EIX	
SF 413 B	D9EA	
SF 419 D	C6HSA	
SF 426 C	BPR6ES	
TP 006 A	BPR8EIX	
TP 006 B	BPR7EIX	





SPLITFIRE	→ NGK	Quick
TP 006 C	BPR6EIX	
TP 006 D	BPR5EIX	
TP 006 E	BPR5EIX	
TP 406 B	BR9EIX	
TP 406 C	BR8EIX	
TP 416 B	DPR9EIX-9	
TP 416 C	DPR8EIX-9	
TP 430 B	CR9EIX	
TP 430 C	CR8EIX	

SUBARU	→ NGK	Quick
22401-AA000	BP5ES-11	
22401-AA020	BP6ES	
22401-AA030	BP6ES	
22401-AA120	BPR6ES-11	
22401-AA130	BPR6ES-11	
22401-AA200	BPR6ES	
22401-AA210	BPR7ES	
22401-AA220	BPR6ES	
22401-AA480	BPR5ES-11	
22401-AA500	BKR6EIX-11	
22401-AA510	BKR6EIX	
22401-KA090	BCPR6E	
22401-KA100	BCPR6E	
22401-KA130	BPR6ES	
22401-KA210	BKR6ES-11	
22401-KA240	DCPR7E	
22401-KA260	DCPR7E	
22401-KA310	DCPR8E	
22401-KA320	DCPR8EIX	
32054-0800	B6ES	
32054-1110	B7ES	
32054-1120	BR7EIX	
32054-5700	BR6ES	
38242-0800	B5ES	
42054-3200	BP5ES	
42054-5502	BP6ES	
49001-0003	BPR5EIX	
49001-0013	BPR6EIX	
49001-0023	BPR7EIX	
49001-0033	BPR5ES	
82054-1810	B6HS	Q203
82054-1812	B6HS	Q203
82054-6010	B8HS	Q205
82054-7820	BR6HIX	
82054-8020	BR8HIX	
82054-8600	B6ES	
82054-9310	B7HS	Q204
82054-9312	B7HS	Q204
82054-9320	BR7HIX	
88241-7800	B5HS	

SUBARU	→ NGK	Quick
89057-3400	B6S	Q302
SAB 330 DE 3360	BKR5EIX-11	
SAB 330 DE 3370	BKR6EIX-11	
SAB 330 DE 3430	DCPR7EIX	
SAB 330 DE 8680	BKR5EIX-11	
SAB 330 DE 8690	BKR6EIX-11	
SAB 330 DE 8720	DCPR7EIX	

SUZUKI	→ NGK	Quick
09482-00006	B-4	
09482-00011	B-4H	
09482-00036	BP-4H	
09482-00051	B6S	Q302
09482-00053	B7S	
09482-00054	B6ES	
09482-00056	B8ES	Q201
09482-00059	BP6HS	
09482-00060	BP7HS	
09482-00064	BR6HIX	
09482-00065	BR7HIX	
09482-00066	B9ES	Q202
09482-00074	BP6HS	
09482-00079	BR6ES	
09482-00082	B7HS	Q204
09482-00083	B7HS	Q204
09482-00084	BP6HS	
09482-00088	BR6HS	Q209
09482-00089	B7ES	
09482-00091	B8ES	Q201
09482-00095	B6HS	Q203
09482-00096	BR8EIX	
09482-00097	BR9EIX	
09482-00098	BR9ES	Q208
09482-00102	BR8HS	Q212
09482-00105	BP7HS	
09482-00114	BR8EIX	
09482-00115	BR9EIX	
09482-00116	BR7HS	Q211
09482-00117	BR7ES	
09482-00118	BP6ES	
09482-00120	BP5HS	
09482-00121	BR8ES	Q207
09482-00124	BP5HS	
09482-00127	BR9ES	Q208
09482-00128	B6ES	
09482-00131	BP5ES	
09482-00141	BPR6HS	Q214
09482-00142	B-4H	
09482-00143	BR5HS	
09482-00144	D8EA	Q216
09482-00145	D8EA	Q216





SUZUKI	→ NGK	Quick
09482-00147	BPR5HS	
09482-00149	DR8ES-L	Q218
09482-00151	B8HS	Q205
09482-00153	B7HS	Q204
09482-00155	BPR5ES	
09482-00157	BR8HS	Q212
09482-00159	BPR4EY	
09482-00161	BP4HS	
09482-00167-001	BPR5ES	
09482-00170	BP4HA	
09482-00171	BP4HS	
09482-00175	BP8ES	
09482-00177	BP6ES	
09482-00181	BR10EIX	
09482-00182	D7EA	
09482-00183	D7EA	
09482-00184	D9EA	
09482-00185	D9EA	
09482-00186	BP-4H	
09482-00188	BP6HS	
09482-00189	BP7HS	
09482-00190	B6HS	Q203
09482-00191	B7HS	Q204
09482-00192	B8HS	Q205
09482-00195	B7ES	
09482-00196	B8ES	Q201
09482-00198	B8HS	Q205
09482-00205	BPR4HS	
09482-00206	BPR4HS	
09482-00208	BR8EIX	
09482-00209	BR9EIX	
09482-00210	BR10EIX	
09482-00220	DR7ES	
09482-00221	DR8ES	Q217
09482-00222	DR7EA	
09482-00223	DR8EA	
09482-00225	B8ES	Q201
09482-00228	BP5HS	
09482-00229	BPR6HS	Q214
09482-00230	BR8HS	Q212
09482-00233-111	BR9ES	Q208
09482-00234	DR9EA	Q219
09482-00237	B8HS	Q205
09482-00239	BPR8ES	Q213
09482-00240-111	BPR8ES	Q213
09482-00244-111	BPR7HS	Q215
09482-00247-111	BR8ES	Q207
09482-00255	BPR7HS	Q215
09482-00259	BP6HS	
09482-00264	BP6HS-10	
09482-00265	BP6HS-10	
09482-00268	BP8HS	

SUZUKI	→ NGK	Quick
09482-00280	BR8HS-10	
09482-00281	BPR6HS	Q214
09482-00282	B5HS	
09482-00285	BPR6ES-11	
09482-00287	BP5ES-11	
09482-00289	B-4H	
09482-00290	BP-4H	
09482-00291	BP4HS	
09482-00295	C6HSA	
09482-00299	BPR6ES	
09482-00302-111	BPR6HS	Q214
09482-00305	BP5HS	
09482-00306	BPR6HS	Q214
09482-00308	BR5HS	
09482-00309	B5HS	
09482-00314	CR7HSA	
09482-00316	BPR5HS	
09482-00320-111	CR8HSA	
09482-00321	C8HSA	
09482-00322	BPR5EIX	
09482-00325	BR8EIX	
09482-00328	DP9EA-9	
09482-00330	DPR9EA-9	Q222
09482-00331-111	DPR7EA-9	Q220
09482-00332	DP8EA-9	
09482-00333-111	DP8EA-9	
09482-00334	DPR8EA-9	Q221
09482-00335-111	DPR7EA-9	Q220
09482-00340	CR6HS	Q223
09482-00348	BR8ES	Q207
09482-00349	BR9ES	Q208
09482-00351	B9ES	Q202
09482-00352	DP7EA-9	
09482-00354	DPR7EA-9	Q220
09482-00355-111	DPR7EA-9	Q220
09482-00359	BPR5HS	
09482-00360	BR10ES	
09482-00362	ZGR5A	
09482-00366	JR9B	Q224
09482-00367	BPR4HS	
09482-00370	BR8HS-10	
09482-00376	B8HS	Q205
09482-00378	DCPR8E	
09482-00379	DCPR8E	
09482-00383	DCPR8EIX	
09482-00384	DCPR8EIX	
09482-00388	JR9B	Q224
09482-00389	JR9B	Q224
09482-00392	BP6ES	
09482-00397	JR9C	
09482-00398	DR7EA	
09482-00399	DR8EA	





SUZUKI	→ NGK	Quick
09482-00400	DR9EA	Q219
09482-00406	CR6HSA	
09482-00407	CR6HSA	
09482-00408	CR7HSA	
09482-00409	BPR6ES	
09482-00410	CR9EK	Q230
09482-00411	CR9EK	Q230
09482-00412	CR8EK	
09482-00413	CR8EK	
09482-00414	CR7EK	
09482-00416-111	BPR5HS	
09482-00421	BPR6ES-11	
09482-00424	R5184-105	
09482-00430	R0373A-10	
09482-00446	DCPR6E	
09482-00447	DCPR6E	
09482-00448	DCPR7E	
09482-00449	DCPR7E	
09482-00450	DCPR8E	
09482-00452	ZGR5A	
09482-00456	CR8E	Q226
09482-00457	CR8E	Q226
09482-00458	CR9E	Q227
09482-00459	CR9E	Q227
09482-00460	CR10E	
09482-00461	CR10E	
09482-00462	CR10EK	
09482-00463	CR10EK	
09482-00470	BR8ECM	
09482-00472	BR9ECM	
09482-00473	BR9ECM	
09482-00478	B10ES	
09482-00479	DCPR7EIX	
09482-00481	DCPR8EIX	
09482-00482	DCPR7EIX	
09482-00484	DCPR8EIX	
09482-00485	CR8HSA	
09482-00487	BPR6ES	
09482-00488	DCPR7E	
09482-00491	JR8B	
09482-00495	BPR7ES	
09482-00498	BPR7ES	
09482-00499	R4118S-8	
09482-00500	BR9EIX	
09482-00509	R6918B-8	
09482-00511	R6918B-7	
09482-00513	R0045Q-10	
09482-00515	CR7E	Q225
09482-00516	CR7E	Q225
09482-00519	BR9EYA	
09482-00522	BPR7HS-10	
09482-00523	BPR8HS	

SUZUKI	→ NGK	Quick
09482-00528	CR6E	
09482-00530	BPR6HS	Q214
09482-00531	BP6HS	
09482-00537	DCPR9EIX	
09482-00556	CR8EIA-9	
09482-00557	CR9EIA-9	
09482-00558	CR9EIA-9	
09482-00561	BR8EG	
09482-00564	BR9EYA	
09482-00565	KR8AI	
09482-00570	CR8EB	
09482-00581	CR8EKB	
09482-00582	CR9EKB	
09482-00584	CR8EIB-10	
09482-00597	CR8EIA-10	
09482-00600-000	DIMR8A10	
09482-00612	MR8AI9	
09482-69001	BPR6HS	Q214
94820-01197	B9ES	Q202
99000-69571	C7HSA	
99000-69835-B6R	BR6HIX	
99000-69835-B7R	BR7HIX	
99000-69835-B8R	BR8HIX	
99000-69835-BP6	BPR6HIX	
99000-69835-BP7	BPR7HIX	
99000-69835-BR1	BR10EIX	
99000-69835-BR8	BR8EIX	
99000-69835-BR9	BR9EIX	
99000-69835-C6R	CR6HIX	
99000-69835-C7R	CR7HIX	
99000-69835-C8R	CR8HIX	
99000-69835-CR7	CR7EIX	
99000-69835-CR8	CR8EIX	
99000-69835-CR9	B8HCS	
99000-69835-DC7	DPR7EIX-9	
99000-69835-DC8	DCR8EIX	
99000-69835-DR8	DR8EIX	
99000-69835-DR9	DR9EIX	
99000-69835-PR8	DPR8EIX-9	
99000-69835-PR9	DPR9EIX-9	
99000-79A37-16E	BPR5EIX	
99000-79A37-20F	BR6HIX	
99000-79A37-22E	BR7EIX	
99000-79A37-24E	BR8EIX	
99000-79A37-24R	BR8EIX	
99000-79A37-27R	BR9EIX	
99000-79A37-29E	BR10EIX	
99000-79A37-31E	BR10EIX	
99000-79A37-K0P	BKR6EIX-11	
99000-79A37-U2F	CR7HIX	
99000-79A37-U7E	CR9EIX	
99000-79A37-W6X	BPR5EIX	





SUZUKI	→ NGK	Quick
99000-79A45-B0E	BR10EIX	
99000-79A45-B6H	BR6HIX	
99000-79A45-B7E	BR7EIX	
99000-79A45-B7H	BR7HIX	
99000-79A45-B8E	BR8EIX	
99000-79A45-B8H	BR8HIX	
99000-79A45-B9E	BR9EIX	
99000-79A45-P8E	BPR8EIX	
99000-79J80-K16	BKR5EIX-11	
99000-79J80-K20	BKR6EIX-11	
99000-79J80-U22	DCPR7EIX	
99000-79J80-W16	BPR5EIX-11	
99000-79J80-W20	BPR6EIX-11	
99000-79J80-W22	BPR7EIX	
99000-79K24-22B	DPR7EIX-9	
99000-79K24-24B	DPR8EIX-9	
99000-79K24-27B	DPR9EIX-9	
99000-79K24-F22	CR7HIX	
99000-79K24-F24	CR8HIX	
99000-79K24-H24	CR8EHIX-9	
99000-79K24-H27	CR9EHIX-9	
99000-79K24-IW4	BR8EIX	
99000-79K24-IW7	BR9EIX	
99000-79K24-U22	CR7EIX	
99000-79K24-U24	CR8EIX	
99000-79K24-U27	B8HCS	
99000-79K24-W22	BR7HIX	
99000-79K24-W24	BR8HIX	
99000-79K24-W27	BR9HIX	
99000-79K24-W31	BR10EIX	
99000-79K24-X24	DR8EIX	
99000-79K24-X27	DR9EIX	
99000-79K60-BP6	BPR6EIX-11	
99000-79K60-DC7	DCPR7EIX	
99000-79K60-K5R	BKR5EIX	
99000-79K60-K6R	BKR6EIX	
99000-79K60-KR6	BKR6EIX-11	
99000-79K60-P5R	BPR5EIX	
99000-79K60-P6R	BPR6EIX	
99000-79K60-P7R	BPR7EIX	
99000-79K60-PR5	BPR5EIX-11	
TACTI	→ NGK	Quick
V 9110 2011	DCPR7E	
V 9110 2015	BPR4EY	
V 9110 2024	BPR7ES	
V 9110 2030	DCPR8E	
V 9110 2035	BKR7E-11	
V 9110 2203	BKR5EIX-11	
V 9110 2204	BKR6EIX-11	
V 9110 2205	BKR7EIX-11	

TACTI	→ NGK	Quick
V 9110 2206	BPR5EIX	
V 9110 2207	BPR6EIX	
V 9110 2208	DCPR7EIX	
V 9110 2209	DCPR8EIX	
V 9110 2210	BR8EIX	
V 9110 2211	BR9EIX	
V 9110 2212	BR9EIX	
V 9110 2213	BPR7EIX	
V 9110 2303	BKR5EIX-11	
V 9110 2304	BKR6EIX-11	
V 9110 2305	BPR5EIX-11	
V 9110 2306	BPR6EIX-11	
V 9110 2307	BPR7EIX	
V 9110 2308	DCPR7EIX	
V 9110 3007	BCPR6E	
V 9110 3013	BPR4EY	
V 9110 3025	B5ES	
V 9110 3030	BPR5EIX	
V 9110 3033	BR5HS	
V 9110 3034	B5HS	
V 9110 3035	B-6L	
V 9110 3043	BP6ES	
V 9110 3047	BPR6ES	
V 9110 3049	BPR6ES-11	
V 9110 3051	B6ES	
V 9110 3057	BR6ES	
V 9110 3064	BPR6EIX-11	
V 9110 3065	BPR6EIX	
V 9110 3068	BP6HS	
V 9110 3072	BR6HS	Q209
V 9110 3073	B6HS	Q203
V 9110 3075	B6S	Q302
V 9110 3076	BR6S	
V 9110 3088	BPR7ES	
V 9110 3093	B7ES	
V 9110 3095	BR7EIX	
V 9110 3098	BR7ES	
V 9110 3160	BKR5EIX-11	
V 9110 3162	BKR6EIX-11	
V 9110 3166	BKR5EIX-11	
V 9110 3173	PZFR6F	
V 9110 3177	DCPR8E	
V 9110 3178	DCPR6E	
V 9110 3179	DCPR7E	
V 9110 3180	DCPR8E	
V 9110 3192	BKR7E-11	
V 9110 3216	BPR5EIX-11	
V 9110 3231	BPR5EIX	
V 9110 3234	DCPR8EIX	
V 9110 3241	BPR6EIX	
V 9110 3242	DCPR7EIX	
V 9110 3243	DCPR8EIX	





TACTI	→ NGK	Quick
V 9110 3262	BKR6EIX-11	
V 9110 3268	BPR6HS-10	
V 9110 3293	BKR5EIX-11	
V 9110 3304	BKR6EKC	
V 9110 4002	C6HSA	
V 9110 4004	CR6HSA	
V 9110 4006	C7HSA	
V 9110 4008	CR7HSA	
V 9110 4012	B-4H	
V 9110 4013	BP-4H	
V 9110 4014	BP4HS	
V 9110 4019	BP5HS	
V 9110 4021	BP7HS	
V 9110 4024	BR7HS	Q211
V 9110 4025	B7HS	Q204
V 9110 4027	B7S	
V 9110 4028	BP8ES	
V 9110 4030	B8ES	Q201
V 9110 4032	BR8EIX	
V 9110 4033	BR8ES	Q207
V 9110 4034	B8EG	
V 9110 4037	BR8HS	Q212
V 9110 4038	B8HS	Q205
V 9110 4045	BR9ES	Q208
V 9110 4046	B9ES	Q202
V 9110 4047	B9EG	
V 9110 4048	BR9EIX	
V 9110 4052	B9HS	
V 9110 4054	BR9HS	
V 9110 4057	BR10EIX	
V 9110 4062	B10ES	
V 9110 4063	BR10EIX	
V 9110 4076	D6EA	
V 9110 4078	D6HA	
V 9110 4086	DPR7EA-9	Q220
V 9110 4089	DR7EIX	
V 9110 4090	D7EA	
V 9110 4091	DR7EA	
V 9110 4096	DPR7EA-9	Q220
V 9110 4099	D8EA	Q216
V 9110 4100	DR8EIX	
V 9110 4101	DR8EA	
V 9110 4103	D8HA	
V 9110 4111	DPR7EA-9	Q220
V 9110 4114	D9EA	
V 9110 4115	DR9EIX	
V 9110 4116	DR9EA	Q219
V 9110 4119	D10EA	
V 9110 4122	DR9EIX	
V 9110 4126	CR8E	Q226
V 9110 4127	CR8EH-9	Q228
V 9110 4129	CR9EH-9	Q229

TACTI	→ NGK	Quick
V 9110 4131	CR9E	Q227
V 9110 4149	BP6HSA	
V 9110 4155	CR9EK	Q230
V 9110 4157	D6EA	
V 9110 4158	CR8EK	
V 9110 4159	BR9ECM	
V 9110 5060	BKUR6ET	
V 9110 5068	PTR5A-13	
V 9110 5303	BKR5EIX-11	
V 9110 5304	BKR6EIX-11	
V 9110 5305	BPR5EIX-11	
V 9110 5306	BPR6EIX-11	
V 9110 5307	BPR7EIX	
V 9110 5308	DCPR7EIX	
V 9110 5316	BR8EIX	
V 9110 5317	BR9EIX	
V 9110 5319	BR10EIX	
V 9110 5326	TR6IX	
V 9110 5361	CR7EIX	
V 9110 5362	CR8EIX	
V 9110 5363	B8HCS	
V 9110 5368	CR8EHIX-9	
V 9110 5369	CR9EHIX-9	
V 9110 5372	DR8EIX	
V 9110 5373	DR9EIX	
V 9110 5375	DPR7EIX-9	
V 9110 5376	DPR8EIX-9	
V 9110 5377	DPR9EIX-9	
V 9110 5379	BR7HIX	
V 9110 5380	BR8HIX	
V 9110 5381	BR9HIX	
V 9110 5383	CR7HIX	
V 9110 5384	CR8HIX	
V 9110 5391	BR8ECMIX	
V 9110 5392	BR9ECMIX	
V 9110 5393	BR10ECMIX	
V 9110 6006	BP-4	
V 9110 6008	B-4	
V 9110 6009	B4ES	
V 9110 6021	BP-4	
V 9110 6022	BM6A	Q303
V 9110 6023	BPM6A	Q304
V 9110 6027	BPM7A	Q305
V 9110 6028	B9HS-10	
V 9110 6037	BP6HS-10	
V 9110 6044	BPR2ES	
V 9110 6046	BPR2ES	
TORCH	→ NGK	Quick
8 012	BPR6EIX	
A 6 RTC	CR6HSA	





TORCH	→ NGK	Quick
A 6 TC	C6HSA	
A 7 RTC	CR7HSA	
A 7 T	C7HSA	
A 7 TC	C7HSA	
A 8 RTC	CR8HSA	
A 8 TC	C8HSA	
B 8 RC	CR8E	Q226
C 6 RTC	D6HA	
D 6 RTC 9	DPR6EA-9	
D 7	D7EA	
D 7 CA	D7EA	
D 7 RC	D7EA	
D 7 RTC	DPR7EA-9	Q220
D 7 RTC 9	DPR7EA-9	Q220
D 7 TC	DP7EA-9	
D 8 C	D8EA	Q216
D 8 RC	DR8EA	
D 8 RTC	DR8EA	
D 8 T	D8EA	Q216
DK 7 RTC	DCPR7E	
E 4 RTC	BPR4HS	
E 4 TC	BP4HS	
E 5 RTC	BPR5HS	
E 5 T	BP-4H	
E 5 TC	BP5HS	
E 6 RC	BR6HS	Q209
E 6 RTC	BPR6HS	Q214
E 6 T	BP4HS	
E 7 C	B6HS	Q203
E 8 RC	BR8HS	Q212
E 8 RTC	BPR8HS	
F 5 C	B4ES	
F 5 RTC	BPR5ES	
F 5 TC	BP5ES	
F 6 RTC	BPR6ES	
F 6 T	BP6ES	
F 7 C	B7ES	
F 7 RC	BR7ES	
F 7 RTC	BPR7ES	
F 8 RC	BR8ES	Q207
F 8 RTC	BP8ES	
G 3 F	B-4	
G 3 TC	BP-4	
G 4 C	B-4	
G 4 RC	B-4	
G 5 RC	BR6S	
G 6	B6S	Q302
G 6 C	B6S	Q302
G 6 RC	BR6S	
H 5	B6S	Q302
K 5 RTC 11	BKR5ES-11	
K 5 TC	BKR5ES-11	

TORCH	→ NGK	Quick
K 6 RF	BKR6ES	
K 6 RTC 11	BKR6ES-11	
K 7 RTC	BKR6ES	
L 6	BM6A	Q303
L 6 C	BM6A	Q303
L 6 RC	BMR6A	Q307
L 6 T	BPM6A	Q304
L 6 TC	BPM6A	Q304
L 7 T	BPM7A	Q305
L 7 TC	BPM7A	Q305
L 9 T	BPM7A	Q305
Q 6 TC	BP6EFS	
R 4 C	AB-6	
T 1137 C	C7HSA	
TOYOTA	→ NGK	Quick
04195-34140	BP5ES	
04195-34150	BP6ES	
90098-00835	BUHX	
90098-09775	BP-4	
90098-09815	BP-4	
90098-14055	B4ES	
90098-14425	BPR4EY	
90098-14515	BP-4H	
90098-14645	B-4H	
90098-14685	BP4HS	
90098-14715	B-4	
90098-14775	BP-4	
90098-14815	BP-4	
90098-16325	BPR5ES	
90098-16455	B5ES	
90098-16505	B5ES	
90098-16515	BP5HS	
90098-16645	B5ES	
90098-17015	AB-6	
90098-17025	AB-6	
90098-20276	B6S	Q302
90098-20325	BPR6ES	
90098-20355	BM6A	Q303
90098-20415	C6HSA	
90098-20455	B6ES	
90098-20465	D6EA	
90098-20485	D6HA	
90098-20505	B6ES	
90098-20515	BP6HS	
90098-20525	BP6HSA	
90098-20545	BPR6EIX-11	
90098-20635	BP6EFS	
90098-20645	B6HS	Q203
90098-20695	BP6ES	
90098-20745	BPR6ES	
90098-20765	C6HSA	





TOYOTA	→ NGK	Quick
90098-20885	BP6EFS	
90098-20905	BR6ES	
90098-20925	BP6HS-10	
90098-20935	BR6ES	
90098-22015	AB-7	
90098-22025	AB-7	
90098-22276	B7S	
90098-22325	BPR7ES	
90098-22415	C7HSA	
90098-22455	B7ES	
90098-22465	D7EA	
90098-22475	DR7EA	
90098-22505	B7ES	
90098-22515	BP7HS	
90098-22645	B7HS	Q204
90098-22745	BPR7ES	
90098-22765	C7HSA	
90098-22905	BR7ES	
90098-22935	BR7ES	
90098-24125	BP8ES	
90098-24276	B8S	
90098-24465	D8EA	Q216
90098-24475	DR8EA	
90098-24485	D8HA	
90098-24495	DR8HS	
90098-24505	B8ES	Q201
90098-24645	B8HS	Q205
90098-24695	BP8ES	
90098-24935	BR8ES	Q207
90098-25305	B8EG	
90098-25375	BR8HIX	
90098-27305	B9EG	
90098-27465	D9EA	
90098-27475	DR9EA	Q219
90098-27505	B9ES	Q202
90098-27645	B9HS	
90098-27935	BR9ES	Q208
90098-31305	B10EG	
90098-31465	D10EA	
90098-31505	B10ES	
90098-66016	B-6L	
90098-66024	BR5HS	
90098-66032	BPR5EIX	
90098-66033	BPR5EIX	
90098-66054	BKR5EIX-11	
90098-66077	BKR5EIX-11	
90098-66114	BKR5EIX-11	
90098-66116	BPR5EIX-11	
90098-70003	BPR6ES-11	
90098-70004	BPR6ES-11	
90098-70023	CR6HSA	
90098-70024	BR6HS	Q209

TOYOTA	→ NGK	Quick
90098-70025	BR6S	
90098-70030	BPM6A	Q304
90098-70032	BPR6EIX	
90098-70033	BPR6EIX	
90098-70043	BP6ES	
90098-70050	BPR6EIX-11	
90098-70051	DCPR6E	
90098-70054	BKR6EIX-11	
90098-70058	BPR6ES	
90098-70077	BKR6EIX-11	
90098-70081	PZFR6F	
90098-70082	BCPR6E	
90098-70106	BPR6HS-10	
90098-70114	BKR6EIX-11	
90098-70116	BPR6EIX-11	
90098-72021	DPR7EA-9	Q220
90098-72023	CR7HSA	
90098-72024	BR7HS	Q211
90098-72030	BPM7A	Q305
90098-72036	BR7EIX	
90098-72037	DR7EIX	
90098-72047	BKR7E-11	
90098-72051	DCPR7E	
90098-72116	BPR7EIX	
90098-74013	B8EG	
90098-74021	DPR7EA-9	Q220
90098-74024	BR8HS	Q212
90098-74036	BR8EIX	
90098-74037	DR8EIX	
90098-74042	DP8EA-9	
90098-74051	DCPR8E	
90098-74052	DCPR8EIX	
90098-77013	B9EG	
90098-77014	B9HS-10	
90098-77019	DPR9Z	
90098-77021	DPR7EA-9	Q220
90098-77024	BR9HS	
90098-77036	BR9EIX	
90098-77037	DR9EIX	
90098-77088	C9E	
90098-77102	JR9B	Q224
90098-77111	CR9EHIX-9	
90098-79036	BR10EIX	
90098-79037	DR9EIX	
90098-81036	BR10EIX	
90098-81089	CR10EK	
90919-01051	BPR5ES	
90919-01073	B5ES	
90919-01095	BPR5EIX-11	
90919-01096	BPR5EIX-11	
90919-01103	BPR4EY	





YAMAHA	→ NGK	Quick
90793-20001	BR7EIX	
90793-20002	BR8EIX	
90793-20003	BR9EIX	
90793-20004	BR10EIX	
90793-20005	BR6HIX	
90793-20006	BR7HIX	
90793-20007	BR8HIX	
90793-20008	BPR8EIX	
90793-20010	DR7EIX	
90793-20011	DR8EIX	
90793-20012	DR9EIX	
90793-20013	DPR8EIX-9	
90793-20014	DPR9EIX-9	
90793-20015	CR7HIX	
90793-20016	CR8HIX	
90793-20017	BR10HIX	
90793-20018	BR10EIX	
90793-20021	DR7EIX	
90793-20022	DR8EIX	
90793-20023	DR9EIX	
90793-20024	BPR5EIX	
90793-20025	BPR8EIX	
90793-20026	BPR9EIX	
90793-20028	B85EGV	
90793-20029	B95EGV	
90793-20030	B105EGV	
90793-20031	BR10EIX	
90793-20032	B10EG	
90793-20035	BP-4H	
90793-20039	BP6HSA	
90793-20040	BP5ES-11	
90793-20051	D8HA	
90793-20053	D10EA	
90793-20057	BR6HS	Q209
90793-20060	BR6ES	
90793-20062	BPR8ES	Q213
90793-20071	CR7HS	
90793-20072	CR8HS	
90793-20075	DR8HS	
90793-20076	DR7ES	
90793-20077	DR8ES	Q217
90793-20080	DPR7EA-9	Q220
90793-20081	CR7HIX	
90793-20082	CR8HIX	
90793-20083	DPR8EIX-9	
90793-20084	DPR9EIX-9	
90793-20085	BPR6HIX	
90793-20086	BPR7HIX	
90793-20090	BPM7A	Q305
90793-20099	BR9HIX	
90793-20100	BR10HIX	
90793-20101	BPR6HIX	

YAMAHA	→ NGK	Quick
90793-20102	BPR7HIX	
90793-20103	BPR8HIX	
90793-20106	BPR5EIX	
90793-20107	BPR6EIX	
90793-20108	BPR5EIX-11	
90793-20109	BPR6EIX-11	
90793-20110	BPR7EIX	
90793-20112	BR8EIX	
90793-20115	BR10EIX	
90793-20116	BPR5EIX	
90793-20117	BPR6EIX	
90793-20118	BR9EIX	
90793-20119	DPR8EIX-9	
90793-20120	DPR9EIX-9	
90793-20122	CR8EIX	
90793-20123	CR9EIX	
90793-20124	CR8EIX	
90793-20125	CR9EIX	
90793-20129	BPR7HS-10	
90793-20131	BR5HS	
90793-20132	CR6HSA	
90793-20133	CR7HSA	
90793-20134	BR8EG	
90793-20135	BR9EG	
90793-20136	BR10EG	
90793-20138	BPR6EIX	
90793-20139	BR8ECM	
90793-20149	R0373A-10	
90793-20150	CR8EIX	
90793-20151	B8HCS	
90793-20152	DR8EIX	
90793-20153	DR9EIX	
90793-20154	DPR8EIX-9	
90793-20155	DPR9EIX-9	
90793-20156	BPR6HIX	
90793-20157	BPR7HIX	
90793-20158	BR6HIX	
90793-20159	BR7HIX	
90793-20160	BR8EIX	
90793-20161	BR9EIX	
90793-20162	CR8EHIX-9	
90793-20163	CR9EHIX-9	
90793-20164	BR8HIX	
90793-20165	BR10EIX	
90793-20166	BPR8HIX	
90793-20167	BPR5EIX	
90793-20168	BPR6EIX	
90793-20170	CR6HIX	
90793-20171	CR7HIX	
90793-20172	CR7EIX	
90793-20173	DPR7EIX-9	
90793-20174	CR8HIX	





YAMAHA	→ NGK	Quick
90793-20175	BPR7EIX	
90793-22001	BR8HIX	
90793-22003	DPR7EIX-9	
90793-22008	B5ES	
90793-22010	B9ES	Q202
90793-22031	BR7HS	Q211
90793-22032	BR8HS	Q212
90793-22034	BR8HS-10	
90793-22035	BR6ES	
90793-22036	BR7ES	
90793-22037	BR9ES	Q208
90793-22039	BR8HS	Q212
90793-22047	DPR7EA-9	Q220
90793-22059	CR7HIX	
90793-22064	BR9EIX	
90793-22065	BR9EIX	
90793-22086	CR9EIX	
90793-22088	BR8EIX	
90793-22089	BR9EIX	
90793-22091	BR10EIX	
90793-22093	CR7EIX	
90793-22094	CR8EIX	
90793-22095	B8HCS	
90793-22096	CR8EHIX-9	
90793-22097	CR9EHIX-9	
90793-22098	DPR7EIX-9	
90793-22099	DPR8EIX-9	
90793-22100	DPR9EIX-9	
90793-22101	BPR7EIX	
90793-22107	DR8EIX	
90793-22108	DR9EIX	
90793-22109	BR7HIX	
90793-22110	BR8HIX	
90793-22111	BR9HIX	
90793-22112	BPR5EIX-11	
90793-22114	CR7HIX	
90793-22115	CR8HIX	
9079E-NG001	BR8EIX	
9079E-NG002	BR9EIX	
9079E-NG003	BR10EIX	
9079E-NG004	BR8EIX	
9079E-NG005	BR9EIX	
90890-78065	D6HA	
90890-78066	D6EA	
90890-78068	DP9EA-9	
90890-78070	B9HS-10	
90890-78071	BP8HS	
90890-78073	BP4HA	
90890-78074	BM6A	Q303
90890-78076	BPM6A	Q304
90890-78077	BR9HS	
90890-78078	BPR7EIX	

YAMAHA	→ NGK	Quick
90890-78079	BPR6EIX	
90890-78082	BR10EIX	
90890-78086	BR8ES	Q207
90890-78094	B6HS	Q203
90890-78097	BP4HS	
90890-78102	BM6A	Q303
90890-78106	BPR7EIX	
90890-78108	BR7EIX	
90890-78110	BR9EIX	
90890-78111	BR10EIX	
90890-78112	BR10EIX	
90890-78115	BR9HIX	
90890-78116	BR10HIX	
90890-78118	DR8EIX	
90893-22113	BPR6EIX-11	
94700-00039	B6HS	Q203
94700-00040	B7HS	Q204
94700-00041	B8HS	Q205
94700-00043	B6ES	
94700-00044	B7ES	
94700-00045	B8ES	Q201
94700-00050	BP7HS	
94700-00108	BP6HS	
94700-00110	BR7HS	Q211
94700-00111	BR6ES	
94700-00118	BP8ES	
94700-00157	D8EA	Q216
94700-00159	BP4HS	
94700-00168	BP5HS	
94700-00189	D7EA	
94700-00195	BR8HS	Q212
94700-00198	BPR6HS	Q214
94700-00203	DR8ES-L	Q218
94700-00204	BR8ES	Q207
94700-00208	DR7ES	
94700-00218	BPR7ES	
94700-00219	BPR8ES	Q213
94700-00227	BPR7HS	Q215
94700-00232	BP6HS-10	
94700-00234	BPR6ES	
94700-00241	DPR8EA-9	Q221
94700-00248	BR6HS	Q209
94700-00250	CR7HS	
94700-00254	C7HSA	
94700-00256	C6HSA	
94700-00258	BPR4HS	
94700-00261	BR9ES	Q208
94700-00262	DPR7EA-9	Q220
94700-00263	DP7EA-9	
94700-00268	BP8HS	
94700-00275	DP8EA-9	
94700-00280	BPR8HS	





YAMAHA	→ NGK	Quick
94700-00282	CR6HS	Q223
94700-00292	BPR6HS-10	
94700-00318	CR9E	Q227
94700-00330	CR8E	Q226
94700-00333	DR8EA	
94700-00336	BPR5HS	
94700-00340	DR9EA	Q219
94700-00345	DR7EA	
94700-00353	CR7E	Q225
94700-00361	DPR9EA-9	Q222
94700-00366	CR7HSA	
94700-00372	CR6HSA	
94700-00375	DPR6EA-9	
94700-00381	CR6E	
94700-00394	R0373A-10	
94700-00397	B9HS	
94700-00402	CR10EK	
94700-00403	CR9EK	Q230
94700-00408	CR9EIA-9	
94700-00410	CR9E	Q227
94700-00411	CR8E	Q226
94700-00420	CPR7EA-9	
94700-00424	LMAR9E-J	
94700-00825	BP7HS-10	
94700-00835	C7HSA	
94700-00835-00IV	C7HSA	
94700-00840	CR7E	Q225
94700-00841	C6HSA	
94700-00850	C6HSA	
94700-00850-00IV	C6HSA	
94700-00856	CR7HSA	
94700-00866	CPR8EA-9	
94700-00871	CPR9EA-9	
94700-00879	CR6HSA	
94701-00039	B6HS	Q203
94701-00040	B7HS	Q204
94701-00041	B8HS	Q205
94701-00042	B9HS	
94701-00043	B6ES	
94701-00044	B7ES	
94701-00045	B8ES	Q201
94701-00046	B9ES	Q202
94701-00048	B8HCS	
94701-00050	BP7HS	
94701-00061	BR8EIX	
94701-00063	BR9EIX	
94701-00069	B5HS	
94701-00078	B5ES	
94701-00108	BP6HS	
94701-00110	BR7HS	Q211
94701-00111	BR6ES	
94701-00112	BR7ES	

YAMAHA	→ NGK	Quick
94701-00113	BR8EIX	
94701-00116	BP6ES	
94701-00118	BP8ES	
94701-00148	BR8HIX	
94701-00157	D8EA	Q216
94701-00159	BP4HS	
94701-00168	BP5HS	
94701-00188	BR9ES	Q208
94701-00189	D7EA	
94701-00193	BR9EIX	
94701-00194	BPR5HS	
94701-00195	BR8HS	Q212
94701-00198	BPR6HS	Q214
94701-00203	DR8ES-L	Q218
94701-00204	DR8ES	Q217
94701-00208	DR7ES	
94701-00218	BPR7ES	
94701-00219	BPR8ES	Q213
94701-00227	BPR7HS	Q215
94701-00232	BP6HS-10	
94701-00234	BPR6ES	
94701-00241	DPR8EA-9	Q221
94701-00247	BR8HS-10	
94701-00248	BR6HS	Q209
94701-00250	CR7HS	
94701-00251	BR9HS	
94701-00254	C7HSA	
94701-00256	C6HSA	
94701-00258	BPR4HS	
94701-00262	DPR7EA-9	Q220
94701-00263	DP7EA-9	
94701-00264	BP7HS-10	
94701-00266	D9EA	
94701-00267	BP8ES	
94701-00268	BP8HS	
94701-00275	DP8EA-9	
94701-00280	BPR8HS	
94701-00282	CR6HS	Q223
94701-00284	BPR6EIX	
94701-00285	BPR6EIX	
94701-00287	DR8ES	Q217
94701-00292	BPR6HS-10	
94701-00315	C9E	
94701-00318	CR9E	Q227
94701-00324	BR9EG	
94701-00325	B9EG	
94701-00328	BPR5ES	
94701-00330	CR8E	Q226
94701-00332	R5184-105	
94701-00333	DR8EA	
94701-00340	DR9EA	Q219
94701-00345	DR7EA	





YAMAHA	→ NGK	Quick
94701-00349	BR7ES	
94701-00353	CR7E	Q225
94701-00356	BR10ES	
94701-00358	C7E	
94701-00361	DPR9EA-9	Q222
94701-00366	CR7HSA	
94701-00372	CR6HSA	
94701-00375	DPR6EA-9	
94701-00381	CR6E	
94701-00386	CR10EK	
94701-00395	CR9EK	Q230
94701-00402	CR10EK	
94701-00403	CR9EK	Q230
94701-00407	CR9EIA-9	
94701-00408	CR9EIA-9	
94701-00410	CR9E	Q227
94701-00411	CR8E	Q226
94701-00415	CPR8EA-9	
94701-00420	CPR7EA-9	
94701-00422	LMAR7A-9	
94701-00423	LMAR6A-9	
94701-00424	LMAR9E-J	
94701-00434	LMAR8G	
94701-00N02	BR9EIX	
94702-00039	B6HS	Q203
94702-00040	B7HS	Q204
94702-00041	B8HS	Q205
94702-00044	B7ES	
94702-00045	B8ES	Q201
94702-00046	B9ES	Q202
94702-00069	B5HS	
94702-00111	BR6ES	
94702-00149	B7HS	Q204
94702-00188	BR9ES	Q208
94702-00193	BR9EIX	
94702-00195	BR8HS	Q212
94702-00204	BR8ES	Q207
94702-00227	BPR7HS	Q215
94702-00234	BPR6ES	
94702-00247	BR8HS-10	
94702-00248	BR6HS	Q209
94702-00249	BR5HS	
94702-00251	BR9HS	
94702-00272	BR7HS	Q211
94702-00317	B9HS-10	
94702-00323	B8EG	
94702-00324	BR9EG	
94702-00325	B9EG	
94702-00326	BR8EG	
94702-00331	BPR4ES	
94702-00348	BPR2ES	
94702-00349	BR7ES	

YAMAHA	→ NGK	Quick
94702-00351	BP8ES	
94702-00356	BR10ES	
94702-00357	BR9ECM	
94702-00367	B10EG	
94702-00368	BR10EG	
94702-00373	R7376-10	
94702-00374	R7282-105	
94702-00383	BR9ECS	
94702-00384	BR10ECS	
94702-00391-0	B6HS	Q203
94702-00401	BKR6ES-11	
94702-00403	CR9EKB	
94702-00409	CR9EB	
94702-00428	CPR8EB-9	
94702-00803	BP7HS-10	
94702-00808	BR8ES	Q207
94703-00001	B-4H	
94703-00039	B6HS	Q203
94703-00040	B7HS	Q204
94703-00041	B8HS	Q205
94703-00042	B9HS	
94703-00043	B6ES	
94703-00044	B7ES	
94703-00045	B8ES	Q201
94703-00046	B9ES	Q202
94703-00050	BP7HS	
94703-00059	BR7HIX	
94703-00060	BR9HIX	
94703-00062	BR6HIX	
94703-00065	BR7EIX	
94703-00069	B5HS	
94703-00074	BR8EIX	
94703-00075	BR9EIX	
94703-00078	B5ES	
94703-00108	BP6HS	
94703-00110	BR7HS	Q211
94703-00112	BR7ES	
94703-00113	BR8EIX	
94703-00114	BR9EIX	
94703-00116	BP6ES	
94703-00118	BP8ES	
94703-00133	BP5ES	
94703-00143	BR8HIX	
94703-00148	BR8HIX	
94703-00157	D8EA	Q216
94703-00159	BP4HS	
94703-00168	BP5HS	
94703-00181	D8EA	Q216
94703-00188	BR9ES	Q208
94703-00189	D7EA	
94703-00194	BPR5HS	
94703-00198	BPR6HS	Q214



YAMAHA	→ NGK	Quick
94703-00203	DR8ES-L	Q218
94703-00204	BR8ES	Q207
94703-00207	B4ES	
94703-00214	C6HSA	
94703-00216	C7HSA	
94703-00218	BPR7ES	
94703-00220	BPR7ES	
94703-00222	DR8EA	
94703-00223	BP6HS	
94703-00227	BPR7HS	Q215
94703-00232	BP6HS-10	
94703-00234	BPR6ES	
94703-00235	BPR6HS-10	
94703-00241	DPR7EA-9	Q220
94703-00254	C7HSA	
94703-00256	C6HSA	
94703-00258	BPR4HS	
94703-00262	DPR7EA-9	Q220
94703-00263	DP7EA-9	
94703-00264	BP7HS-10	
94703-00265	CR7HSA	
94703-00266	D9EA	
94703-00267	BP8ES	
94703-00275	DP8EA-9	
94703-00277	BR9EIX	
94703-00279	BR8EIX	
94703-00282	CR6HS	Q223
94703-00307	C9E	
94703-00314	C8E	
94703-00315	C9E	
94703-00318	CR9E	Q227
94703-00319	CR9E	Q227
94703-00323	B8EG	
94703-00325	B9EG	
94703-00327	BPR7HS	Q215
94703-00328	BPR5ES	
94703-00329	CR8E	Q226
94703-00330	CR8E	Q226
94703-00331	BPR4ES	
94703-00332	R5184-105	
94703-00333	DR8EA	
94703-00340	DR9EA	Q219
94703-00345	DR7EA	
94703-00352	CR7E	Q225
94703-00353	CR7E	Q225
94703-00355	BR7HS	Q211
94703-00381	CR6E	
94703-00410	CR9E	Q227
94703-00411	CR8E	Q226
94703-00420	CPR7EA-9	
94703-00422	LMAR7A-9	
94703-00423	LMAR6A-9	

[illegible]

Discontinued Products



IGNITION
PARTS



VEHICLE
ELECTRONICS



A-6	AB-6
A6FS	A6FS
A-7	AB-7
A7FS	A7FS
A-8	AB-8
A-8F	A8FS
A8FS	A8FS
A-8V	AB-8
A-9F	A9FS
A9FS	A9FS
A-9V	AB-8
AP5FS	AP5FS
AP6F	AP6FS
AP6FS	AP6FS
AP6FS	AP6FS
AP7FS	AP7FS
AP8FS	AP8FS
AP9FS	AP9FS
APR5FS	APR5FS
APR5FS-11	APR5FS
APR5FS-15	APR5FS
APR6F	AP6FS
APR6FS	APR6FS
AR6FS	AR6FS
B105EGP	–
B105EGV	BR10EIX
B10ECS	BR10ECS
B10EGP	R7376-10
B10EGV	BR10EIX
B10EV	BR10EIX
B10EVX	BR10EIX
B10FS	R5673-10
B10H	B10HS
B10HN	R5525-10
B10HP	R5530-10
B10HV	BR10HIX
B10HVX	BR10HIX
B11EGP	–
B11EGV	BR10EIX
B11EN	BR10EIX
B11HN	R5525-11
B11HP	R5525-11
B-2-10	B-2
B-4-10	B-4
B5EB	BR5ES
B5EB-11	BUR5EB-11
B5ES-11	B5ES
B5EV	–
B6EB-L-11	BR6ES
B6EFS	BR6EF
B6EMV	B6EM
B6ET	B6EM
B6EV	B6EVX

B6FS	BR6FS
B6HV	BR6HIX
B6HVX	BR6HIX
B-77-HC	B8HCS
B7EB	BR7ES
B7EB-11	BUR7EB-11
B7ET	BR7ET
B7EV	BR7EIX
B7EVX	BR7EIX
B7HV	BR7HIX
B7HVX	BR7HIX
B85EGP	–
B8EGP	BR8EIX
B8EGV	BR8EIX
B8EM	BR8EM
B8EMV	BR8ET
B8EN	BR8EIX
B8ES-11	B8ES
B8ET	BR8ET
B8EV	BR8EIX
B8EVX	BR8EIX
B8HN	R5525-8
B8HV	BR8HIX
B8HVX	BR8HIX
B95EGP	–
B95EGV	BR10EIX
B9EGP	BR9EIX
B9EGV	BR9EIX
B9EM	–
B9EN	BR9EIX
B9EV	BR9EIX
B9EVX	BR9EIX
B9HCV	BR9HIX
B9HN	BR9HIX
B9HP	R5530-9
B9HV	BR9HIX
B9HVX	BR9HIX
BCP4ES	BCPR4ES-11
BCP4ES-11	BCPR4ES-11
BCP5E-11	BCPR5E-11
BCP5ES	BCPR5ES
BCP5ET	BCPR5ET
BCP5EV	BCPR5EIX
BCP5EV-11	BCPR5EIX-11
BCP5EVX	BCPR5EIX
BCP5EVX-11	BCPR5EIX-11
BCP5EY-11	BCPR5EY-11
BCP5EY-N-11	–
BCP6E-11	BKR6E-11
BCP6ES	BCPR6ES
BCP6EV	BCP6EVX
BCP6EV-11	BCPR6EIX-11
BCP6EVX	BCPR6EIX





BCP6EVX-11	BCPR6EIX-11
BCP7E	BCPR7E
BCP7E-11	BCPR7E-11
BCP7ES-11	BKR7E-11
BCP7EV	BCPR7EIX
BCP7EVX	BCPR7EIX
BCPR4E-11	BCPR4ES-11
BCPR4ES	BCPR4ES-11
BCPR5EP-11	BCPR5EIX-11
BCPR5EP-11	BCPR5EIX-11
BCPR5EP-13	BCPR5EIX-11
BCPR5EP-13	BCPR5EIX-11
BCPR5EP-8	BCPR5EP-8
BCPR5EP-8	–
BCPR5ES	BCPR5ES
BCPR5EVX-11	BCPR5EIX-11
BCPR6EP-11	BCPR6EP-11
BCPR6EP-13	BCPR6EIX-11
BCPR6EP-13	BCPR6EIX-11
BCPR6EP-8	BCPR6EP-8
BCPR6EP-N-11	BCPR6EIX-11
BCPR6EP-N-11	BCPR6EIX-11
BCPR6EP-N-8	BCPR6EP-N-8
BCPR6ER	BKR6EK
BCPR6ES	BCPR6ES
BCPR6ES	BCPR6ES
BCPR6ET	BKUR6ET
BCPR6EVX-11	BCPR6EIX-11
BCPR7EDIX	BCPR7EDIX
BCPR7ER	BKR6EK
BCPR7EVX-11	BKR7EIX-11
BCPR7EY	BCPR7E
BK5EKU	BKR5EKU
BK7E-11	BKR7E-11
BK7EKU	BKR7EKU
BKR4EA-11	BKR4ESA-11
BKR4EQUPA	–
BKR5E	BKR5E
BKR5E-11	BKR5E-11
BKR5EA-11	BKR5ESA-11
BKR5EIX	BKR5EIX
BKR5EIX-11	BKR5EIX-11
BKR5EK	BKR5EK
BKR5EKUP	BKR5EKUP
BKR5EKU-QP	BKR5EQUPA
BKR5EP-11	BKR5EP-11
BKR5EP-8	BKR5EIX-P
BKR5EVX	BKR5EIX
BKR5EVX-11	BKR5EIX-11
BKR5EVXA-11	–
BKR5EVXA-13	PFR5G-13E
BKR6E	BKR6E
BKR6E-11	BKR6E-11

BKR6EIX	BKR6EIX
BKR6EIX-11	BKR6EIX-11
BKR6EIX-LPG	LPG1
BKR6EK	BKR6EK
BKR6EKPA	BKR6EKPA
BKR6EKP-11	BKR6EKP-11
BKR6EQU-QP	BKR6EQUPA
BKR6EP-11	BKR6EP-11
BKR6EP-13	BKR6EP-13
BKR6EP-8	BKR6EP-8
BKR6EP-N-8	–
BKR6EQUP	BKR6EQUP
BKR6EVX	BKR6EIX
BKR6EVX-11	BKR6EIX-11
BKR6EVXA-11	PFR6G-13E
BKR6EVXA-13	PFR6G-13E
BKR7EIX-11	BKR7EIX-11
BKR7E-N	BKR7E
BKR7EVX	BKR7EIX
BKR7EVX-11	BKR7EIX-11
BKR7EY-11	BKR7E-11
BKR8ES	PFR8B
BKUR5E-11	BKR5E-11
BKUR6EQU	BKR6EQUA
BKUR6ET	BKUR6ET
BKUR6ET-10	BKUR6ET-10
BL-6H	–
BM6A	BM6A
BM7A	BM7A
BMR6A	BMR6A
BMR6A	BMR6A
BMR7F	BM7F
BP10EV	BPR10EIX
BP2HA	BP2HS
BP2HS-10	BP2HS
BP4EFS	TR4IX
BP4ES-13	BPR4ES-13
BP4ES-L-11	–
BP4HM-10	–
BP4HSA	BPR4HSA
BP5EA	BP4EY
BP5EA-11	BP4EY-11
BP5EA-L	BP5EY
BP5EA-L	BP5EY
BP5EA-L-11	BP5EY-11
BP5EJ	BPR5EJ
BP5EK-A	BPR5EK-A
BP5EKN	BPR5EY
BP5ES	BP5ES
BP5ES	BP5ES
BP5ES-L	BP5EY
BP5EV	BPR5EIX
BP5EVX	BPR5EIX





BP5EVX-11	BPR5EIX-11
BP5HA	BP5HS
BP6EA	BP6EY
BP6EA-11	BP6EY-11
BP6EF	BP6EF
BP6EF-13	BPR6EF-13
BP6EFS	BP6EFS
BP6EFS	BP6EFS
BP6EJ	BPR6EY-11
BP6EK	BPR6EK-A
BP6EK-A	BPR6EK-A
BP6EKA-V	BPR6EK-A
BP6EKN	BPR6EKN
BP6ES	BP6ES
BP6ES	BP6ES
BP6ES-13	BPR6EIX-11
BP6EV	BPR6EIX
BP6EVX	BPR6EIX
BP6EVX-11	BPR6EIX-11
BP6HS	BP6HS
BP6HS	BP6HS
BP6HS	–
BP6HV	BPR6HIX
BP6HVX	BPR6HIX
BP7E	BPR7E
BP7EFS	BP7EFS
BP7EFS-13	BP7EFS
BP7EFVX	TR7IX
BP7EKN	BPR7EKN
BP7ES	BPR7ES
BP7EV	BPR7EIX
BP7EVX	BPR7EIX
BP7EVX-11	–
BP7EY-11	BPR7EY-11
BP7HV	BPR7HIX
BP7HVX	BPR7HIX
BP8ES-11	BP8ES
BP8EV	BPR8EIX
BP8EVX	BPR8EIX
BP8FS	R5674-8
BP8HSA	BPR8HSA
BP8HVX	BPR8HIX
BP9EV	BPR9EIX
BP9HVX	–
BPM6A	BPM6A
BPM7A	BPM7A
BPMR6A	BPMR6A
BPMR7A	BPMR7A
BPMR7A	BPMR7A
BPR10EVX	BPR10EIX
BPR-2E	BPR2ES
BPR4ES-L-11	BPR5ES-11
BPR4EVX	GR4IX

BPR4FS-20	BPR4FS-15
BPR4S	BP-4
BPR4S-15	BP-4
BPR5EA	BPR5EY
BPR5EA-11	BPR5EY-11
BPR5EA-L	BPR5EY
BPR5EA-L-11	BPR5EY-11
BPR5EF	BPR5EFS
BPR5EF-13	BPR5EFS-13
BPR5EFVX	TR5IX
BPR5EIX-11	BPR5EIX-11
BPR5EK-A	BPR5EIX-11
BPR5EKU	BPR5EKU
BPR5EP-11	BPR5EP-11
BPR5EP-13	BPR5EP-11
BPR5ES	BPR5ES
BPR5ES	BPR5ES
BPR5ES-15	BPR5ES-13
BPR5EV	BPR5EIX
BPR5EVX	BPR5EIX
BPR5EVX-11	BPR5EIX-11
BPR5HM	–
BPR5S	BP5S
BPR5S-15	BP5S
BPR6EA	BPR5EY
BPR6EF	BPR6EF
BPR6EFIX-10	BPR6EFIX-10
BPR6EFS	BPR6EFS
BPR6EIX-LPG	LPG2
BPR6EP-8	BPR6EP-8
BPR6ES	BPR6ES
BPR6ES	BPR6ES
BPR6ES-13	BPR6EIX-11
BPR6ES-N-11	BPR6ES-11
BPR6EV	BPR6EIX
BPR6EVX	BPR6EIX
BPR6EVX-11	BPR6EIX-11
BPR6E-ZP	PGR6A
BPR6FS-10	BPR6FS
BPR6FS-15	BPR6FS
BPR6HS	BPR6HS
BPR6HVX	BPR6HIX
BPR6S	BP6S
BPR7ES	BPR7ES
BPR7EVX	BPR7EIX
BPR7EY	BPR7EIX
BPR7HS	BPR7HS
BPR7HVX	BPR7HIX
BPR8EVX	BPR8EIX
BPR9EVX	BPR9EIX
BPZ7HS-10	–
BR10ECMVX	BR10ECMIX
BR10EV	BR10EIX





BR10EVX	BR10EIX
BR4ES-11	BR4ES
BR4HSA-9	BPR4HSA
BR5EB	BR5ES
BR5EB-11	BUR5EB-11
BR5EF	–
BR5ES-11	BR5ES
BR5FS-15	BR5FS
BR6EB	BR6ES
BR6EB-11	BUR6EB-11
BR6EB-L	BR7ES
BR6EM	–
BR6ET	B6EM
BR6FS-15	BR6FS
BR7EB	BR7ES
BR7EB-11	BUR7EB-11
BR7EM	B7EM
BR7EQ	–
BR7EQ-14	–
BR7ES-11	BR7ES
BR7EVX	BR7EIX
BR7HS	BR7HS
BR8ECMVX	BR8ECMIX
BR8EIX	BR8EIX
BR8ES	BR8ES
BR8EV	BR8EIX
BR8EVX	BR8EIX
BR8EVX	BR8EIX
BR8HS	BR8HS
BR8HV	BR8HIX
BR8HVX	BR8HIX
BR9ECMVX	BR9ECMIX
BR9ES	BR9ES
BR9EV	BR9EIX
BR9EVX	BR9EIX
BR9EVX	BR9EIX
BRE813L	BR8ET
BU5EB-11	BUR5EB-11
BU6EA-11	BUR6EA-11
BU6EB-11	BUR6EB-11
BU6ET	–
BU7EA-11	BUR7EA-11
BU7EB-11	BUR7EB-11
BUEW	BUE
BUR5EBVX-11	BUR5EB-11
BUR5EQ	–
BUR5ET	BUR5ET
BUR6EBVX-11	–
BUR6EQP	–
BUR6ET	BUR6ET
BUR8EQP	–
BZ8ES	BR8ES
C10H	R0161-10

C4HA	CR4HSA
C6H	C6HSA
C6M	C6HSA
C7EH-9	CR7EH-9
C7HV	CR7HIX
C7HVX	CR7HIX
C8EHVX-9	CR8EHIX-9
C8EVX	CR8EIX
C8HV	CR8HIX
C8HVX	CR8HIX
C9EHVX-9	CR9EHIX-9
C9EVX	CR9EIX
C9H	C8HSA
CPR7EAIX-9	CPR7EAIX-9
CR10EH-9	–
CR8EHVX-9	CR8EHIX-9
CR8EKPA	–
CR8EVX	CR8EIX
CR8HVX	CR8HIX
CR9EHVX-9	CR9EHIX-9
CR9EVX	CR9EIX
D10HS	–
D12E	R2349-11
D-4H	DR4HS
D6ES	D6EA
D-6H	D5HS
D6HS	D6HA
D6HV	D6HA
D7EV	DR7EIX
D7EVX	DR7EIX
D8EV	DR8EIX
D8EVX	DR8EIX
D8HS	D8HA
D8HV	D8HA
D9EV	DR9EIX
D9EVX	DR9EIX
DCP7EVX	DCPR7EIX
DCP8E	DCPR8E
DCP8EVX	DCPR8EIX
DCPR7E-N	DCPR7E-N-10
DCPR7EVX	DCPR7EIX
DCPR8EVX	DCPR8EIX
DCPR9EVX	DCPR9EIX
DIMR8A10	DIMR8A10
DIMR8A10	DIMR8C10
DIMR8B10	DIMR8A10
DP5EA-9	DPR5EA-9
DP7EV-9	DPR7EIX-9
DP7Z	DPR7Z
DP8EV-9	DPR8EIX-9
DP8EVX-9	DPR8EIX-9
DP9EV-9	DPR9EIX-9
DP9EVX-9	DPR9EIX-9





DP9Z	DPR9Z
DPR6EVX-9	–
DPR7EIX-9	DPR7EIX-9
DPR7EV-9	DPR7EIX-9
DPR7EVX-9	DPR7EIX-9
DPR8EV-9	DPR8EIX-9
DPR8EVX-9	DPR8EIX-9
DPR9EV-9	DPR9EIX-9
DPR9EVX-9	DPR9EIX-9
DR2HS	–
DR8EVX	DR8EIX
DR9EVX	DR9EIX
ER8EHIX	ER8EHIX
ER9EHIX	ER9EHIX
FR4	FR4
FR4	FR4
FR45	FR45
FR45	FR45
FR5	FR5
FR5	FR5
FR5-1	FR5-1
GR4	GR4
GR4	GR4
GR45	GR45
GR45	GR45
GR4VX	GR4
GR5	GR5
GR5	GR5
GR55	GR55
GR55	–
GR5VX	GR5IX
IFR7G-11K	IFR7G-11KS
IGR7A	IGR7A
IGR7B-10D	–
IKR9F8	IKR9J8
ILKAR6C10	ILKAR7C10
ILZKBR7A-8G	ILZKBR7B8DG
IRIWAY9	IRIWAY9
ITR5F13	TR5AI-13
IZFR5B	IZFR5B
IZFR6B	IZFR6B
J10A	JR10B
J10B	JR10B
J9B	JR9B
JR10A	JR10B
JR9A	JR9B
LFR5AIX-11	LFR5AIX-11
LFR5B	LFR5B
LFR6AIX-11	LFR6AIX-11
LFR6B	LFR6B
LKR9CI-8	ILKR9G8
LZKAR7A	LZKAR7A
PFR4B-11	PFR4G-11

PFR4C-11	PFR4G-11
PFR4F-11A	–
PFR4K-11	–
PFR4P-11	PFR4G-11
PFR5A-11	PFR5A-11
PFR5A-11B	–
PFR5B	PFR5B-9
PFR5B	PFR5B-9
PFR5B-11	PFR5B-11
PFR5B-11B	PFR5B-11B
PFR5B-11C	–
PFR5B-11C	PFR5B-11C
PFR5C-11	PFR5C-11
PFR5G-11	PFR5G-11
PFR5G-15E	PFR5G-11E
PFR5G-9	PFR5G
PFR5P	BKR5EQUPA
PFR5P-11N	FR5BP-11
PFR6A-11	PFR6A-11
PFR6A-11N	PFR6G-11
PFR6B	PFR6B
PFR6B-11	PFR6B-11
PFR6B-11B	PFR6B-11B
PFR6B-11C	PFR6B-11C
PFR6B-9	PFR6B-9
PFR6C-11	PFR6G-11
PFR6G	PFR6G
PFR6G-11	PFR6G-11
PFR6J-11	PFR6J-11
PFR6K-11	PFR6A-11
PFR6N-11	PFR6N-11
PFR6P	BKR6EQUPA
PFR7A-11A	–
PFR7B	PFR7B
PFR7B-11	PFR7B-11
PFR7B-11C	–
PFR7B-9	PFR7B-9
PFR7F-11A	–
PFR7G-11	PFR7G-11
PFR8B	PFR8B
PFR8B-9	PFR8B-9
PGR5A-11	PGR5A-11
PGR6A	PGR6A
PGR6A-11	PGR6A-11
PGR6B	PGR6A-11
PGR6B	PGR6A-11
PGR7A-11	PGR7A-11
PGR7A-11	–
PGR7A-D	–
PJR6A	–
PJR7A	PJR7A
PJR8A	–
PKR7A	PKR7A





PLFR6B-10	–
PLZKBR7A-G	PLZKBR7B8DG
PMR7A	PMR7A
PMR8A	PMR8A
PTR5A-13	PTR5A-13
PTR5C-15	–
PZFR5F	PZFR5F
PZFR5F-13	PZFR5F-13
PZFR6B	IZFR6B
PZFR6D-11	PZFR6J-11
PZFR6F	PZFR6F
PZFR6F-11	PZFR6F-11
PZFR6F-13	–
PZFR6R8EG	SIZFR6B8EG
PZFR7F	–
R0045A-10	R0045Q-10
R0045A-11	R0045J-11
R0045G-9	–
R0045J-10	R0045Q-10
R0045J-11	R0045Q-11
R015-10	R0373A-10
R015-8	CR8EIX
R015-9	R0373A-10
R015-95	R0373A-10
R016-10	R0373A-10
R016-105	R0373A-9
R016-11	R0373A-11
R016-11	R0373A-11
R0161-10	–
R0161-11	–
R0161-9	CR9HIX
R016-8	CR8EIX
R016-8	CR8EIX
R016-9	R0373A-10
R016E-11P	R0373A-11
R017-10	R0373A-10
R017-11	R0373A-11
R017-12	–
R017-8	CR8EIX
R017-9	R0373A-9
R017-S11	R0373A-11
R017-S12	R017-12
R018 G8	–
R018C-7	–
R018C-8	–
R0256K-11	R0373A-11
R0256R-10	R0373A-10
R2097-11P	R2525-10
R216-10	R2525-10
R216-11	R2525-10
R216-12	R2349-11
R216-9	R2525-9
R216-95	R2525-9

R217-10	R2525-10
R217-11	R2525-10
R217-12	R2349-11
R217-9	R2525-9
R217-95	R2525-9
R2198-12P	R2349-11
R2270-10	R2349-10
R2270-11	R2349-11
R2270-9	R2349-9
R2430-10	R2349-10
R2430-9	R2349-9
R2525-11	R2349-11
R4118M-10	R4118S-10
R4118M-105	R4118S-105
R4118M-11	–
R4118M-7	R7376-7
R4118-M75	R4118S-75
R4118-M8	R4118S-8
R4118M-85	R4118S-85
R4118-M9	BR9EIX
R4118M-95	R4118S-95
R4118S-10	BR10EIX
R4118S-105	–
R4118S-11	–
R4118S-7	R7376-7
R4118S-75	–
R4118S-8	BR8EIX
R4118S-85	–
R4118S-9	BR9EIX
R4118S-95	–
R4304A-10	BPR10EIX
R4304A-7	R7376-7
R4304A-8	BPR8EIX
R4304A-9	BPR9EIX
R4339-10	B10EG
R4339-8	B8EG
R4339-9	B9EG
R4452D-10	R7376-10
R4452D-105	B105EGP
R4452D-11	B11EGP
R4452D-8	BR8EIX
R4452D-85	B85EGP
R4452D-9	BR9EIX
R4452D-95	B95EGP
R4468-10	R6725-10
R4468-105	R6725-105
R4468-11	R6725-11
R4468-115	R6725-115
R4468-9	R6725-9
R4468A-10	R6725-10
R4468A-105	R6725-105
R4468A-11	R6725-11
R4468A-115	R6725-115





R4468A-9	R6725-9
R4630A-10	R7376-10
R4630A-105	R7376-10
R4630A-11	R7376-10
R4630A-8	R7376-8
R4630A-9	R7376-9
R5184-105	R7282-105
R5184-11	R7282-11
R5184-9	–
R5184-95	–
R5300A-10	R7282-10
R5300A-105	R7282-105
R5300A-11	R7282-11
R5300A-9	R7282-9
R5300A-95	–
R5300N-105	R7282-105
R5400-10	R7435-10
R5400-7	BCPR7EIX
R5400-8	R7435-8
R5400-9	R7435-9
R5525-10	BR10HIX
R5525-11	BR10HIX
R5525-7	BR7HIX
R5525-8	BR8HIX
R5525-9	BR9HIX
R5530-11	BR10HIX
R5530-8	BR8HIX
R5540-10	R5540F-10
R5540-105	R5540F-105
R5540-95	R5540F-10
R5540B-105	R5540F-105
R5540F-10	–
R5540F-105	R6179A-105P
R5540F-11	R7282-11
R5649-10	R6712-10
R5649-9	R6712-9
R5671-8	R5671A-8
R5671-9	R5671A-9
R5672-8	R5672A-8
R5672-9	R5672A-9
R5686-10	R7436-10
R5686-11	R7436-10
R5686-8	R7436-8
R5686-9	R7436-9
R5687-10	R7436-10
R5687-8	R7436-8
R5687-9	R7436-9
R5796-8	R7436-8
R5830-10	R7436-10
R5830-9	R7436-9
R5883-11	R6601-11
R5883-9	R6601-9
R6021E-85	R6918B-9

R6021E-9	R6918B-9
R6061-8	BR8ECMIX
R6120-10	R7282-10
R6120-10	R7282-10
R6120-105	R7282-105
R6120-11	R7282-11
R6120-11	R7282-11
R6120A-10	R7282A-10
R6120A-105	R7282A-105
R6120A-105	R7282A-105
R6120A-11	R7282A-11
R6120A-11	R7282A-11
R6120C-105	R7282-105
R6120C-11	R7282-11
R6120M-105	R7282-105
R6120M-11	R7429A-10
R6179A-105P	R7282-105
R6179A-105P	R7282-105
R6205-8	R7433-8
R6205-9	R7433-9
R6242-10	R7434-10
R6242-10	R7434-10
R6252E-8	R7376-8
R6252E-9	R7376-9
R6254E-8	R6254E-9
R6255-10	R7112-10
R6255-7	R7112-7
R6255-8	R7112-8
R6255-9	R7433-9
R6326-9	R7433-9
R6385-105P	R7376-10
R6385-105P	R7376-10
R6385-10P	R7376-10
R6385-11P	R7376-10
R6385-11P	R7376-10
R6385-8P	R7376-8
R6385-8P	R7376-8
R6385-9P	R7376-9
R6385-9P	R7376-9
R6469-9	–
R6711-10	R6601-9
R6711-9	R6601-9
R6850-8	–
R6888A-8	R7433-8
R7112-7	IRIWAY7
R7112-8	R7433-8
R7112-9	R7433-9
R7113-8	R7433-8
R7113-9	R7433-9
R7114-9	R7433-9
R7115-10	R7433-10
R7115-8	R7433-8
R7115-9	R7433-9





R7116-10	R7434-10
R7116-8	R7434-8
R7116-9	R7434-9
R7117-10	R7434-10
R7117-8	R7434-8
R7117-9	R7434-9
R7118-10	R7434-10
R7118-8	R7434-8
R7118-9	R7434-9
R7119-10	R7434-10
R7119-8	R7434-8
R7119-9	R7434-9
R7232-10	R7435-10
R7232-7	BCPR7EIX
R7232-8	R7435-8
R7232-9	R7435-9
R7233-10	R7435-10
R7233-7	BCPR7EIX
R7234-10	R7436-10
R7234-8	R7436-8
R7234-9	R7436-9
R7235-10	R7435-10
R7235-8	R7435-8
R7235-9	R7435-9
R7236-10	R7436-10
R7236-8	R7436-8
R7236-9	R7436-9
R7238-10	R7436-10
R7238-8	R7436-8
R7238-9	R7436-9
R7239-10	R7436-10
R7239-9	R7436-9
R7279-10	R7434-10
R7279-9	R7434-9
R7282C-105	R7282-105
R7282C-11	R7282-11
R7282M-105	R7282-105
R7282M-11	R7429A-10
R7282M-115	R7282-11
R7442B-10	–
R8102-10	R8102A-10
R8102-9	R8102A-9
R8102A-9	–
R8108-10	R8108A-10
R8108-95	R8108A-10
R8108A-10	–
R8108A-105	–
R8108A-11	–
RE6A-L	RE6C-L
RE7A-L	RE7C-L
RE8A-L	RE8C-L
SD10	BUR9EQ
SD8	BUR8EQ

SD9	BUR9EQ
SR5	TR5-1IX
SR5	TR5-1
SR5-1VX	TR5IX
SR5VX	TR5-1IX
T7341A-7	IRITOP7
TR4	TR4
TR4	TR4
TR4-2	TR4IX
TR4-2	TR4
TR4-2VX	TR4IX
TR4VX	TR4IX
TR5	TR5
TR5	TR5
TR5-1	TR5-1
TR5-1	TR5-1
TR5-1VX	TR5-1IX
TR55	TR55
TR55	TR55
TR55-1	TR55-1
TR55-1VX	TR55-1IX
TR55GP	TR55IX
TR55VX	TR55IX
TR5A-10	TR5B-13
TR5A-10	TR5A-10
TR5B-13	TR5B-13
TR5VX	TR5IX
TR6	TR6
TR6B-13	–
UR4	UR4
UR4	UR4
UR40	UR45
UR45	UR45
UR45	UR45
UR45VX	UR45IX
UR4VX	UR4IX
UR5	UR5
UR5	UR5
UR55	UR55
UR55	UR55
UR55VX	UR55IX
UR5VX	UR5IX
UR6	UR6
UR6VX	UR6IX
WR4-1	WR4-1
WR4-1	WR4-1
WR4-1	WR4-1
WR5	WR5
WR5	WR5
WR5	WR5
WR5GP	WR5IX
WR5VX	WR5IX
XFR5A-11	PFR5G-11



[illegible]



This catalogue supersedes all previous catalogs.

NGK Spark Plug Europe GmbH has made its best effort to ensure an accurate information, based on information available at the time of the compilation of the catalog.

This catalog is made for information only. NGK Spark Plug Europe GmbH will not accept liability for any inaccuracy.

Product linkage to vehicles or tools applications from this publication are considered under normal condition of use, fitted by a professional and for vehicles registered in Europe.

For all different usage or post equipment, the responsibility of NGK cannot be engaged. All ordered products are subject to valid terms and conditions supplied by NGK Spark Plug Europe GmbH.

The cross reference list (page 389–440) is furnished as a guide.

Due to differences in design, materials, etc., products by various manufacturers may not match. See therefore our recommendation for the proper use of the acquired product.

Pictures, diagrams and drawings in this publication are not contractual. The property of the pictures, diagrams, drawings and other graphic elements and data belong to NGK Spark Plug Europe GmbH exclusively. Reproduction of this publication, partial or total, is strictly prohibited without a prior written authorization of NGK Spark Plug Europe GmbH.



PRODUCT PORTFOLIO



IGNITION
PARTS




VEHICLE
ELECTRONICS

NGK | NTK offers a comprehensive range of products for the Aftermarket. Four markets (automotive, motorcycle, power tools, and marine) are supplied with more than 60,000 applications covering eight product lines.

With its two strong brands and countless products to choose from, NGK | NTK is the world's largest supplier of spark plugs and oxygen sensors. While NGK Ignition Parts stands for the ultimate in performance – from spark plugs and glow plugs to ignition coils and ignition leads –, NTK Vehicle Electronics, the precision brand, offers vehicle electronics and great business opportunities.

All we do, innovate and produce, perfectly reflects our ultimate aim: Performance through Precision, Precision for Performance.

**4
MARKETS**

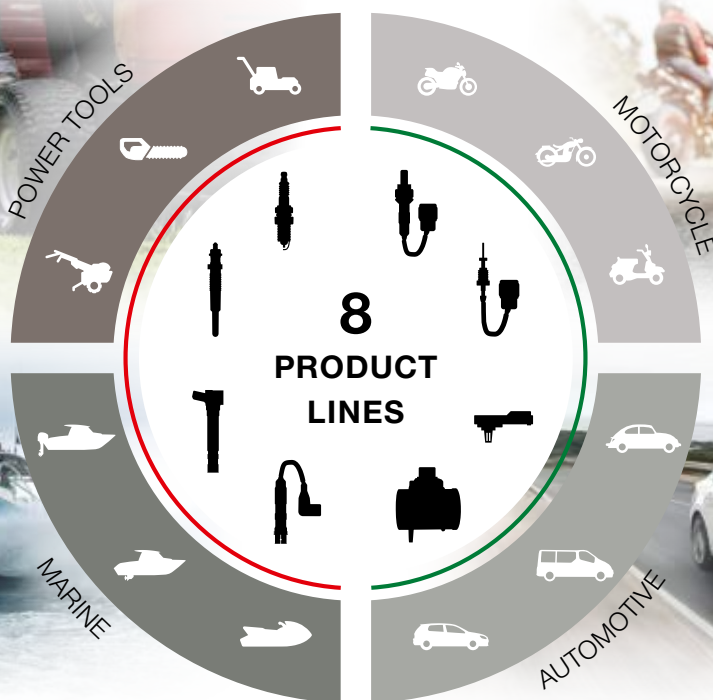

NGK – POWERED BY PERFORMANCE



Spark Plugs



Glow Plugs



Ignition
Coils



Ignition
Leads

NTK – POWERED BY PRECISION



Oxygen
Sensors



Temperature
Sensors




Mass Air
Flow (MAF)
Sensors



Manifold/Boost
Pressure (MAP)
Sensors



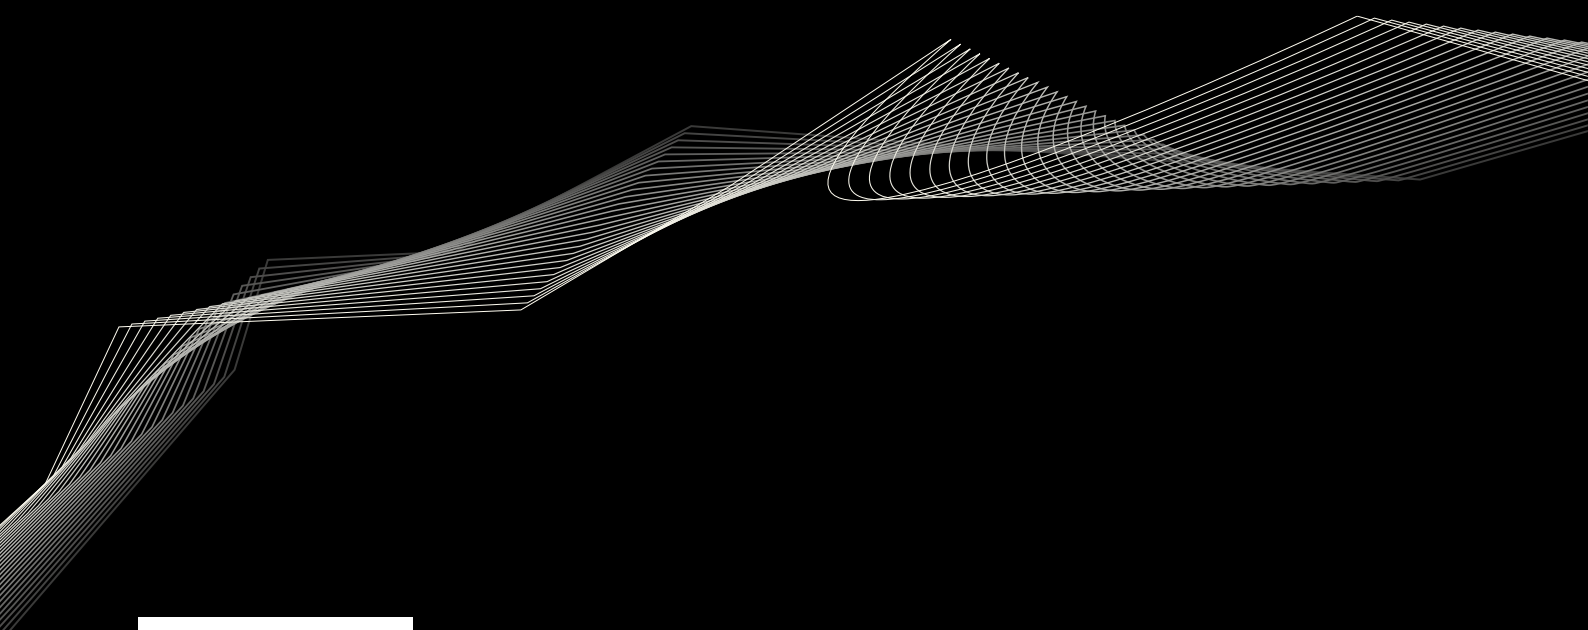

NGK SPARK PLUG EUROPE GmbH

Harkortstraße 41 // 40880 Ratingen // Germany
Tel.: +49 (0) 2102 974-000 // Fax.: +49 (0) 2102 974-149
www.ngk-europe.com

NGK | NTK
SPARK PLUGS | TECHNICAL CERAMICS
NGK SPARK PLUG EUROPE GmbH